


Landscape Inspiration Catalog





COUNTY MATERIALS CORPORATION Customer Service • ph: 800-242-7733 • info@countymaterials.com

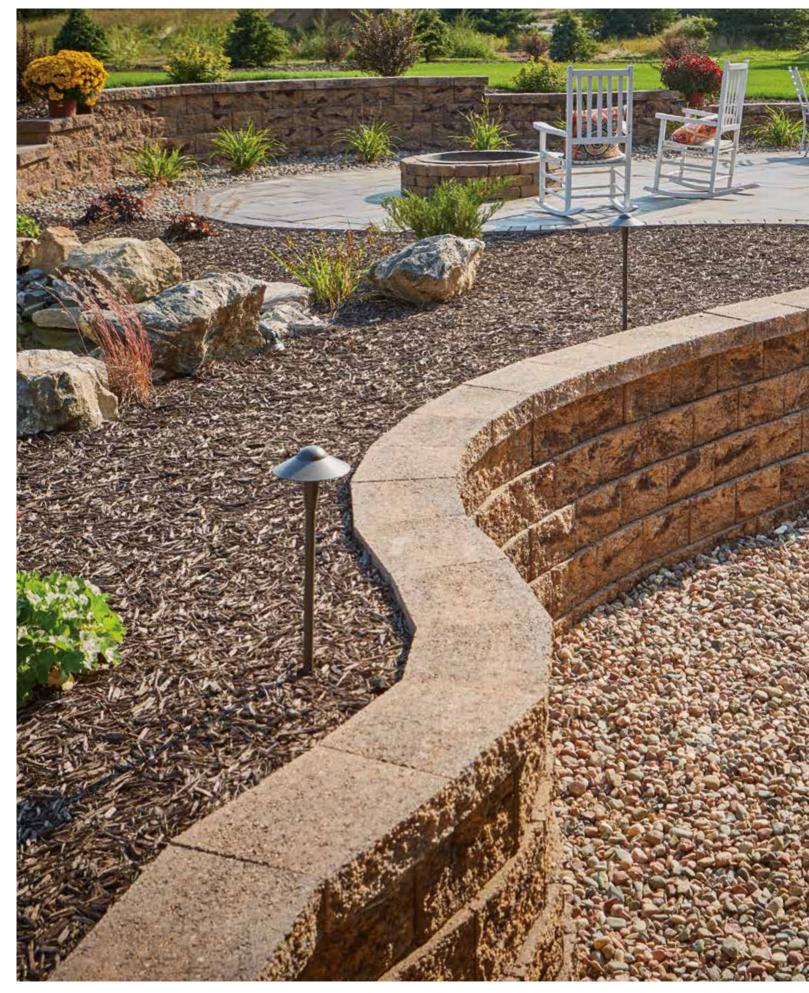



Landscape Inspiration Catalog 2018

Contents

Introduction2
Face-mix Technology 3
Landscape Product Technical Data 4
Warranty Information 9
Landscape Product Colors 10
Resources, Events & Education
Pavers, Slabs & Patio Stones 15
Elements™ Paving Stones17
Tranquility® Pavers
Grand Milestone® Pavers
Milestone® Pavers
Destination® Pavers
Lifestyle® Pavers
& Grand Lifestyle® Pavers
Essence [™] Wood Grain Plank Pavers
Skylands™ Concrete Deck Pavers
Crest™ Bullnose Pavers
Permeable Pavers
H ₂ O Pro® Pavers Permeable Paving Units
Renewable™ Pavers Permeable & Sandset
Harmony™ Permeable Pavers
Dimetta® Pavers 85
Paver Borders & Accents
Related Paver Items
Retaining Walls
Rib Rock™ Landscape Block
County Block® Retaining Wall System
County Cub® Landscape Units117
Integrity™ Retaining Wall System
Winston® Retaining Wall System
Terrace Stone® Retaining Wall System
Navaro® Retaining Wall System
Landscape Step Units
Oversize Landscape Step Units
Wall Caps and Related Retaining Wall Items
Wall caps and helated hetalling wall terns
Outdoor Living Products 155
Summit Stone® Landscape Units
Reflection Stone® Masonry Units 167
Align International Natural Stone Veneer Collection 175



Since starting with a single block machine in 1946, our family-owned, American-based company has grown to be a leader in the concrete construction and landscape products industry. Today we employ a team of 1,500 dedicated people, operate more than 40 locations in six states, and distribute our products nationwide.

With County Materials as your partner, you can design and build outdoor spaces using trusted products that are specified by industry professionals around the United States. As a result, our products are part of growing communities and projects of all sizes, including infrastructure, transportation, commercial, municipal, agricultural, and residential applications.

Leading by Example

As a strong supporter of industry education, County Materials hosts trainings and seminars, including ICPI certifications, NCMA certifications, AIA/CES learning unit presentations, and an Authorized Hardscape Contractor Program to advance our industry.



Showcasing Real-life Project Applications

This catalog is designed with you in mind. The pages are filled with project applications that have been installed by our customers around the country.

We invite you to look through our comprehensive landscape offerings to learn more, and visit us online at www.countymaterials.com.



Creating Distinctive Hardscape Products with Unmatched Advantages

Our inherently strong and superior performing concrete paving stones and slabs are crafted using face-mix technology. The upper portion of each concrete paver features a permanent blend of our high-strength concrete comprised of vibrant color pigments and surface materials that results in a fine finish. This advanced and automated process concentrates the purest color pigments, finest aggregates and dense concrete mix in the top surface layer of each paving stone where it is visible and matters most. Larger aggregates in the base mix impart added strength that meets ICPI and ASTM standards.

Our commitment to manufacturing excellence doesn't stop with surface beauty. Our pavers and slabs repel stains and withstand every day wear and tear, offering lasting durability, from light pedestrian to heavy vehicular applications.

Their high strength, combined with non-fading colors and natural beauty will stand the test of time. They possess extremely accurate dimensional tolerances, higher surface density, and absorption and abrasion resistance. Our pavers are further enhanced by their appealing and sought after aesthetics, unique to North America.


County Materials began as a concrete block manufacturer more than 70 years ago. As a result, we have acquired extensive knowledge, experience, and manufacturing capabilities for segmental retaining wall units. Our retaining wall systems are ideal solutions for diverse and challenging applications. This includes residential garden walls, raised patios, pillars or seat walls to light commercial and even impressive engineered walls that provide effective soil retention and multi-level terracing advantages. Additionally, all of our wall products compliment our pavers and slab series for cohesive, integrated outdoor spaces.

Face-mix Technology

Fine aggregates and a dense concrete mix are concentrated in the top surface to provide a smooth, refined surface.

Our face-mix is integrally bonded to the base mix offering exceptional durability combined with outstanding aethestics for any application.

Pure color pigments and fine aggregates blended on the surface provide vibrant, rich looking and long-lasting color.



The base concrete mix features larger aggregates for high compressive strength.

- Made of high strength concrete, high density units resist cracking and damage from freeze-thaw cycles.
- County Materials pavers and slabs are manufactured to meet industry standards for strength, absorption, and are backed by our customer warranty.





Color Selection

Colors shown may vary from actual hues and should only be used as a guide. Refer to actual product samples for final color selection. Because concrete products are manufactured with high quality, naturally-mined aggregates and materials, variations in color or shading should be expected in products that are manufactured at different times and in units having different shapes. This color or shading variation is acceptable in the industry. County Materials recommends immediately verifying the product and color upon receipt, and prior to opening pallets. For any discrepancies, contact your local County Materials representative before installation. Use of product constitutes acceptance.

Proper Color Distribution and Installation

Color of concrete products may vary significantly between production lots. Install concrete units from several pallets to ensure distribution of color. The contractor must install concrete units in accordance with the landscape industry's best practices according to ICPI and NCMA Standard Specifications and the manufacturer's instructions. County Materials is not liable or responsible for loss or damage resulting from improper use, handling or failure to follow installation instructions. Follow all applicable warnings, advisories, and instructions.

Efflorescence

Efflorescence is a naturally occurring process in all concrete products which may appear in the form of a white powdery film on the unit's surface. Efflorescence may be more perceivable in darker colors. It does not, in any way, compromise the functionality or the structural integrity of the product or your installation. Although

efflorescence cannot be prevented, it will wash off over time or it can be cleaned with an industry cleaner. County Materials accepts no responsibility or liability for the occurrence of efflorescence.

Joint Material

There are many different jointing materials specific to application requirements and desired results. Joint material should be completely removed from the surface of the pavers. ASTM C144 specifies natural sand as the paver jointing material for use with County Materials' concrete pavers, along with a sand joint stabilizer. Polymeric sands should not be used on pavers with heavily textured surface. Use of joint material must comply with all instructions provided by the joint material manufacturer, and the joint material method must be performed on a separate mock-up sample not less than 7 feet by 7 feet prior to Buyer approval. County Materials accepts no responsibility or liability for the use of joint material with our concrete pavers.

Polymeric Haze

Polymeric haze from the use of polymeric joint sand may appear on concrete paver products if the sand was not installed properly or removed from the surface of the pavers properly. This does not, in any way, compromise the functionality or the structural integrity of the product or your installation. The hazing will weather away naturally with time and rain. Polymeric haze may be removed with an industry cleaner. County Materials accepts no responsibility or liability for the use of polymeric sand with our concrete pavers or any occurrence of polymeric haze or other undesired result.

Washing Guidelines

Seasonal maintenance is recommended for all County Materials pavers and slabs. General washing guidelines are provided for the following: organic stains, including fruit, soil and leaf residue, algae and moss stains, and efflorescence. For efflorescence stains, wash with a hose and stiff broom or pressure washer. Care must be taken if pressure washing is done to avoid removing excess joint sand or damaging paving material. Water pressure should be comparable to the average pressure from a home watering hose.

Cleaning Agents

Concrete cleaning agents are not required but are an option for all County Materials pavers and slabs. There are many different cleaning agents specific to application requirements and desired results. Use of the cleaning agent must comply with all instructions provided by the cleaning agent manufacturer, and the cleaning agent method must be performed on a separate mock-up sample not less than 7 feet by 7 feet prior to Buyer approval. County Materials accepts no responsibility or liability for the use of cleaning agents on our pavers and slabs.

Sealers

A concrete sealer application is not required on County Materials pavers and slabs but is an option. There are many different sealing agents specific to application requirements and desired results. Use of the sealing agent must comply with all instructions provided by the sealing agent manufacturer, and the sealing agent method must be performed on a separate mock-up panel not less than 7 feet by 7 feet prior to Buyer approval. County Materials accepts no responsibility or liability for the use of sealers on our pavers and slabs.

Construction Residue

A possible by-product of cutting concrete units during installation with a saw is residue-filled water or concrete dust. Residue-filled water or re-hydrated dust can cling to the surface of units and leave a concrete stain. It is recommended to wash and remove the water or concrete dust from the surface of the pavers before it dries. Construction residue can also happen through soil disturbance or environmental elements. These contaminants should be removed immediately; they do not compromise the functionality or the structural integrity of the product or your installation. County Materials accepts no responsibility or liability for the occurrence of construction residue or concrete stains.

Compactor and Snow Removal Equipment

Textured paver and patio stone surfaces require a buffer between the plate compactor and the paver surface to prevent scuffing. Refer to County Materials' Interlocking Concrete Paver or Slab Installation Guidelines. Also, snow removal equipment should have the proper spacing, bumper, and rubber blade guards to protect the surface of the pavers. County Materials accepts no responsibility or liability for damage caused by the use of compaction or snow removal equipment that may leave scuffs, burns or other markings on pavers.





ASTM Guidelines for Interlocking Concrete Pavers and Slabs

County Materials provides general construction guidelines to design professionals and installers of interlocking concrete pavers and concrete slabs. For additional installation information, reference the Interlocking Concrete Pavement Institute's (ICPI) Tech Spec Technical Bulletins.

All interlocking concrete pavers manufactured by County Materials are manufactured in general accordance with industry guidelines.

Characteristics	ASTM C936
Compressive strength	8000 psi at 28 days
Durability to freeze thaw cycles	Total mass loss after 50 cycles, no greater than 1%
Water absorption	Lower than 5%
Dimension tolerance	± 3 mm (1/8") Height
	\pm 1.58 mm (1/16") Length and width

All concrete slabs manufactured by County Materials Corporation are manufactured in general accordance with the following industry guidelines:

Characteristics	ASTM C1782 & C140
Flexural Strength	725 psi (min.)
Freeze-thaw durability with use of	Loss of 225g/m2 max. at 28 cycles
de-icing salt	Loss of 500g/m2 max. at 49 cycles
Water absorption	6% (max.)
Dimension tolerance	± 3 mm (1/8") Height
	± 2 mm (5/64") Length and width
Warpage	± 3 mm (1/8")



ASTM C1372 Standard Specifications for Segmental Retaining Wall Units


County Materials provides general construction guidelines to design professionals and installers of concrete retaining wall units. For additional information, reference the National Concrete Masonry Association's (NCMA) SRW Installation Guide.

All concrete retaining wall units manufactured by County Materials are manufactured in general accordance with the following industry guidelines.

Strength	Strength and Absorption Requirements (ASTM)									
Minimum Require	Minimum Required Net Average Compressive Strength, psi (MPa)									
Average of 3 Units Individual Unit 3000 (20.7) 2500 (17.2)										
Maximum Water Absorption Requirements Weight Classification Oven-Dry Density of Concrete lb/ft3 (kg/m3)										
Light Weight Less than 105 (1682) 18 (288)	Medium 105 (1682) to (200 15 (2	less than 125 02)	Normal Weight 125 (2002) or more 13 (208)							

Freeze-thaw Durability: In areas where repeated freezing and thawing under saturated conditions occur, freeze-thaw durability is required to be demonstrated by test or by proven field performance. When testing is required, the units are required to meet the following

when tested in accordance with ASTM C1262, Standard Test Method for Evaluating the Freeze-Thaw Durability of Manufactured Concrete Masonry Units and Related Concrete Units.

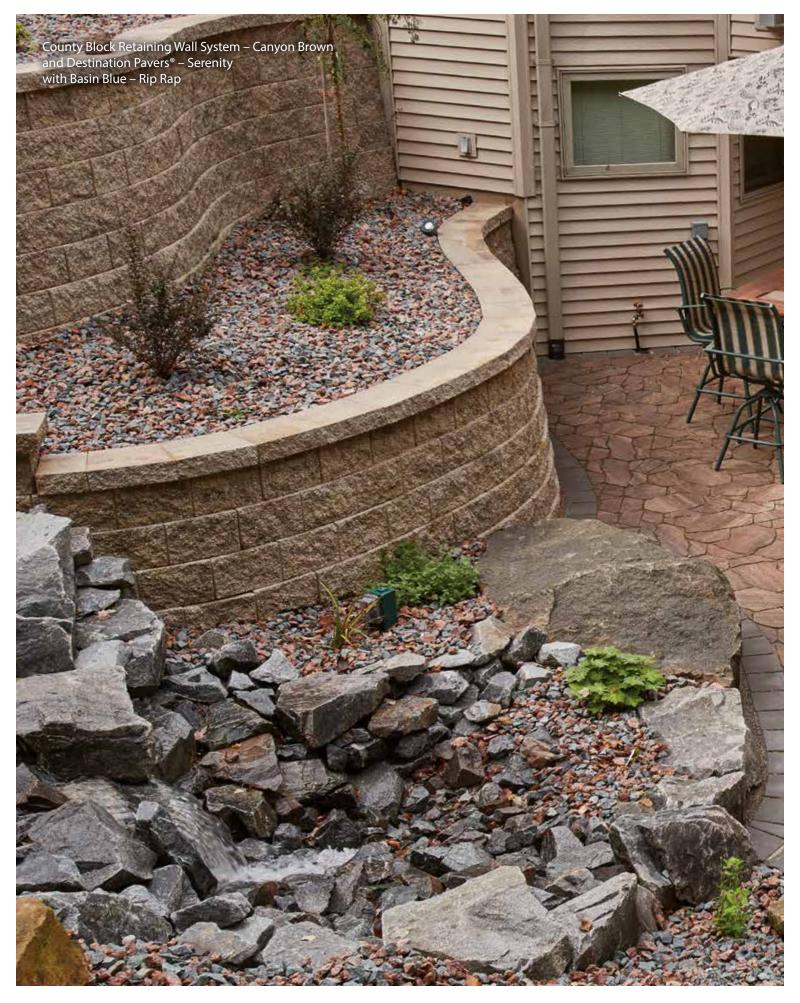

Warranty Information



Warranties for Concrete Landscaping Products

County Materials works continuously to provide value to our customers and enhance our manufacturing capabilities, all while surpassing our high standards of excellence. We manufacture our hardscape products to meet the industry's standards. That is why we back our hardscape products with an exclusive limited Warranty.

County Materials PAVER Products Warranty

COUNTY MATERIALS CORPORATION'S CONCRETE PAVERS MEET THE REQUIREMENTS OF APPLICABLE ASTM STANDARD(S). COUNTY MATERIALS WARRANTIES ITS CONCRETE PAVERS AGAINST MANUFACTURING DEFECTS FOR THE PERIOD OF YOUR RESIDENTIAL HOME OWNERSHIP. FOR COMMERCIAL PROJECTS, **COUNTY MATERIALS WARRANTIES ITS CONCRETE** PAVERS AGAINST MANUFACTURING DEFECTS FOR 5 YEARS AFTER SUBSTANTIAL COMPLETION OF THE PROJECT. THIS WARRANTY IS NON-TRANSFERABLE. THIS LIMITED WARRANTY DOES NOT APPLY TO DAMAGE CAUSED BY IMPROPER STORAGE, ABRASION, OVERLOADING, OR MISUSE, SUCH AS DELAMINATION, SPLITTING, CHIPPING, OR STAINING. THIS LIMITED WARRANTY APPLIES ONLY IF THE PRODUCTS ARE INSTALLED AS DIRECTED BY THE ICPI (WWW.ICPI.ORG) AND COUNTY MATERIALS' APPLICABLE INSTALLATION **GUIDELINES. IMPROPER INSTALLATION VOIDS THIS** LIMITED WARRANTY. THE ORIGINAL PROOF OF PURCHASE IS NECESSARY. COLOR MATCHING CANNOT BE GUARANTEED. THE FOREGOING LIMITED WARRANTY IS IN LIEU OF AND EXCLUDES ALL OTHER WRITTEN OR ORAL WARRANTIES, INCLUDING THE IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY. CUSTOMER'S EXCLUSIVE REMEDY FOR BREACH OF THE ABOVE LIMITED WARRANTY IS LIMITED TO COUNTY MATERIALS REPLACING THE PRODUCTS AT NO COST TO THE ORIGINAL CUSTOMER. COUNTY MATERIALS' LIBAILITY FOR BREACH OF THE ABOVE LIMITED WARRANTY SHALL NOT EXCEED THE PRICE OF THE PRODUCTS ACTUALLY RECEIVED BY CUSTOMER AND DOES NOT INCLUDE REPLACEMENT LABOR, CONSEQUENTIAL DAMAGES, OR INCIDENTAL DAMAGES.

County Materials RETAINING WALL Products Warranty

EXCLUSIVE LIMITED WARRANTY: Seller warrants that stock Products, to the extent they are manufactured by Seller, shall be free from manufacturing defects in materials and workmanship and meet the description and specifications established in Seller's published and internal standards (subject to reasonable variance in accordance with normal industry practice) for a period of thirty (30) days from delivery, and all other warranties are expressly disclaimed as described in the capitalized sentence below. Seller may, in its sole discretion, also rely on any generally accepted industry standards. Seller retains the right, however, to change the dimensions, composition, design, performance, color, and appearance of the Products without liability if, in Seller's judgment, the change is non-material. Seller warrants that non-stock Products manufactured by Seller meet only those specifications and standards provided by Buyer for a period of thirty (30) days from delivery, all other warranties are expressly disclaimed as described in the capitalized sentence below, and Buyer understands that that harmful cracking or other damage may occur if the Product specifications are not properly designed. Seller does not warranty any portion of Products not manufactured by Seller but Seller shall assign to Buyer, upon request, all assignable warranties of Seller's suppliers related to such Products. Acceptance by Buyer of the Products constitutes confirmation that Products meet the description set forth above. THE FOREGOING WARRANTY IS IN LIEU OF AND EXCLUDES ALL OTHER WRITTEN OR ORAL WARRANTIES, INCLUDING THE IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY, WHETHER EXPRESS OR IMPLIED BY LAW, INCLUDING THE UNIFORM COMMERCIAL CODE AS ENACTED IN THE STATE OF WISCONSIN OR ELSEWHERE. This limited warranty only applies if the Products have not been subjected to misuse, negligence, or accident and have not been unloaded, stored, installed, maintained, altered, or repaired in any manner that, in the Seller's judgment, adversely affects the condition or operation of the Products. Further, the foregoing limited warranty and the exclusive remedy below run only in favor of the original Buyer and may not be assigned or otherwise transferred.

EXCLUSIVE REMEDY: For any loss or damage arising out of supplying Products to Buyer, or the sale, operation, or use of the Productswhether such claim is based in contract, warranty, tort (including negligence) or other grounds—BUYER'S EXCLUSIVE REMEDY IS LIMITED, at Seller's sole discretion, to either: (1) refund by the Seller of the purchase price for any non-conforming Products sold hereunder; or (2) the repair or replacement of any non-conforming Products. UNDER THIS EXCLUSIVE REMEDY, BUYER SHALL NOT RECOVER ANY OTHER COSTS FROM THE SELLER, including but not limited to the costs for: return of non-conforming Products, delivery of replacement Products, removal of non-conforming Products, reinstallation of replacement Products (or products purchased to replace any non-conforming Products), and/or any labor charges incurred related to the Products. NO OTHER REMEDY SHALL BE AVAILABLE TO BUYER. ANY CLAIM FOR INCIDENTAL AND/OR CONSEQUENTIAL DAMAGES for lost profits, lost sales, injury to property, or any other incidental or consequential loss IS THEREFORE BARRED PURSUANT TO THE TERMS OF THIS EXCLUSIVE REMEDY. Seller will not be liable for any failure of Products to conform to the Exclusive Limited Warranty above caused by the unloading, storage, installation, or maintenance of the Products, or use of other products/ materials in conjunction with the Products that negatively impact the Product or otherwise do not conform with industry standards. The above limitations do not include damages related to personal injury.

Landscape Product Colors

						Ava	ilable	Mar	nufactured	On Demano	d •	Manufac	tured by Sp	oecial Orde
			Solid	Colors						Blende	d Colors	;		
Pavers & Slabs	Dream	Homecoming	Reflection	Reunion	Traditions	Vision	Haven	Oasis	Serenity	Timeless	Calm	Aware	Bliss	Pride
Elements™ Paving Stones														
Standard	•	•	•	•	•	•	•	•	•	•	•			
Rustic	0	0	0	0	0	0	0	0	0	0	0			
Barrel Tumbled	0	0	0	0	0	0	0	0	0	0	0			
Hammered Rustic	0	0	0	0	0	0	0	0	0	0	0			
Rough Estate	•	•	•	•	•	•	•	•	•	•	•			
Hammered	0	0	0	0	0	0	0	0	0	0	0			
Tranquility® Pavers														
Standard							•	•	•	•	•			
Rustic							0	0	0	0	0			
Grand Milestone® Pavers														
Standard							•	•	•	•	•			
Rustic							0	0	0	0	0			
Milestone® Pavers														
Standard							•	•	•	•				
Destination® Pavers														
Standard							•	•	•	•				
Lifestyle® Pavers and Grand Lifestyle® Pavers														
Standard							•	•	•	•				
Rustic							0	0	0	0				
Essence™ Wood Grain Plank Pavers														
Standard										•		•	•	•
Skylands™ Concrete Deck Pavers														
Standard	•	•	•	•	•	•	•	•	•	•				
Rustic	0	0	0	0	0	0	0	0	0	0				
Hammered	0	0	0	0	0	0	0	0	0	0				
Crest™ Bullnose Pavers														
Standard			•			•	•	•	•	•				
Barrel Tumbled			•			•	•	•	•	•				
Dimetta® Pavers														
Standard	•	•	•	•	•	•								

	Solid Colors							Blended Colors							
Permeable Pavers	Dream	Homecoming	Reflection	Reunion	Traditions	Vision	Haven	Oasis	Serenity	Timeless	Enduring	Paradise	Peace	Sanctuary	
H₂O Pro® Pavers Permeable Paver System															
Standard			•			•	•	•	•	•					
Rustic			0			0	0	0	0	0					
Barrel Tumbled			0			0	0	0	0	0					
Hammered Rustic			0			0	0	0	0	0					
Rough Estate			•			•	•	•	•	•					
Renewable™ Pavers Permeable Paver System & Sandset Pavers															
Standard	•	•	•	•	•	•	•	•	•	•					
Rough Estate	•	•	•	•	•	•	•	•	•	•					
Harmony™ Permeable Pavers															
Standard	•	•	•	•	•	•					•	•	•	•	


		S	olid Col	ors			Blended Colors								
Retaining Walls	Brown	Buff	Gray	Natural Gray	October Oak	Canyon Brown	Desert Vista	Haven	Hickory Blend	Hush	Rio Grande	Serenity	Silvertone	Swiss Mocha	Timeless
Rib Rock™ Landscape Block															
Standard				•											
Tribute® Retaining Wall System Appleton, WI															
Standard	•	•	•			•			•				•	•	
Tribute® Retaining Wall System Roberts, WI															
Standard	•	•	•		•	•			•				•	•	
Rustic	•	•	•			•			•				•		
County Block® Retaining Wall System Appleton, WI															
Standard	•	•	•			•			•				•	•	
County Block® Retaining Wall System Marathon, WI															
Standard	•		•			•			•				•		
County Block® Retaining Wall System Roberts, WI															
Standard	•	•	•			•			•				•	•	
Rustic/Heavy Rustic	•												•		
County Cub® Landscape Units															
Standard	•		•			•	•		•		•		•		
Winston® Retaining Wall System															
Standard	•		•			•							•		
Integrity™ Retaining Wall System															
Standard		•	•					•		•		•			•
Rustic		•	•					•		•		•			•
Heavy Rustic		•	•					•		•		•			•
Terrace Stone® Retaining Wall System															
Standard	•		•			•							•		
Navaro® Retaining Wall System															
Standard	•		•			•			•				•		

						Blende	ed Colors	;						
Outdoor Living Products	Clarity	Devotion	Enchantment	Haven	Hush	Insipred	Noble	Promise	Pure	Solace	Stillness	Timeless		
Summit Stone® Landscape Units														
Tumbled				•	•					•		•		
Reflection Stone®														
Standard	•	•	•			•	•	•	•		•			
Rustic	•	•	•			•	•	•	•		•			
Reflection Stone® GRAND														
Standard	•	•	•			•	•	•	•		•			
Rustic	•	•	•			•	•	•	•		•			
Reflection Stone® Brick														
Standard	•	•	•			•	•	•	•		•			
Rustic	•	•	•			•	•	•	•		•			



Resources

For additional product information including technical data, specifications, or specific product brochures and catalogs, visit our Resources on our website at www.countymaterials.com.

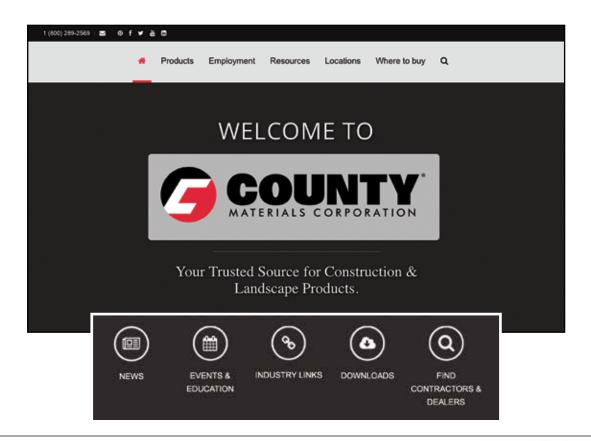

Product Specifications on ARCAT

County Materials posts product specifications on ARCAT. Find County Materials' Product Specifications by clicking on our Resources Library.



Product CAD Details

County Materials offers product CAD details on ARCAT that can easily be downloaded, customized for your residential or commercial project, and included in your CAD library for future use. Click on our Resources library to access them.



SRW Engineered Retaining Wall Manuals

We offer Engineered Retaining Wall Manuals by Hardscape Technical Services for our line of engineered retaining wall systems. Contact your local County Materials representative on how to obtain one of these manuals or go online to our Resources page where you can download one for free under Product Installation & Maintenance Guides.

- County Block® Retaining Wall System
- County Block® Jumbo Retaining Wall System
- Rib Rock™ Landscape Block
- Tribute® Retaining Wall System
- Integrity™ Retaining Wall System



Events & Education

County Materials periodically sponsors or hosts various seminars, events or tradeshows aimed at educating contractors, architects and engineers on hardscape products and practices.

More project owners and construction professionals are requiring hardscape contractors to fulfill and maintain industry-approved training credentials because they recognize the value of using professionals who stand behind their workmanship and uphold industry standards. County Materials actively supports and sponsors industry training and education for professional hardscape contractors to improve the quality of interlocking and permeable paver and retaining wall installations.

Additionally, County Materials provides a variety of industry resources designed to strengthen sales and enhance workmanship to a higher professional level. Improving the quality of paver and retaining wall installations is a win-win for contractors and our industry. Details are available by talking to your County Materials representative, contacting our Customer Service Department at (800) 242-7733 or e-mail us at info@countymaterials.com.

AIA/CES and LA/CES Continuing Education for Credit Seminars

County Materials Corporation, and our industry associate AIA/CES Providers, offer several AIA/CES and LA/CES approved courses for architects, landscape architects, engineers, developers and builders interested in learning more about diverse construction products. Instructors will set up at your work place and provide a complimentary lunch to all program attendees.

Available Courses:

- Concrete Roof Deck Paver System
- Burnished Concrete Masonry
- Decorative Concrete Face & Thru Wall-Load Bearing Brick
- Permeable Paver Design & Performance II
- Concrete Pavers in Commercial Applications
- Concrete Thin Veneers The Advantages of Concrete Thin Veneers
- Concrete Masonry Veneer Units

Additional learning seminars are offered to construction and masonry industry professionals. Please contact your County Materials Representative for more information.







Pavers, Slabs & Patio Stones


- Elements™ Paving Stones
- Tranquility® Pavers
- Milestone® Pavers
 & Grand Milestone® Pavers
- Destination® Pavers
- Lifestyle® Pavers & Grand Lifestyle® Pavers
- Essence[™] Wood Grain Plank Pavers
- Skylands™ Concrete Deck Pavers
- Crest[™] Bullnose Pavers
- H₂O Pro® Pavers Permeable Paving Units
- Renewable™ Pavers Permeable & Sandset
- Harmony™ Permeable Pavers
- Dimetta® Pavers
- Paver Border & Accents

Related Paver Items:

- Grass Pavers
- Smooth Round Patio Stones
- Smooth Square Patio Stones
- BrickfacePatio Stones
- Veranda & Courtyard Patio Stones
- Patio Block
- Bullet Edgers
- Paver Sand


- Edging
- Paver Lights
- Cleaners & Enhancers
- Air Conditioner Pads
- Parking Curbs
- Pole Pads
- Splash Block
- Sign Post Bases

The color photos shown in this catalog were prepared with careful attention to accuracy. However, colors shown may vary from actual hues and should only be used as a guide. Refer to actual product samples for final color selection. Because concrete units are manufactured with high quality, naturally-mined aggregates and materials, variations in color or shading should be expected in products that are manufactured at different times and in units having different shapes. This color or shading variation is acceptable in the industry.

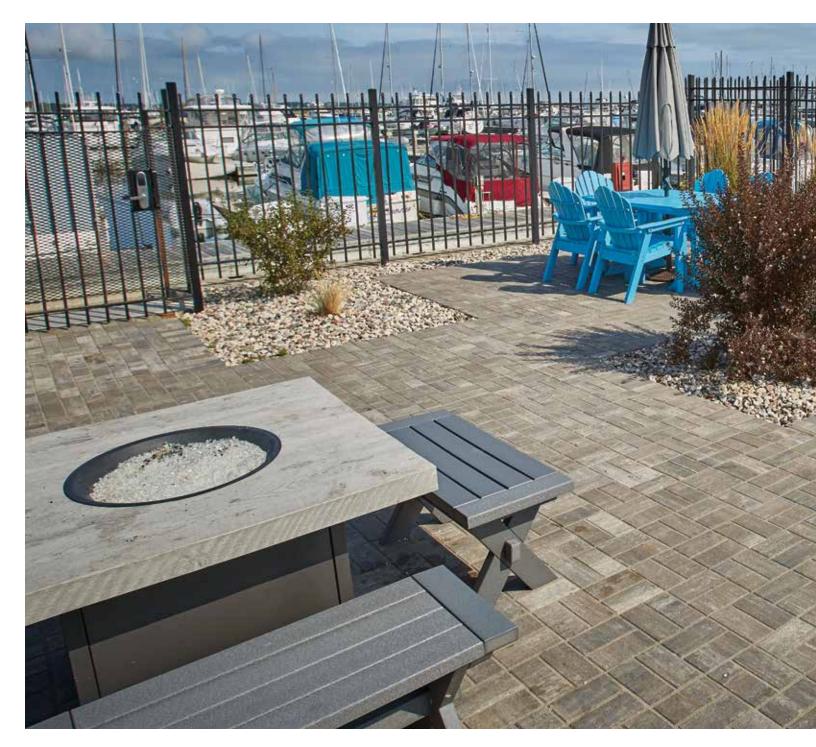

Elements[™] Paving Stones

Elements Paving Stones offer a refined appearance that seamlessly integrates into any environment.

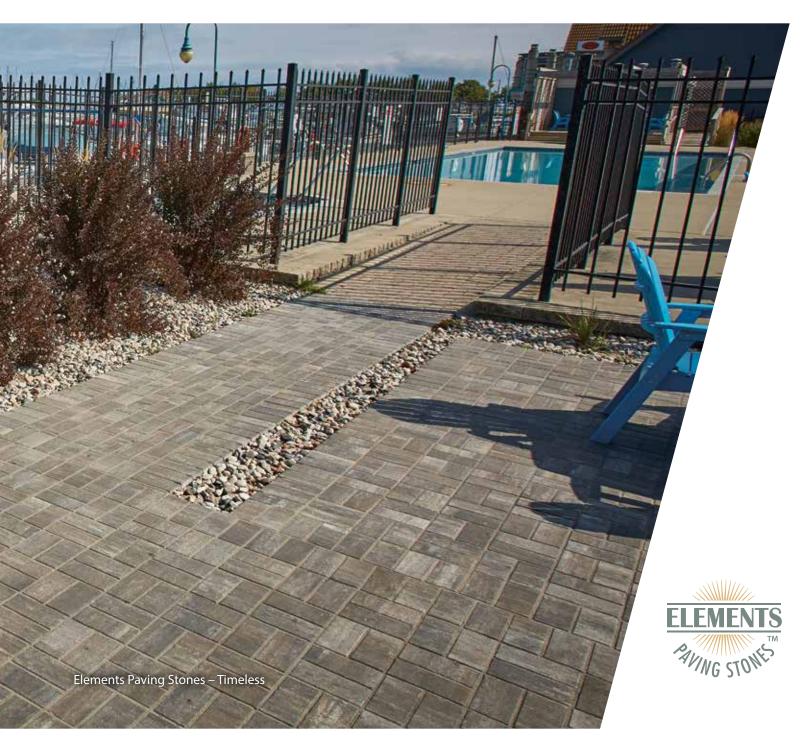







Manufactured with superior surface durability, **Elements™ Paving Stones** have a flat surface and slightly chamfered edges that embody fine cut jewels for a feeling of ultimate luxury. Units are designed for those looking for the perfect balance between technical functionality and aesthetic appeal. Elements Paving Stones have uniform shapes and dimensionally compatible sizes to create uncomplicated presentations. Additionally, Elements Paving Stones are available in many unique color blends and surface treatments for boundless possibilities of expression and composition.

Sizes Elements Paving Stones

	D x H x L (Nominal Size) Inches • Millimeters	SF/Unit	Units/ SF	SF/ Layer	Layers/ Pallet	SF/ Pallet	Units/ Layer	Units/ Pallet	Lbs/ Pallet
A 📦	$4 \times 2^{3}/4 \times 8 \cdot 102 \times 70 \times 203$.22	4.5	11	8	88	50	400	2820
В	8 x 2 ³ / ₄ x 8 • 203 x 70 x 203	.44	2.25	13.33	8	106.64	30	240	3380
	8 x 2 ³ / ₄ x 16 · 203 x 70 x 406	.89	1.13	13.33	8	106.64	15	120	3305
D	16 x 2¾ x 16 · 406 x 70 x 406	1.78	.56	16.02	6	96.12	9	54	3080
E	12 x 2¾ x 24 • 304 x 70 x 609	2	.5	12	8	96	6	48	3130
F	24 x 2 ³ / ₄ x 24 · 609 x 70 x 609	4	.25	8	8	64	2	16	2095

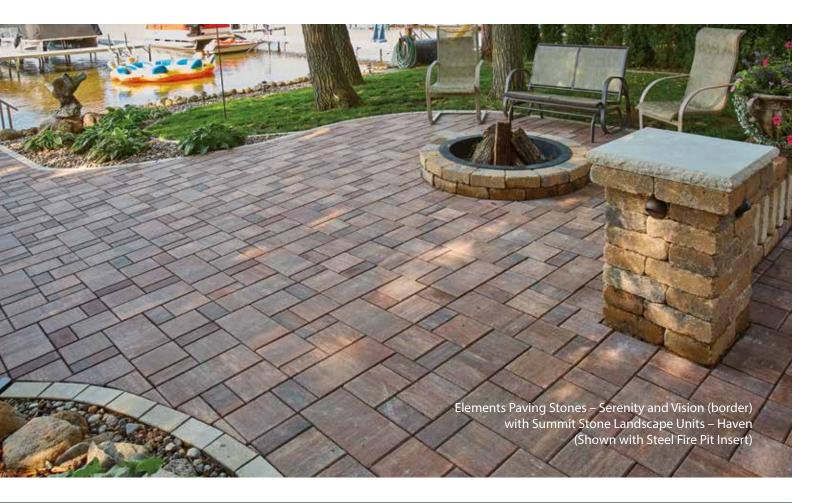


Layer Patterns Elements Paving Stones

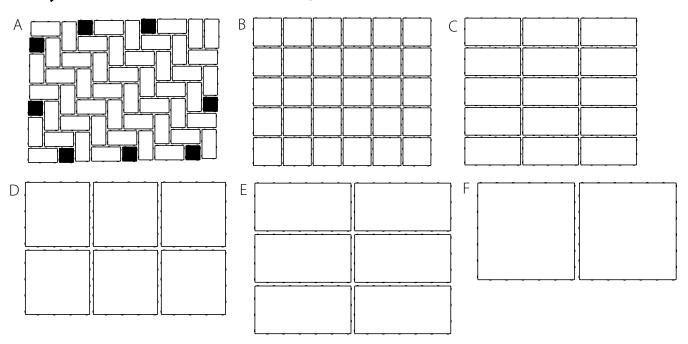


Note: 4" x 4" fillers (see black squares in illustration for layer pattern "A") are used to keep the integrity of a layer when placed by a machine. They are no charge and not sold separately. If 4" x 4" fillers are used in a pattern and more are needed, installers can cut 4" x 8" pavers in half and install where needed.

Note: Because of our Hammered process, the layer pattern on a pallet of Hammered pavers will not match the layer pattern as illustrated. Hammered pavers also include (8) 4"x 4" fillers in each layer. The fillers are no charge and not sold separately. If fillers are used in a pattern and more are needed, installers can cut 4"x 8" pavers in half and hammer them to get the Hammered look.

Installation Patterns Elements Paving Stones

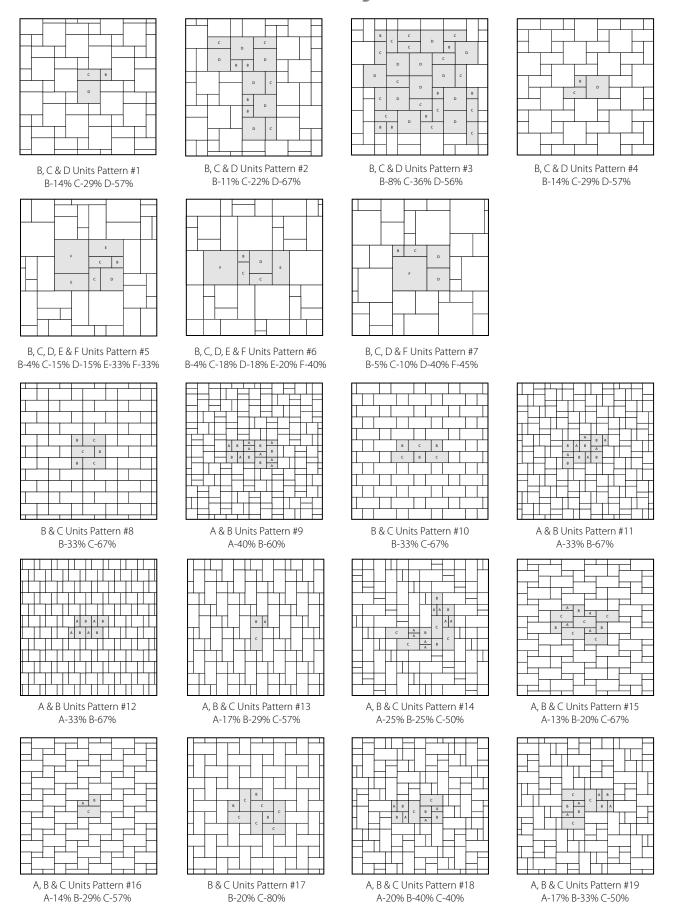


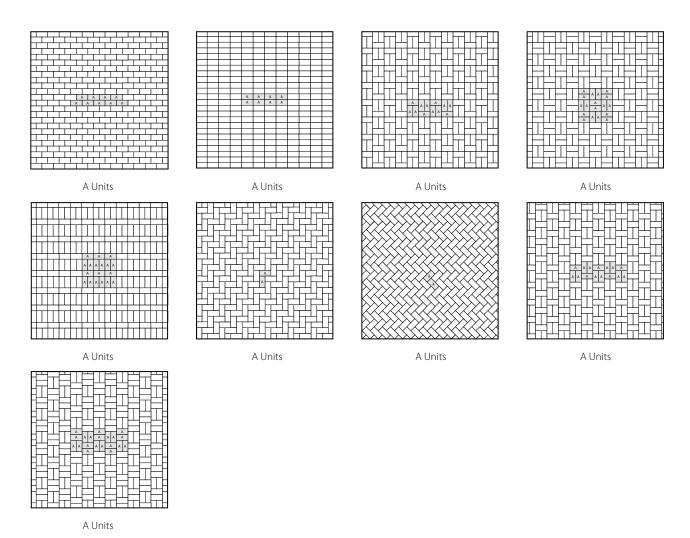




Color Options Elements Paving Stones

Blended Colors

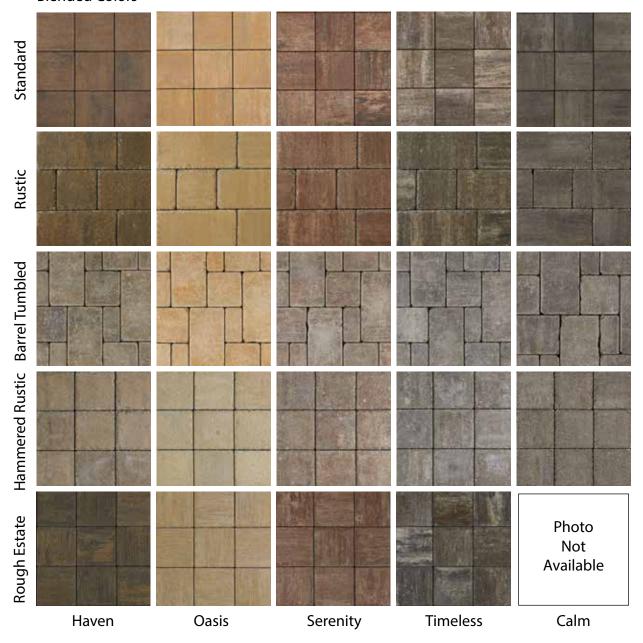

- Standard Colors available in all 6 sizes.
- Rustic Colors are manufactured On Demand and available in all 6 sizes.
- Barrel Tumbled Colors are manufactured On Demand and available in 4"x 8", 8"x 8" and 8"x16"
- Hammered Colors are manufactured On Demand and available in all 6 sizes (Photos not available).
- Hammered Rustic Colors are manufactured On Demand and available in all 6 sizes.
- Rough Estate Colors are manufactured by Special Order and available in all 6 sizes.

Solid Colors

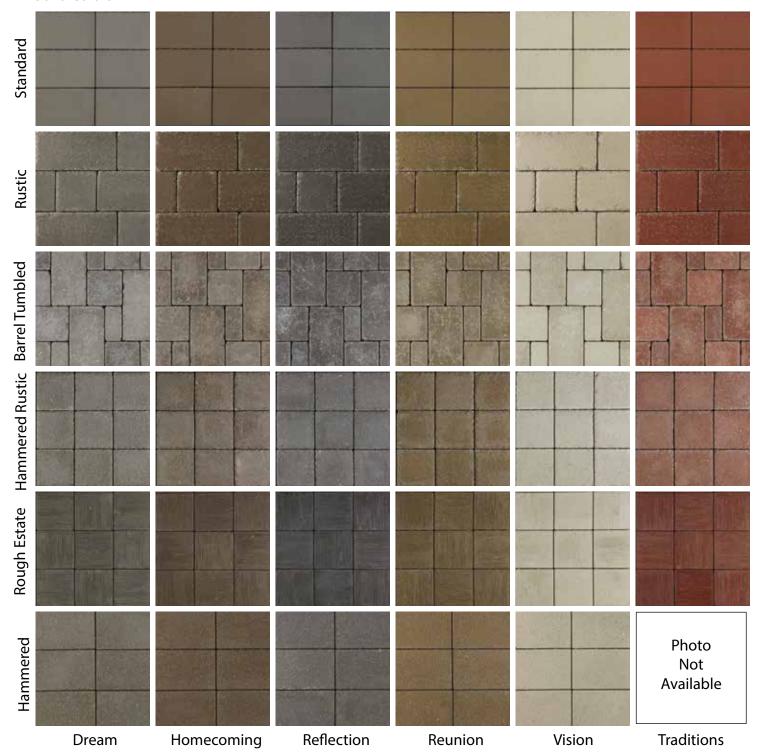


- Standard Colors are available in all 6 sizes.
- Rustic Colors are manufactured On Demand and available in all 6 sizes.
- Barrel Tumbled Colors are manufactured On Demand and available in 4 "x 8", 8" x 8" and 8" x 16"
- Hammered Colors are manufactured On Demand and available in all 6 sizes.
- Hammered Rustic Colors are manufactured On Demand and available in all 6 sizes.
- Rough Estate Colors are manufactured by Special Order and available in all 6 sizes.









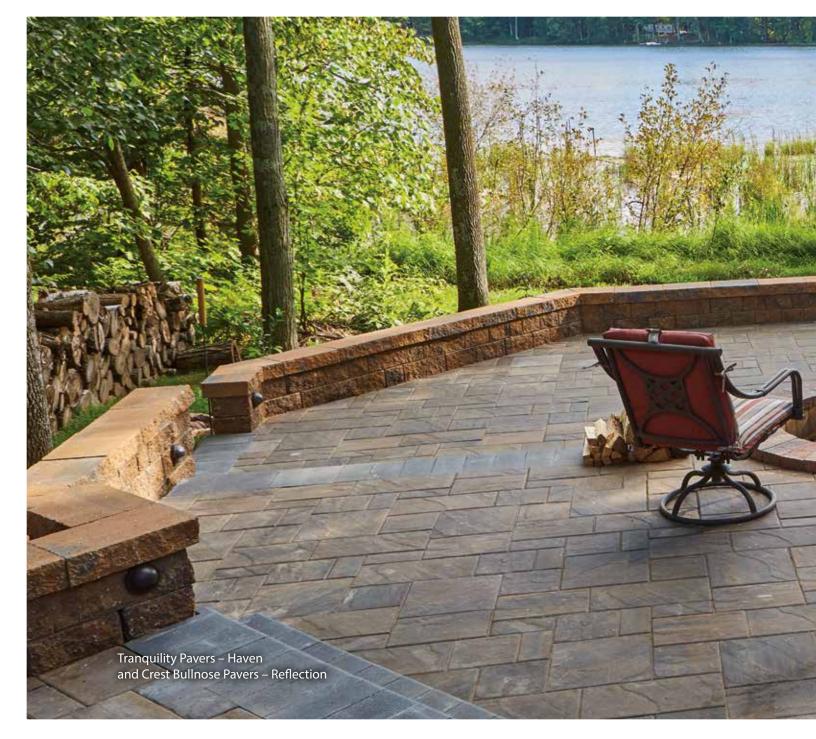

Tranquility® Pavers

Featuring a subtle, textured surface, Tranquility Pavers embody a contemporary aesthetic reminiscent of cut mosaic tile or slate.





Tranquility® Pavers' clean lines create a crisp finished look. Tranquility Pavers are a perfect choice for any outdoor application, from high-energy gatherings to calm and restful retreats. Rich color blends, a textured nonslip surface and abrasion resistance further enhances Tranquility Pavers' understated beauty and quality.

Sizes & Patterns Tranquility Pavers

D x H x L (Nominal Size) Inches • Millimeters




 $9\frac{1}{4} \times 2\frac{3}{4} \times 4\frac{5}{8} \cdot 235 \times 70 \times 117$




 $9\frac{1}{4} \times 2\frac{3}{4} \times 9\frac{1}{4}$ • $235 \times 70 \times 235$



 $14 \times 2\frac{3}{4} \times 9\frac{1}{4}$ • $356 \times 70 \times 248$




114 x 234 x 14 · 356 x 70 x 356




SF/Layer	Layers/Pallet	SF/Pallet	Lbs./Pallet
10.77	8	86.16	2750

Tranquility Pavers Layer Pattern




Note: Textured paver and patio stone surfaces require a buffer between the plate compactor and the paver surface to prevent scuffing. Refer to County Materials' Interlocking Concrete Paver or Slab Installation Guidelines, or contact County Materials for information.

Tranquility Pavers Installation Patterns



A, B, C, D & E Units A-7% B-23% C-19% D-27% E-24%



A, B, C, D & E Units A-7% B-23% C-19% D-27% E-24%



Color Options Tranquility Pavers

Blended Colors




• Rustic Colors are manufactured On Demand.










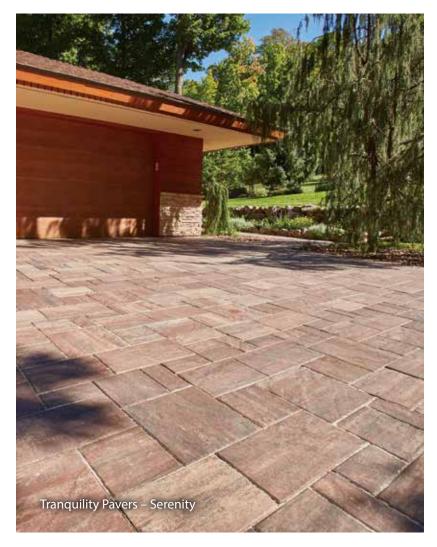


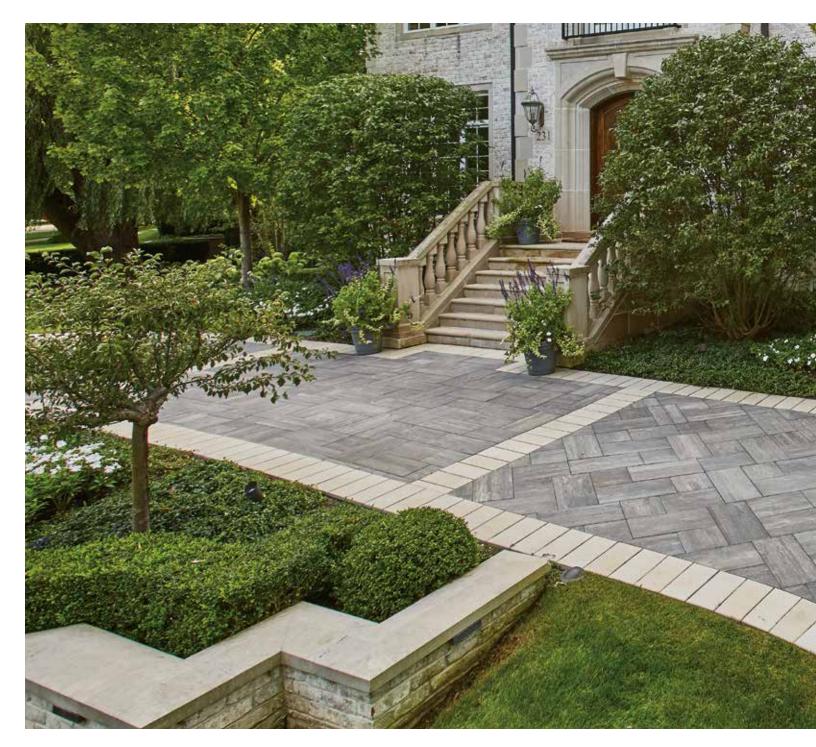

Grand Milestone® Pavers

The scale and stunning color blends available in Grand Milestone Pavers will have you rethinking traditional concrete pavers.



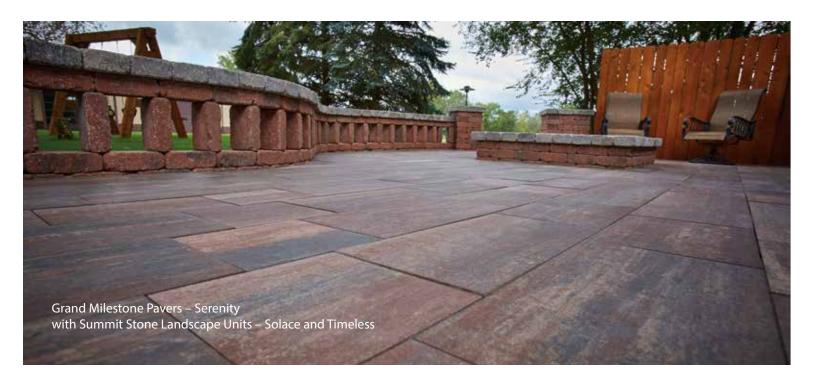


Grand Milestone® Pavers make a simple yet bold statement with grand proportions. Their larger dimensions suit expansive driveway and courtyard applications and add vibrancy to quaint outdoor kitchens.

Use the three lengths of Grand Milestone Pavers on their own for a contemporary presence in residential and commercial applications, or integrate them together with the 10 sizes of smaller scale Milestone Pavers for a cohesive and distinctive effect.


Sizes & Patterns Grand Milestone Pavers

D x H x L (Nominal Size)
Inches • Millimeters



Note: Textured paver and patio stone surfaces require a buffer between the plate compactor and the paver surface to prevent scuffing. Refer to County Materials' Interlocking Concrete Paver or Slab Installation Guidelines, or contact County Materials for information.

Grand Milestone Pavers Layer Pattern






Color Options Grand Milestone Pavers



[•] Rustic Colors are manufactured On Demand.

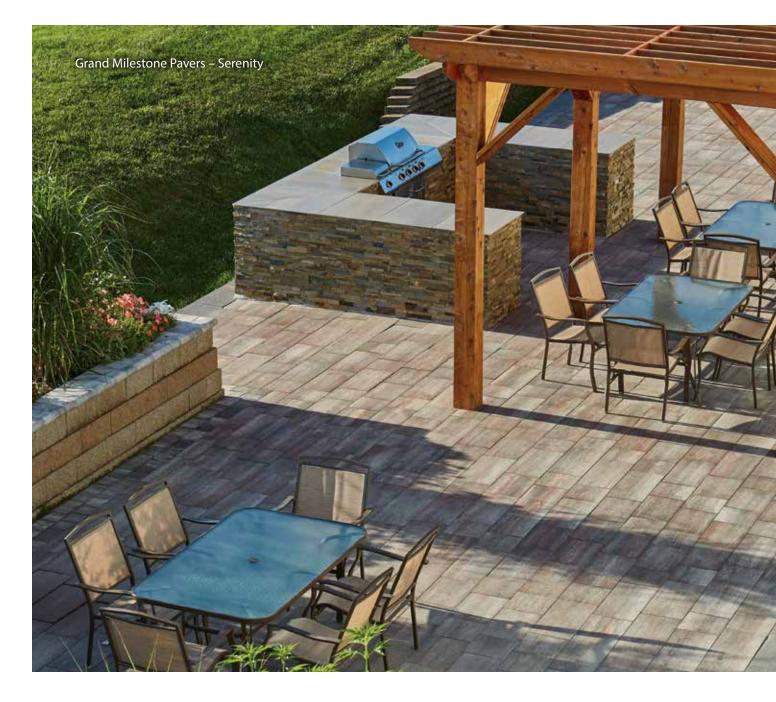










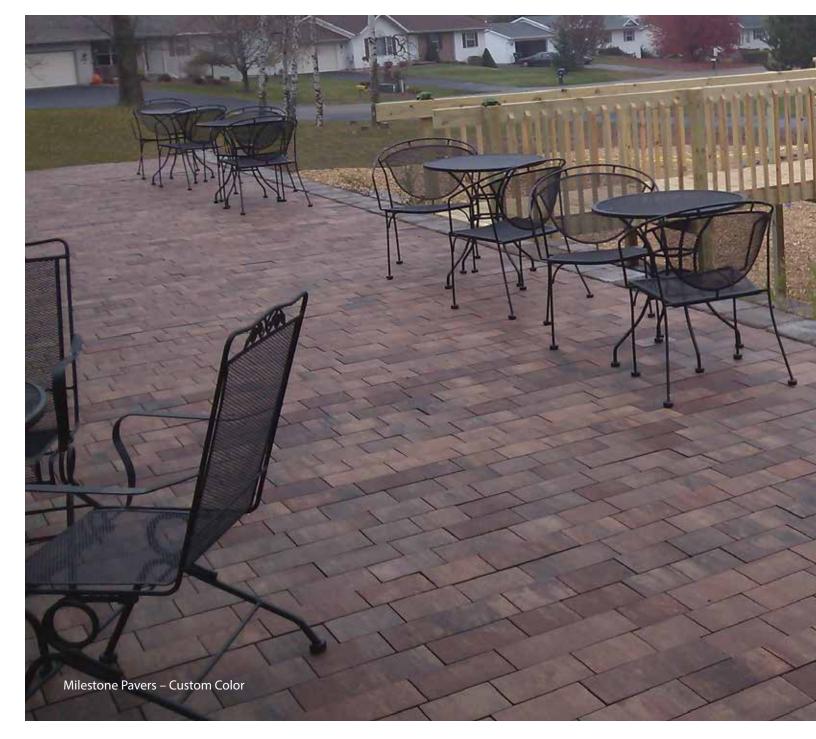

Milestone® Pavers


Milestone Pavers offer the highest quality, lasting performance and best-in-class beauty.





Milestone® Pavers are manufactured in 10 units of varying lengths. Milestone Pavers can be integrated seamlessly with Grand Milestone Pavers to give larger scale projects stunning dimension and interest. Milestone Pavers will inspire for countless years and many memories to come.

Sizes Milestone Pavers

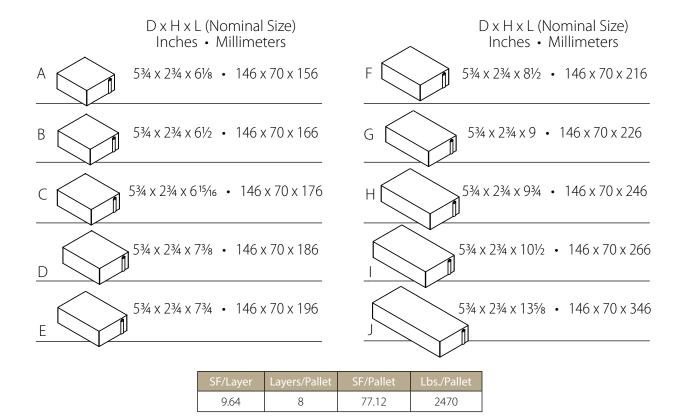

Layer Pattern Milestone Pavers

Milestone Pavers Layer Pattern



Note: Textured paver and patio stone surfaces require a buffer between the plate compactor and the paver surface to prevent scuffing. Refer to County Materials' Interlocking Concrete Paver or Slab Installation Guidelines, or contact County Materials for information.

Color Options Milestone Pavers

Blended Colors




• Milestone Pavers are available by Special Order.



Destination® Pavers

The organic appearance of Destination Pavers simulates flagstone aesthetics at its finest.

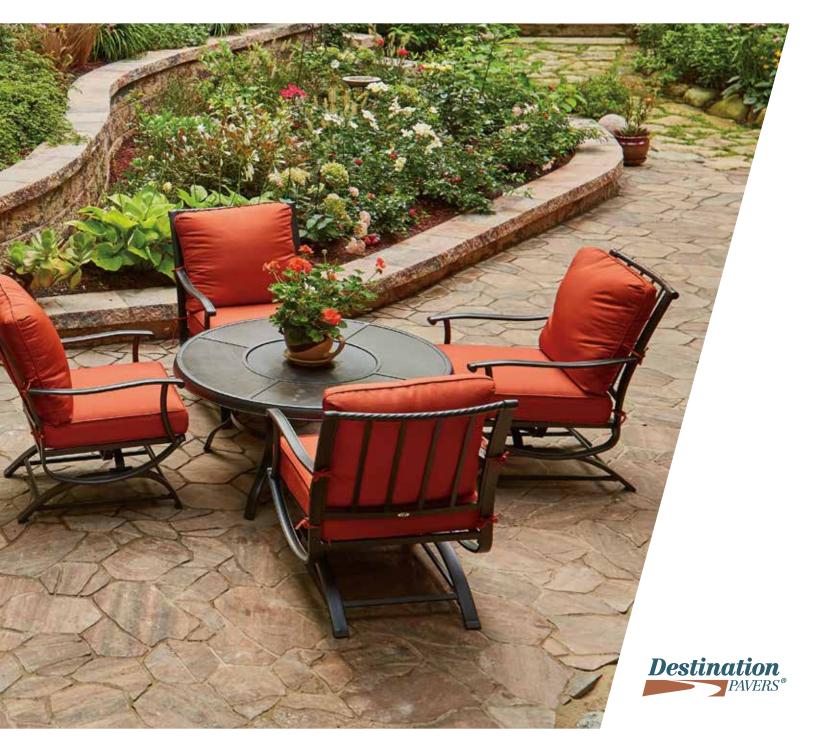




Destination® Pavers offer carefully crafted proportions and dimensions with nine sizes that fit together seamlessly and afford unlimited design freedom; you aren't restricted to follow a set pattern. Its tailored versatility also allows for simple combinations that blend well with other paver accents to become the quintessential focal point of any property.

Sizes Destination Pavers

D x H x L (Nominal Size) Inches • Millimeters


31/8 H • 80H (D & L Vary)



SF/Layer	Layers/Pallet	SF/Pallet	Lbs./Pallet
11.11	8	88.88	2970


Layer & Installation Patterns Destination Pavers


Destination Pavers Layer Pattern




Note: Textured paver and patio stone surfaces require a buffer between the plate compactor and the paver surface to prevent scuffing. Refer to County Materials' Interlocking Concrete Paver or Slab Installation Guidelines, or contact County Materials for information.

Destination Pavers Installation Patterns





Destination Pavers Sidewalk Installation Pattern



* Approximately 57.5" in width


Color Options Destination Pavers

Blended Colors





Haven



Oasis




Serenity



Timeless



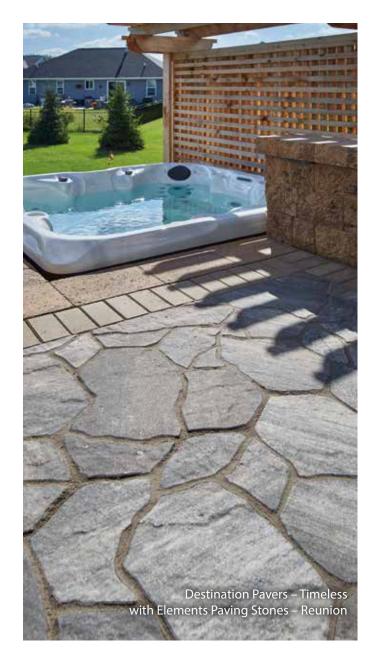










Lifestyle® Pavers Grand Lifestyle® Pavers

Lifestyle and Grand Lifestyle Pavers offer the best of both worlds by marrying high strength concrete with the character and beauty of natural flagstone.

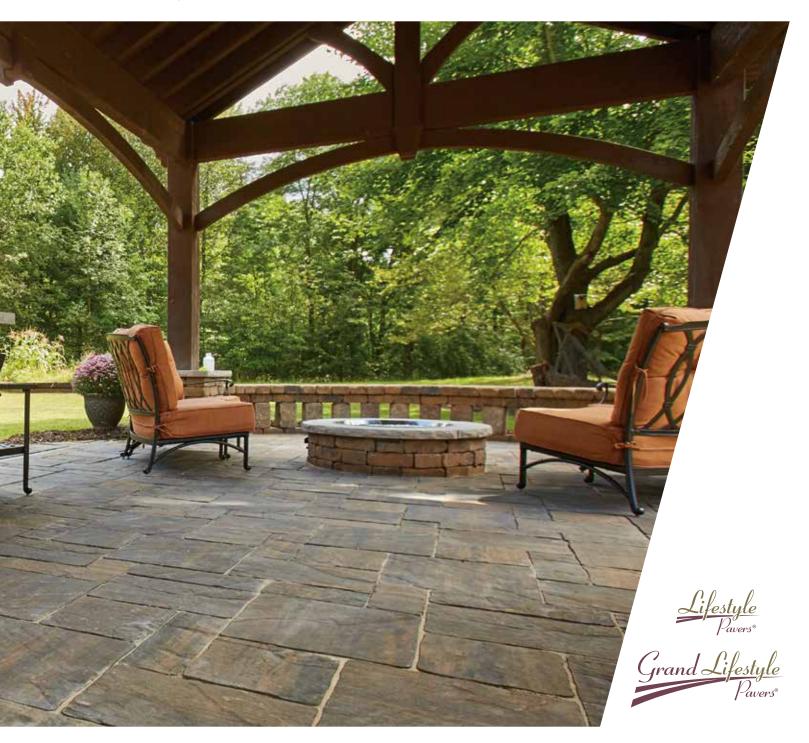



Lifestyle® Pavers and Grand Lifestyle® Pavers are crafted to deliver superior performance and lasting durability that withstands the tests of time. Their texture-rich surface and contoured sides are reminiscent of ancient European alleyways and corridors. Rotate the direction of Lifestyle and Grand Lifestyle Pavers during installation to create inviting, natural looking spaces.



Sizes Lifestyle Pavers and Grand Lifestyle Pavers

Lifestyle Pavers

D x H x L (Nominal Size)
Inches • Millimeters



 $5^{15/16} \times 2^{3/4} \times 2^{15/16} \cdot 153 \times 70 \times 76$




 $5^{15/16} \times 2^{3/4} \times 8^{7/8} \cdot 153 \times 70 \times 228$



 $8\frac{7}{8} \times 2\frac{3}{4} \times 8\frac{7}{8}$ • $228 \times 70 \times 228$



 $8\% \times 2\% \times 11\%6 \cdot 228 \times 70 \times 307$




SF/Layer	Layers/Pallet	SF/Pallet	Lbs./Pallet
11	8	88	2760

Grand Lifestyle Pavers

D x H x L (Nominal Size) Inches • Millimeters


 $5^{15}/_{16} \times 2^{3}/_{4} \times 11^{15}/_{16} \cdot 153 \times 70 \times 307$



 $5^{15}/_{16} \times 2^{3}/_{4} \times 17^{15}/_{16} \cdot 153 \times 70 \times 461$



 $11^{15}/_{16} \times 2^{3}/_{4} \times 11^{15}/_{16}$ • $307 \times 70 \times 307$



 $11^{15}/_{16} \times 2^{3}/_{4} \times 17^{15}/_{16} \cdot 307 \times 70 \times 461$


 $17^{15}/_{16} \times 2^{3}/_{4} \times 17^{15}/_{16} \cdot 461 \times 70 \times 461$

SF/aver La


SF/Layer	Layers/Pallet	SF/Pallet	Lbs./Pallet
12.33	8	98.64	3145

Patterns Lifestyle Pavers and Grand Lifestyle Pavers

Lifestyle Pavers Layer Pattern




Grand Lifestyle Pavers Layer Pattern




Note: Textured paver and patio stone surfaces require a buffer between the plate compactor and the paver surface to prevent scuffing. Refer to County Materials' Interlocking Concrete Paver or Slab Installation Guidelines, or contact County Materials for information.


Lifestyle Pavers Installation Patterns




A, B, C, D & E Units Random



A, B, C, D & E Units Random Grand Lifestyle Pavers
Installation Pattern



F, G, H, I & J Unit Random Lifestyle/Grand Lifestyle Pavers Installation Pattern



A, B, C, D, E, F, G, H, I & J Units Lifestyle Pavers®-50% Grand Lifestyle Pavers®-50%

Color Options Lifestyle Pavers and Grand Lifestyle Pavers

Blended Colors




• Also available in Rustic Colors manufactured On Demand.







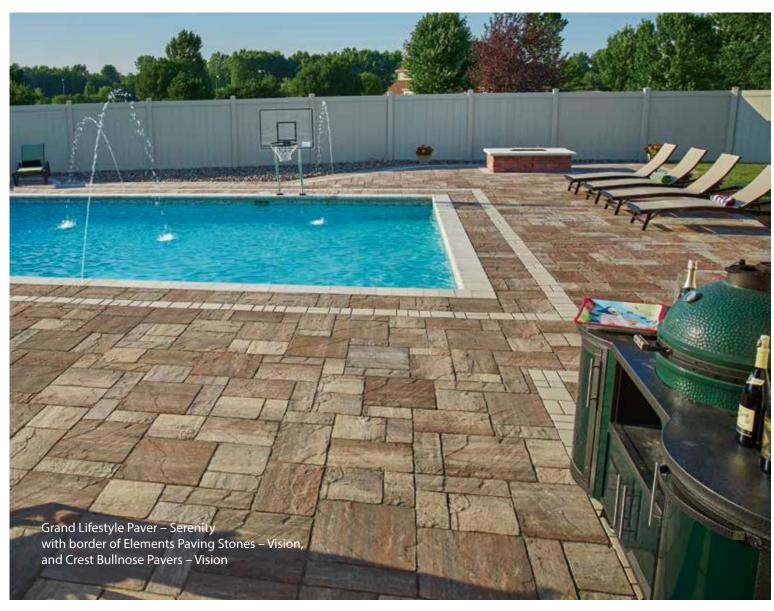



Essence[™] Wood Grain Plank Pavers

Essence Wood Grain Plank Pavers allow you to enjoy the deep rich textures of wood planks with the lasting durability and easy maintenance of concrete.





Essence™ Wood Grain Plank Pavers offer the unmatched durability of concrete with authentic looking grain and textures found in weathered wood, but without the maintenance requirements of typical wood products. Deep splits and detailed graining is featured on their surface. Five different plank lengths facilitate a linear laying pattern and create a dramatic effect.

Sizes & Patterns Essence Wood Grain Plank Pavers

DxHxL(Nominal Size)

Inches • Millimeters

A 53/4 x 31/8 x 911/16 • 146 x 80 x 246

B 53/4 x 31/8 x 115/8 • 146 x 80 x 296


C 53/4 x 31/8 x 135/8 • 146 x 80 x 346

53/4 x 31/8 x 171/2 • 146 x 80 x 446

D 53/4 x 31/8 x 191/2 • 146 x 80 x 496

SF/Layer	Layers/Pallet	SF/Pallet	Lbs./Pallet
10.74	8	85.92	3210

Essence Wood Grain Plank Pavers Layer Pattern




Note: Textured paver and patio stone surfaces require a buffer between the plate compactor and the paver surface to prevent scuffing. Refer to County Materials' Interlocking Concrete Paver or Slab Installation Guidelines, or contact County Materials for information.

Color Options Essence Wood Grain Plank Pavers





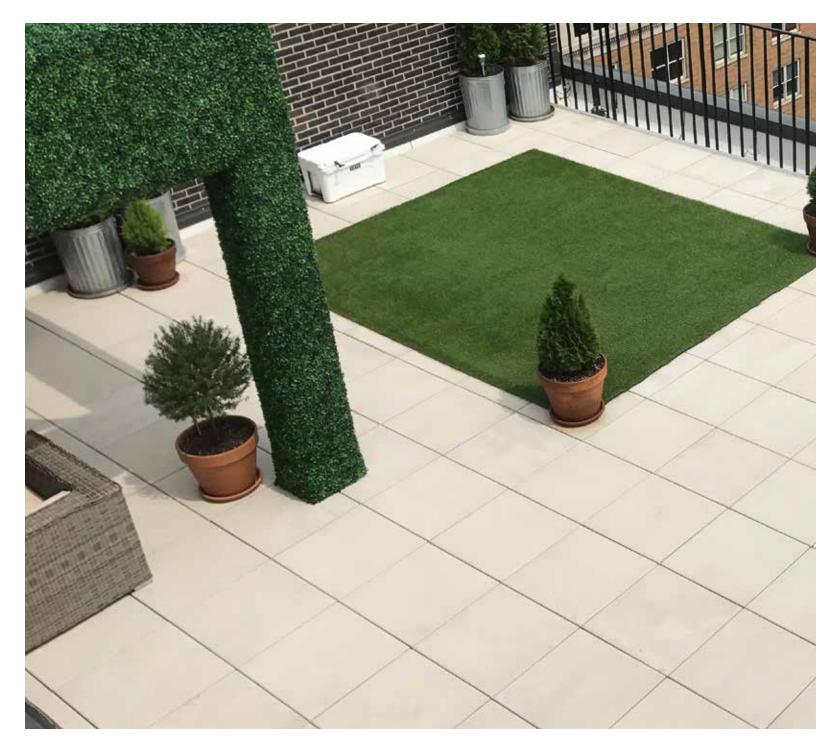

Skylands[™] Concrete Deck Pavers

Raise the status of your roof or patio area with Skylands Concrete Deck Pavers. Adjustable pedestals allow for easy installation and can turn pitched roofs into a flat usable surface.






Skylands™ Concrete Deck Pavers are lighter than the industry average; the 24″ x 2″ x 24″ (nominal size) slabs are 24 lbs/sq. ft. Building owners are turning to concrete deck pavers for enhancing previously unusable spaces because of their many advantages:

- Prevents water damage with open joints
- Lengthens roof membrane lifespan by stopping harmful UV rays
- Seamlessly integrates with green roof features
- Roof components below slabs are easily accessible



Sizes & Patterns Skylands Concrete Deck Pavers



D x H x L (Nominal Size) Inches • Millimeters

 $23\% \times 2 \times 23\% \cdot 594 \times 51 \times 594$


SF/Unit	Units/SF	SF/Pallet	Units/ Pallet	Lbs/Pallet
4	.25	92	23	2258

For on grade applications


Note: Textured paver and patio stone surfaces require a buffer between the plate compactor and the paver surface to prevent scuffing. Refer to County Materials' Interlocking Concrete Paver or Slab Installation Guidelines, or contact County Materials for information.




Installation Layout Skylands Concrete Deck Pavers

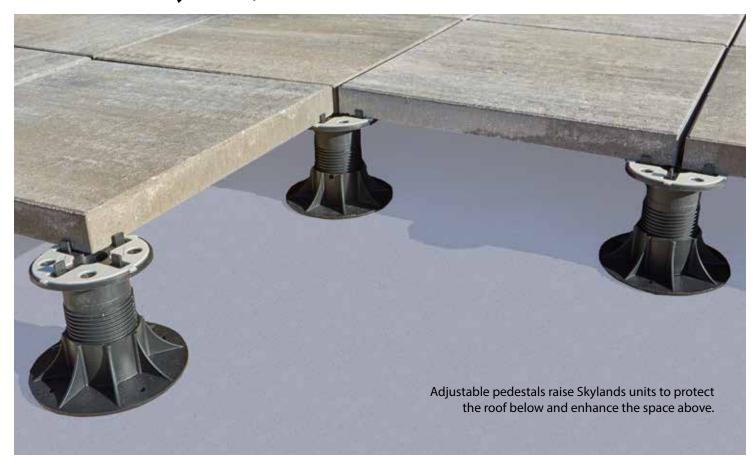


Skylands Concrete Deck Pavers Installation Layout



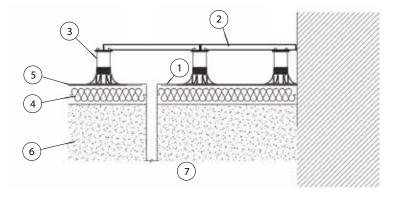

- 1 Roof Drain
- 2 Slab
- 3 Adjustable Paving Support
- 4 Waterproofing Membrane
- 5-Thermal Isolation
- 6 Concrete Slab
- 7 Pipes

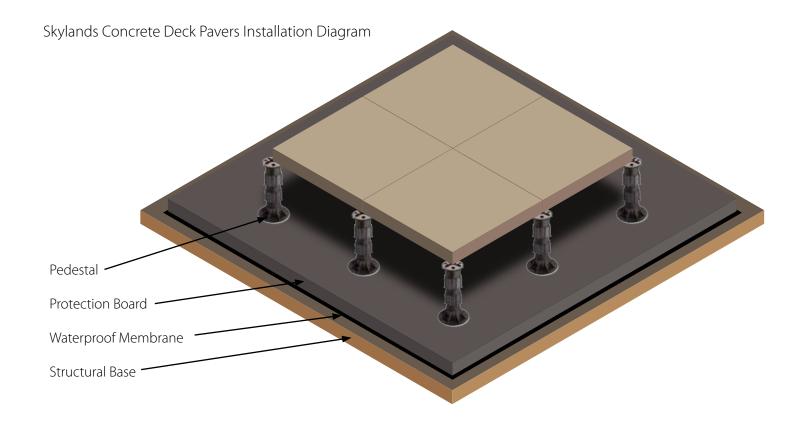


Skylands Concrete Deck Pavers Installation Process



Determine pedestal height, layout and grid



Use level during installation process for precision

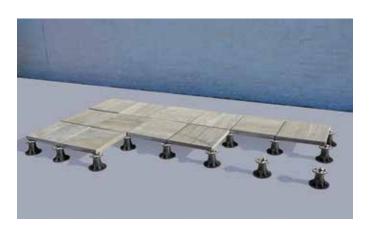

Lay pavers 24" on center



Easy adjustment with pavers in place


Color Options Skylands Concrete Deck Pavers

Blended Colors




• Also available in Rustic and Hammered Colors manufactured On Demand.



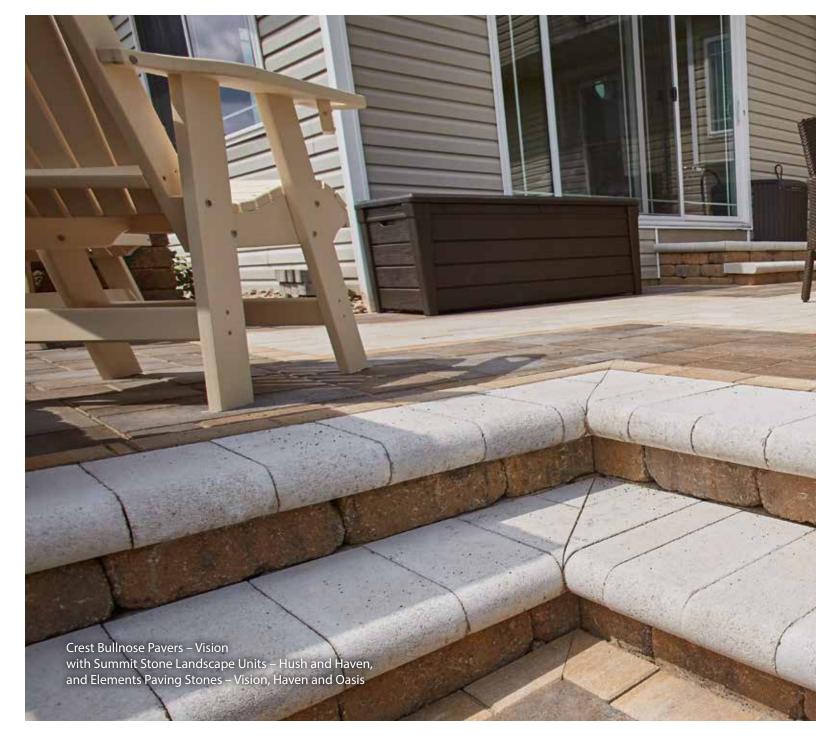

Crest[™] Bullnose Pavers


Crest Bullnose Pavers are the absolute finishing touch to landscaping spaces. Manufactured with a smooth rounded front edge, they are a solution for enhancing any exposed edge.

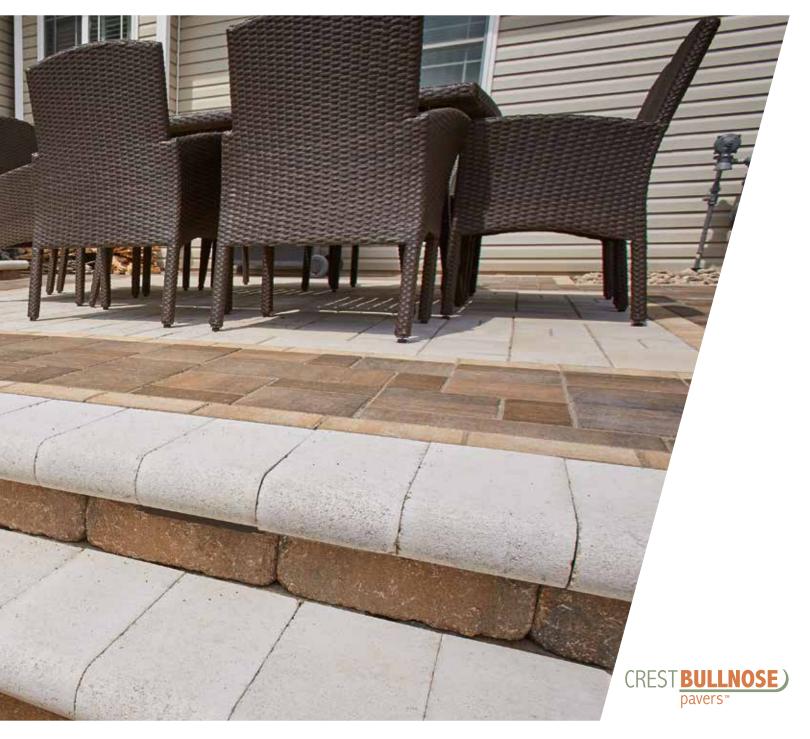



Crest™ Bullnose Pavers can be used to finish steps, pillars, walls, and pool copings; their applications are endless. Crest Bullnose Pavers also meet concrete paver specifications and can be used as accents in driveway and walkway applications. Crest Bullnose Pavers compliment County Materials' collection of pavers and wall products.

Size Crest Bullnose Pavers



 SF/Unit
 Units/SF
 Lbs./Unit
 Units/Cube
 Lbs./Cube

 .5
 2
 13.86
 280
 3931

Note: Textured paver and patio stone surfaces require a buffer between the plate compactor and the paver surface to prevent scuffing. Refer to County Materials' Interlocking Concrete Paver or Slab Installation Guidelines, or contact County Materials for information.

Color Options Crest Bullnose Pavers



















Permeable Interlocking Concrete Pavers

Permeable concrete pavers are the ideal solution for storm water management.


Permeable concrete pavers are designed to allow storm water to pass through paver joints directly into the ground, the use of permeable concrete pavers is proven and widely recognized by many municipalities, state agencies, shoreland and watershed districts for meeting EPA-mandated standards.

Permeable concrete paver systems help to improve water quality by capturing contaminants and suspended solids in storm water and filtering them through layers of aggregates. This also reduces the risk and severity of flooding, eliminates surface puddling and reduces the time for snow and ice removal by speeding up the melting process. Additionally, where space is at a premium, permeable concrete pavers

help to maximize land use on the total building site for residential and commercial applications, typically replacing traditional retention and detention ponds.

Top 5 Reasons for Choosing Permeable Concrete Payers

- 1. Increased profits: Gain a developable lot.
- **2.** Reduction in risk associated with ponds (accidents, injuries, pests etc.).
- **3.** Reduction in risk associated with freeze-thaw/standing water.
- **4.** Increased curb appeal: Added aesthetic value.
- **5.** Lower maintenance costs than traditional pavement.

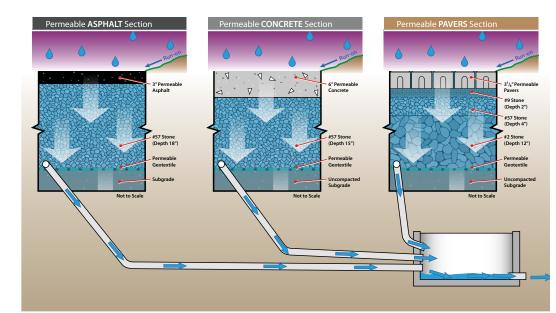

County Materials is leading the industry in our commitment to storm water management by collaborating on a permeable paver test plot project in Madison, Wisconsin with the Wisconsin Department of Natural Resources and the Wisconsin Department of Transportation. Faciliated by the USGS, the test plot will enable researchers to accurately assess the effectiveness of permeable pavers in diverting and filtering storm water runoff. Learn more about this test plot

and other case studies by visiting www.countymaterials.com



H₂O Pro® Pavers

Permeable Paving Units

 $\rm H_2O$ Pro Pavers are manufactured in three dimensionally compatible sizes with hidden spacers.








H₂O Pro® Pavers accommodate high pedestrian areas and wheelchair traffic, making them a suitable option for entrances, walkways and retail courtyards. Their 3¹/₈" (80 mm) thickness also withstands heavy low speed vehicular loads.

Sizes & Patterns H₂O Pro Pavers


	D x H x L (Nominal Size) Inches • Millimeters	SF/Unit	Units/ SF	SF/ Layer	Layers/ Pallet	SF/ Pallet	Units/ Layer	Units/ Pallet	Lbs/ Pallet
A	4 x 3% x 8 • 102 x 80 x 203	.22	4.5	11	8	88	50	400	3085
В	8 x 3 % x 8 • 203 x 80 x 203	.44	2.25	13.2	8	105.6	30	240	3695
	8 x 3 % x 16 · 203 x 80 x 406	.89	1.13	13.2	8	105.6	15	120	3820

- Installed joint dimensions = $10 \,\mathrm{mm} \,(^{25}\!/_{64}")$
- Installed open area/layer $= \pm 9.1\%$ (depending on pattern)


H₃O Pro Pavers Permeable Layer Patterns




Note: The 4" x 8" size of H₂O Pro Pavers are manufactured in a herringbone layer pattern that easily accommodates mechanical installation. Units can also be installed in many different patterns by hand.




Note: 4" x "4 fillers (see black squares in illustration for layer pattern "A") are used to keep the integrity of a layer when placed by a machine. They are provided at no charge and not sold separately. If 4" x 4" fillers are used in a pattern and more are needed, installers can cut 4" x 8" pavers in half and install where needed.



Installation Patterns H₂O Pro Pavers

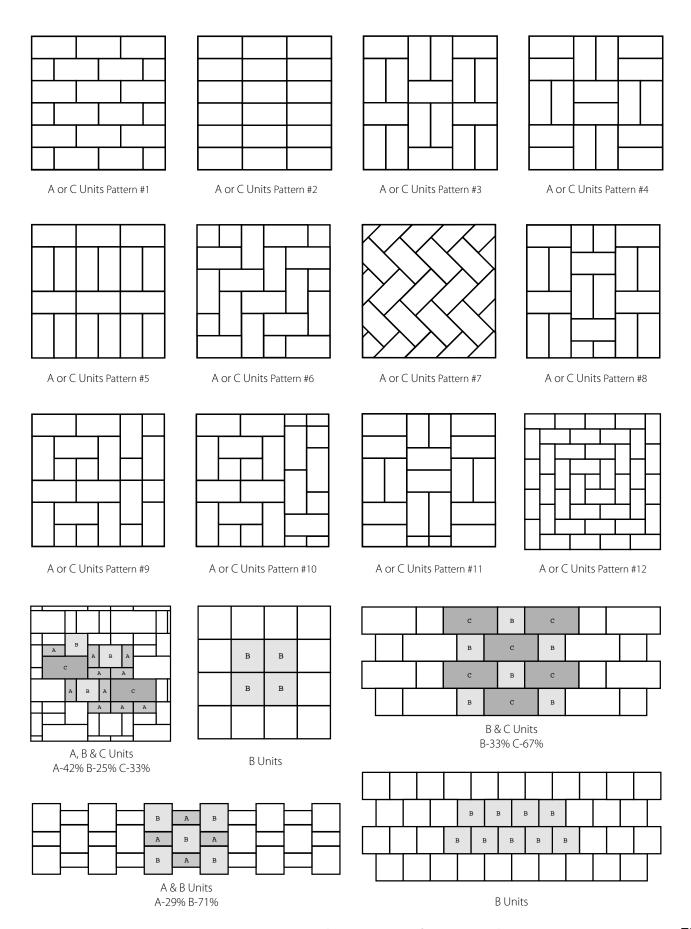

Color Options H₂O Pro Pavers

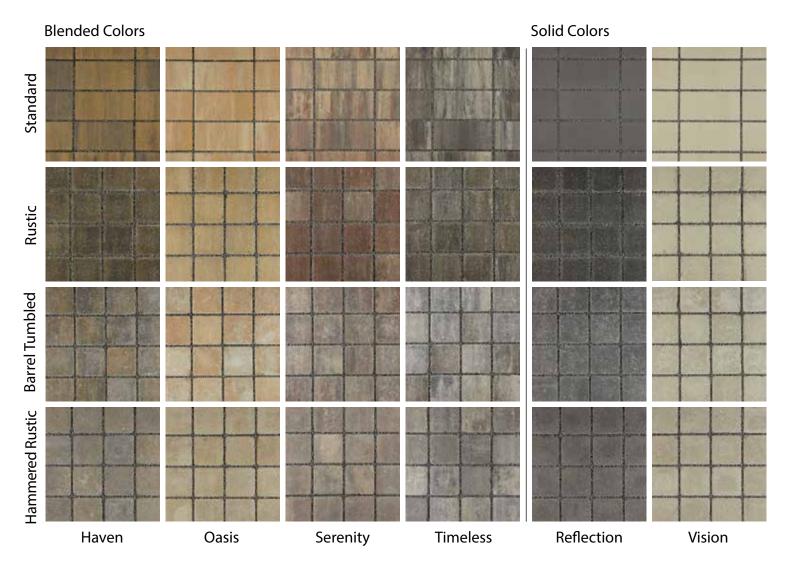


- Rustic, Barrel Tumbled and Hammered Rustic Colors are manufactured On Demand.
- Also available in Rough Estate by Special Order.










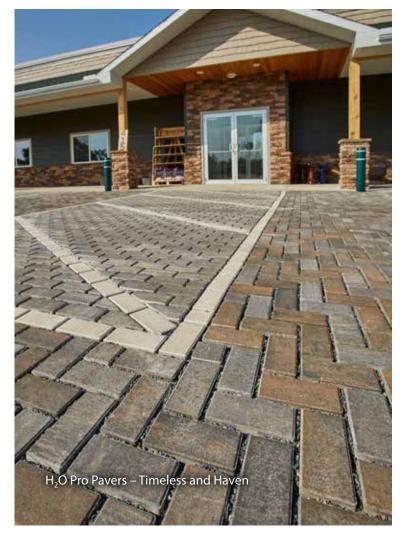

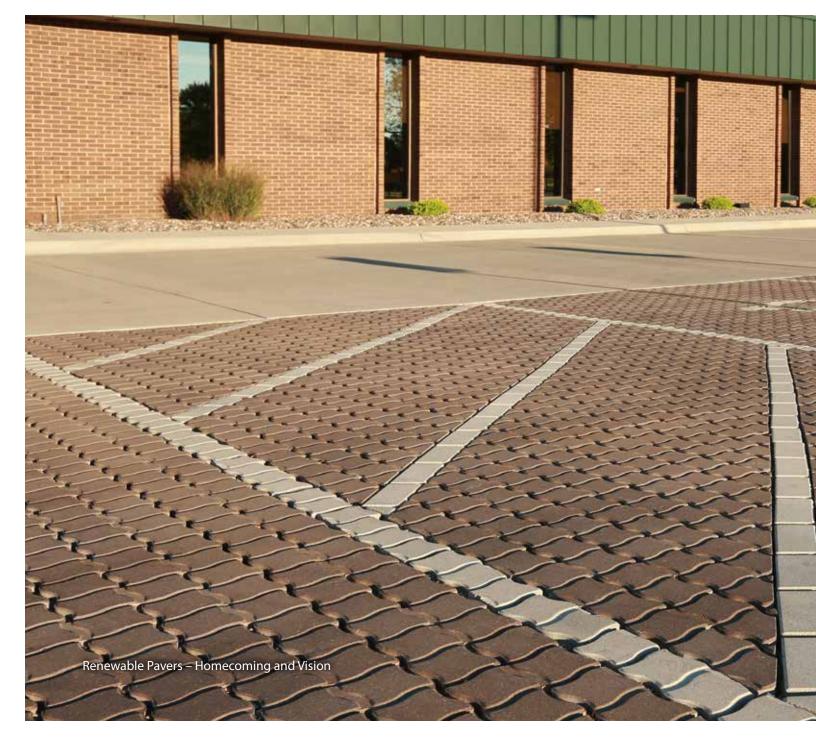

Renewable[™] Pavers

Permeable & Sandset Pavers

Renewable Pavers combine the integrity of an interlocking paver with the advantages of a permeable concrete paver system.





Renewable™ Pavers' larger joints accommodate drainage aggregates and units have hidden tabs. Renewable Pavers can also be manufactured as sandset units with smaller hidden tabs that hold jointing sand for non-permeable surfaces.

Sizes & Patterns Renewable Pavers




D x H x L (Nominal Size)
Inches • Millimeters

Permeable

85/8 x 31/8 x 85/8 • 219 x 80 x 219

SF/ Unit	Units/ SF	SF/ Layer	Layers/ Pallet		Units/ Layer	Units/ Pallet	Lbs/ Pallet
.4	2.5	10	8	80	25	200	2850

Renewable Pavers Permeable Layer Pattern



- Installed joint dimensions (Permeable) = $10 \text{ mm} (^{25}\!/_{64}")$
- Installed open area/layer = $\pm 7.1\%$




Sandset

 $85\% \times 31\% \times 85\% \cdot 219 \times 80 \times 219$


SF/	Units/	SF/	Layers/	SF/	Units/	Units/	Lbs/
Unit	SF	Layer	Pallet	Pallet	Layer	Pallet	Pallet
.4	2.5	10	8	80	25	200	

Renewable Pavers Sandset Layer Pattern



Installed joint dimensions
 (non-permeable or sandset) = 2mm (1/16")

Note: Textured paver and patio stone surfaces require a buffer between the plate compactor and the paver surface to prevent scuffing. Refer to County Materials' Interlocking Concrete Paver or Slab Installation Guidelines, or contact County Materials for information.

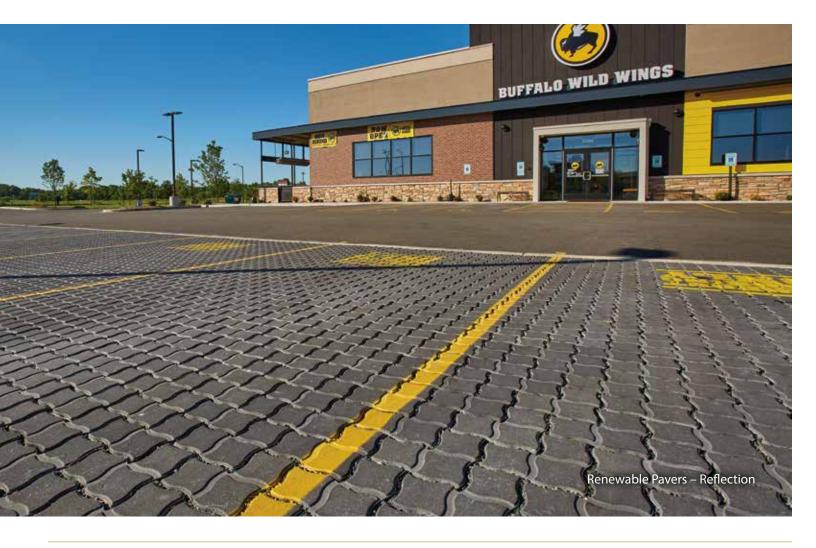

Color Options Renewable Pavers





- $\bullet \, \text{All Renewable Pavers Standard Colors are manufactured by Special Order.} \\$
- Also available in Rough Estate by Special Order.



Harmony[™] Permeable Pavers

Harmony Permeable Pavers are designed with maximum performance in mind.





Harmony™ Permeable Pavers wider joint dimensions, made possible with a larger lug, allow more water to filter through and ensure that Harmony Pavers function as part of an effective storm water management system, even in the heaviest rain events.

Sizes Harmony Permeable Pavers

D x H x L (Nominal Size)
Inches • Millimeters



 $4 \times 3\% \times 8 \cdot 102 \times 80 \times 203$



 $4 \times 3\% \times 8 \cdot 102 \times 80 \times 203$



 $8 \times 3\% \times 8 \cdot 203 \times 80 \times 203$



8 x 3 % x 12 • 203 x 80 x 305



 $8 \times 3\% \times 12 \cdot 203 \times 80 \times 305$


SF/Layer Layers/Pallet		SF/Pallet	Lbs./Pallet	
11.51	8	92.08	3370	

Note: Textured paver and patio stone surfaces require a buffer between the plate compactor and the paver surface to prevent scuffing. Refer to County Materials' Interlocking Concrete Paver or Slab Installation Guidelines, or contact County Materials for information.




Layer & Installation Patterns Harmony Permeable Pavers

Harmony Permeable Pavers Layer Pattern

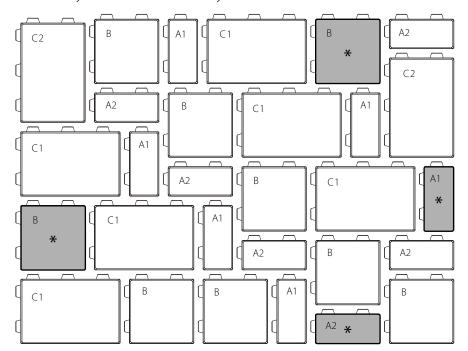

Harmony Permeable Pavers Installation Pattern



- Installed joint dimensions = 15mm (19/32")
- Installed open area/layer = ±10.6%

Note: In machine-laid applications, the shaded pavers shown above are designed to be interchangeable to allow for stitching of the pattern as indicated in the diagram at right. Harmony units are manufactured to create a three piece pattern, mechanically installed by pallet layer. Schematic above illustrates paver sizes/orientation on the layer.


Color Options Harmony Permeable Pavers

Blended Colors






• All Harmony Permeable Pavers Standard Colors are manufactured by Special Order.

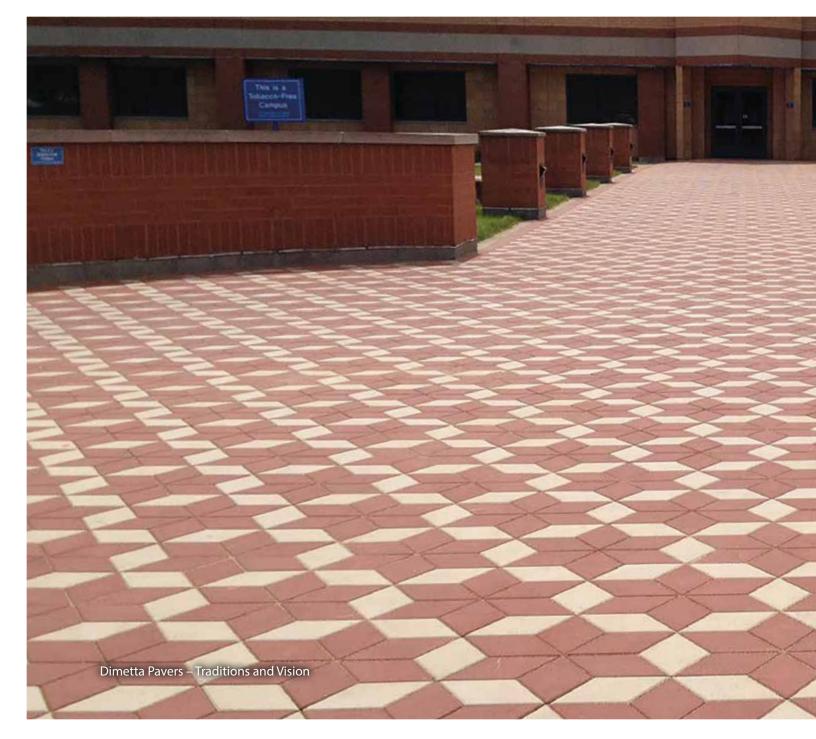


Dimetta® Pavers

For a subtle accent or dramatic one-of-a-kind project, Dimetta Pavers test the limits of design possibilities and visual effects.




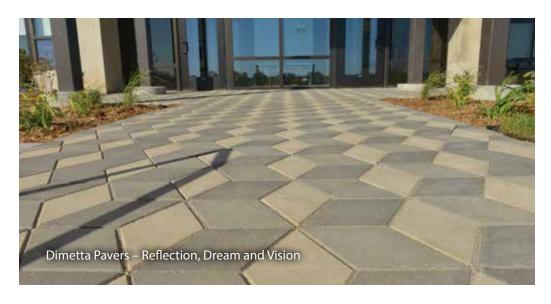



Dimetta® Pavers test the limits of design possibilities and visual effects by using complimentary color combinations, and turning and arranging units to create stunning three-dimensional effects. Or select contrasting colors to create corporate logos, residential monograms, and other unique horizontal elements. Accent small spaces with flair, or create a central focal point in larger driveways, plazas and courtyards. Produced with a 3 ½" thickness, Dimetta Pavers accommodate pedestrian and low speed, vehicular traffic.

Size Dimetta Pavers



D x H x L (Nominal Size)
Inches • Millimeters

 $13 \times 3\% \times 7\%$ • $330 \times 80 \times 197$

SF/Unit	Units/SF	SF/Layer	Layers/ Pallet	SF/Pallet	Units/ Layer	Units/ Pallet	Lbs/ Pallet
.37	2.7	9.25	8	74	25	200	2700


Color Options Dimetta Pavers

Solid Colors

Standard










Traditions



• Standard Colors are manufactured by Special Order.

Layer & Installation Patterns Dimetta Pavers


Dimetta Pavers Layer Pattern





Notes:


- Textured paver and patio stone surfaces require a buffer between the plate compactor and the paver surface to prevent scuffing. Refer to County Materials' Interlocking Concrete Paver or Slab Installation Guidelines, or contact County Materials for information.
- Making (2) cuts from corner to corner on one unit allows for a multitude of additional pattern designs.
- When working around an object (i.e. firepit) make sure to use string lines for proper alignment, keeping joints and tips in line.
- Keep joints snug but not tight- Allow enough room to accommodate slight adjustment in units to keep joints in line, especially when multiple points come together in a pattern.


Dimetta Pavers Installation Patterns










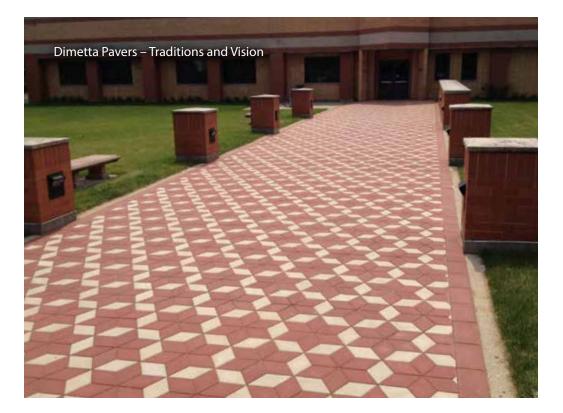



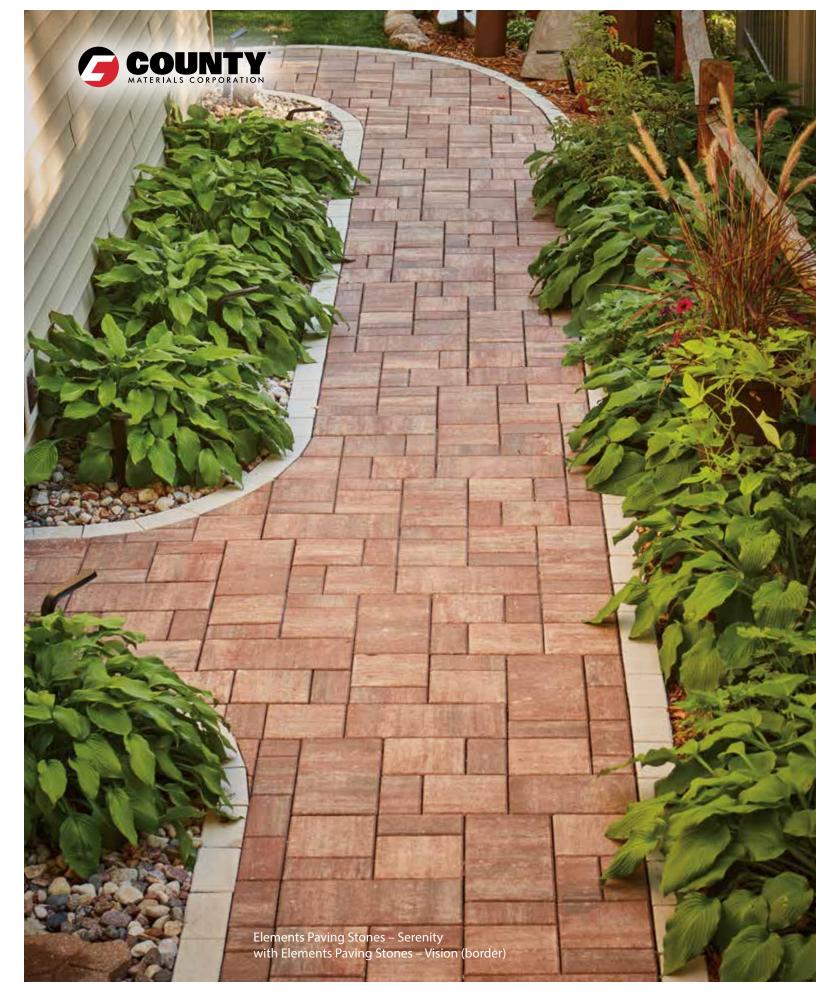


Pavers Borders & Accents


Contrasting paver styles and colors create unique borders and accents, and help to define separate areas or elevation changes near steps.










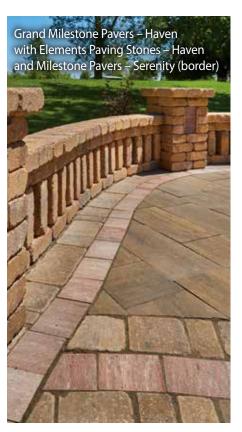

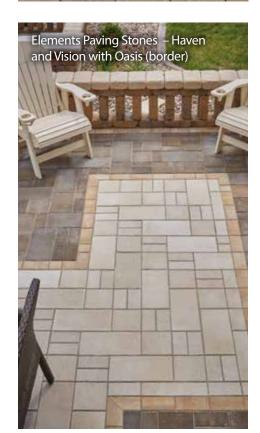












Related Paver Items

Grass Pavers

- Available in Gray
- Manufactured to meet ASTM C1319




D x H x L (Nominal Size)
Inches • Millimeters

 $16 \times 3\% \times 16 \cdot 406 \times 92 \times 406$

SF/	Units/	SF/	Layers/	Units/	Units/	Lbs/	Lbs/
Unit	SF	Layer	Pallet	Layer	Pallet	Unit	Pallet
1.78	.56	10.67	10	6	60	47	2870



Grass Pavers Installation Pattern



Patio Stones – Smooth Round



• Available in Gray, Red and Brown

Diameter x H (Nominal Size) Inches • Millimeters

> 11% x 2 • 295 x 51 18 x 2 • 457 x 51

Size	Units/Pallet	Lbs/Unit	Lbs./Pallet
11 ⁵ / ₈ x 2	216	17	3717
18 x 2	80	41	3243

Patio Stones – Smooth Square



• Available in Gray, Red and Brown

D x H x L (Nominal Size) Inches • Millimeters

 $11\frac{1}{8} \times 2 \times 11\frac{1}{8} \cdot 295 \times 51$ $17\frac{1}{8} \times 2 \times 17\frac{1}{8} \cdot 457 \times 51$

Size	SF/ Unit	SF/ Pallet	Units./ SF	Units/ Pallet	Lbs/ Unit	Lbs/ Pallet
$11^{5}/_{8} \times 2 \times 11^{5}/_{8}$	1.0	144	1.0	144	23	3357
$17^{5}/_{8} \times 2 \times 17^{5}/_{8}$	2.25	162	.44	72	46	3357

Patio Stones – Brick Face



• Available in Gray, Red and Brown

D x H x L (Nominal Size) Inches • Millimeters 175% x 2 x 175% • 457 x 51

Size	SF/ Unit	SF/ Pallet	Units./ SF	Units/ Pallet		Lbs/ Pallet
$17^{5}/_{8} \times 2 \times 17^{5}/_{8}$	2.25	162	.44	72	46	3357

Patio Stones

- Veranda & Courtyard





Veranda

Courtyard

- Veranda Available in Gray and Red
- Courtyard Available in Desert Sand, Iron River and Cedar Blend
- 4 stones make a circle pattern

DxHxL (Nominal Size) Inches • Millimeters 17%x2x17% • 457x51

SF/Unit	SF/Pallet	Units./SF	Units/ Pallet	Lbs/Unit	Lbs/Pallet
2.25	162	.44	72	41	2997

Patio Block

 Available in Gray, Brown, Red and Black



D x H x L (Nominal Size) Inches • Millimeters 7% x 1% x 15% • 194 x 41 x 390

SF/ Unit	SF/ Layer	SF./ Pallet	Layers/ Pallet	Units/ SF		Units/ Pallet		Lbs/ Pallet
.89	13.35	200.25	15	1.13	15	225	15	3420

Bullet Edger

 Available in Gray, Red/Black, Red, Tan/Brown, Brown and Black



DxHxL (Nominal Size) Inches • Millimeters 358 x 3 x 124/ • 92 x 76 x 311

Units/Pallet	Lbs/Unit	Lbs./Pallet
240	12	2930

Paver Sand

Product	Size/CF	Units/Pallet		
SEK Polysweep	50 Lbs.	56		
SEK Polysweep Wide Joint	50 Lbs.	56		

Edging

Product	Description
Landscape Spike	10"
SEK Snap Edge Paver Restraint	8'Long
SEK Low Profile Edge Paver Restraint	6'8"Long
SEK Permeable Paver Restraint	8'Long
Edge Pro Lo-Pro Paver Restraint	7.5'Long
Edge Pro Lawn Edge	20' w/spikes
Edge Pro Stake	100/box
Edge Pro Connector	

Paver Lights

Product	
Paver Lights – 14 Pack	

Product	
LED Solar Paver Lights	

No electrical wiring, transformers, conduit or batteries required.

- Ground Flasher
- Road Marker
- Solar Tile in 3 Sizes
- Surface Mount

Paver Cleaners and Enhancers

Ask a County Materials representative for availability of paver cleaners and enhancers in your market.

Air Conditioner Pads



D x H x L (Nominal Size) Inches • Millimeters


 $30 \times 2 \times 30 \cdot 762 \times 51 \times 762$


 $36 \times 2 \times 24 \cdot 914 \times 51 \times 610$


 $36 \times 2 \times 36 \cdot 914 \times 51 \times 914$

Size	Units/Pallet	Lbs/Unit	Lbs/Pallet
30 x 2 x 30	30 x 2 x 30 10		1585
36 x 2 x 24	10	143	1475
36 x 2 x 36	10	213	2175

Parking Curbs





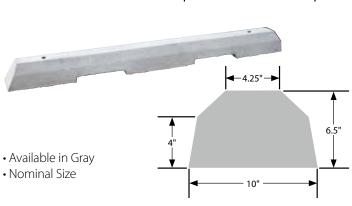

Product	Size	Units/Pallet	Lbs/Unit	Lbs/Pallet
Parking Curb – No Notch	6′	15	274	4110
Parking Curb – Notched	6′	16	276	4416
Parking Curb	7′	16	320	5120
Pins	18"	N/A	N/A	N/A

Pole Pads



Diameter x H (Nominal Size) Inches

Size	Units/ Pallet	Lbs/ Unit	Lbs/ Pallet
12 x 4	108	34	3717
14 x 4	90	46	4185
16 x 6	30	106	3225
20 x 6	20	160	3245
22 x 6	20	195	3945

Size	Units/ Pallet	Lbs/ Unit	Lbs/ Pallet
24 x 6	10	232	2365
24 x 8	8	310	2525
26 x 8	8	366	2973
30 x 8	4	480	1965

Splash Block



- Available in Gray
- Nominal Size

Size Units/Pallet		Lbs/Unit Lbs/Pal				
24"	32	40	1325			
30"	32	45	1485			


Sign Post Bases




Sign post bases are the ideal solution for municipal, commercial & residential needs:

- Street signs
- Handicap signs
- Commercial signage
- Parking signs
- Parking meters
- Metal fencing supports
- Tennis court nets and fencing
- Mailbox posts
- Driveway reflector stakes
- Birdhouse stakes (10' max ht.)
- Clothesline posts

- Available in Gray
- Nominal Size

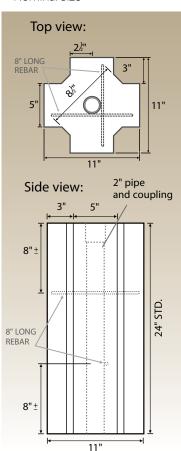

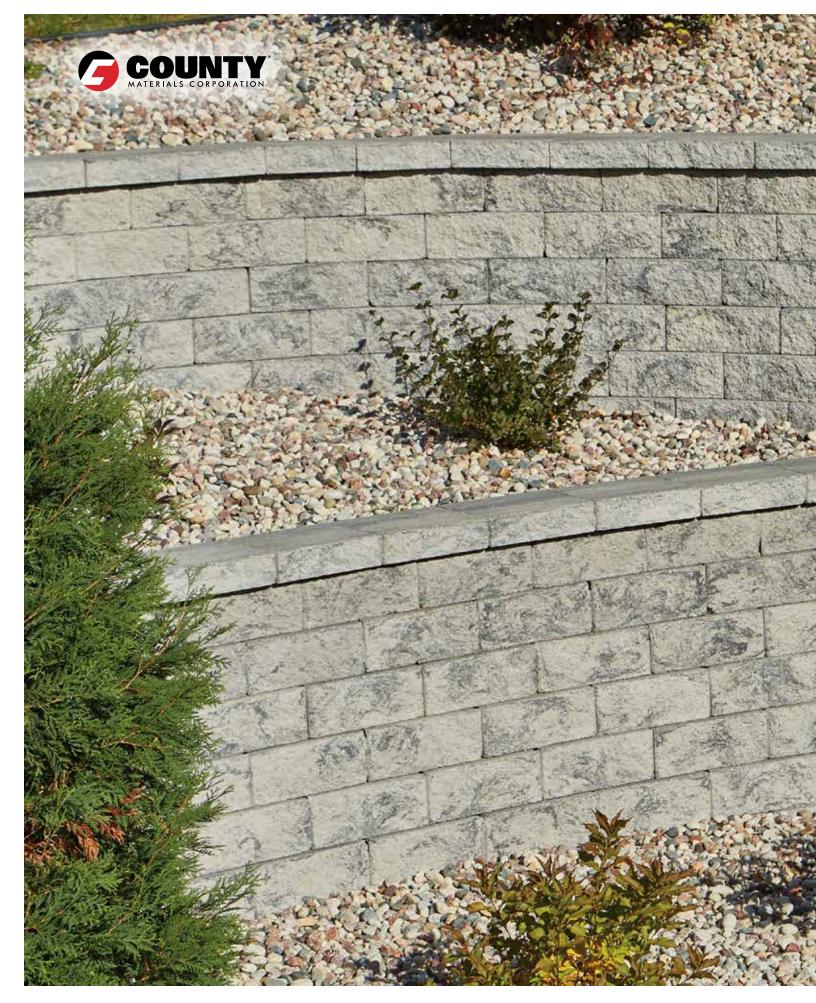




Retaining Walls

- Rib Rock™ Landscape Block
- Tribute® Retaining Wall System
- County Block® Retaining Wall System
- County Cub® Landscape Units
- Winston® Retaining Wall System
- Integrity™ Retaining Wall System
- Terrace Stone® Retaining Wall System
- Navaro® Retaining Wall System
- Landscape Step Unit
- Oversize Landscape Step Unit

Related Retaining Wall Items:

- Landscape Fabric
- Adhesive
- Geogrid
- Wall Caps Splitface
- Wall Caps Rustic
- Bin Block

The color photos shown in this catalog were prepared with careful attention to accuracy. However, colors shown may vary from actual hues and should only be used as a guide. Refer to actual product samples for final color selection. Because concrete units are manufactured with high quality, naturally-mined aggregates and materials, variations in color or shading should be expected in products that are manufactured at different times and in units having different shapes. This color or shading variation is acceptable in the industry.

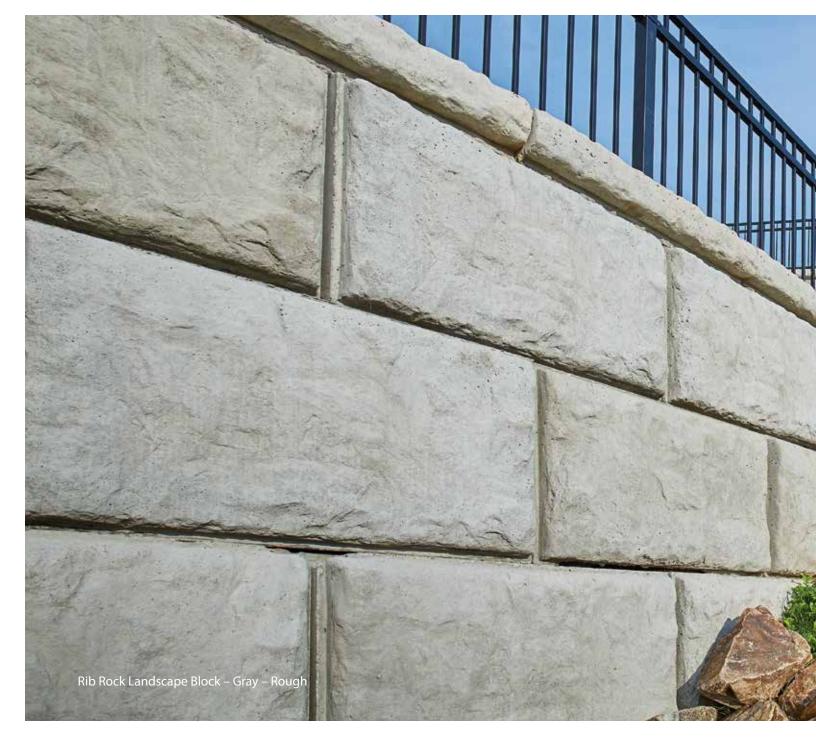

Rib Rock[™] Landscape Block


Engineered for the most challenging applications, Rib Rock Landscape Block effortlessly builds oversize walls. Their large scale and natural aesthetics make a dramatic statement.



Rib Rock™ Landscape Block can easily construct walls from 6 feet to 20 feet high with additional site-specific engineering. Their size speeds up construction allowing for more square footage to be placed at one time, and their interlocking design allows for easy installation and enhanced security. Manufactured to hold back a lot of earth, Rib Rock units are the perfect solution for demanding projects that require lasting strength and enhanced durability.

Shapes & Sizes Rib Rock Landscape Block

Rib Rock units are available in both Dry Stack and Rough textures

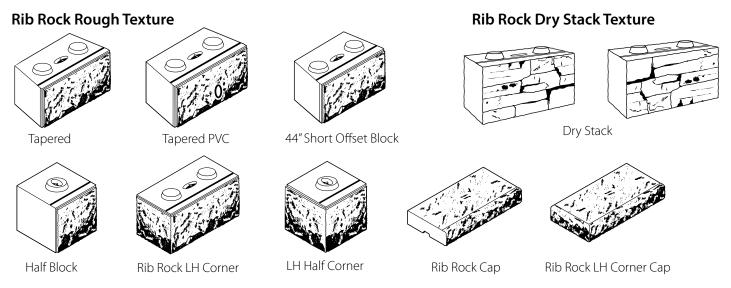

Calculate the number of Rib Rock full and base block units needed: SF divided by 8.

Available in Rough or Dry Stack Textures	D x H x L (Nominal Size) Inches	SF/ Unit	Units/ Pallet	Lbs/ Unit	Lbs/ Pallet
Full Block 24" Flat w/6" PVC	23 x 24 x 48	7.6	2	2000	4045
44" Short Offset Block	23 x 24 x 44	6.96	2	1850	3745
Tapered	23 x 24 x 48	7.6	2	2000	4045
52"Tapered	23 x 24 x 52	8.2	2	2800	5645
Base Block 28" Channel	27 x 24 x 48	9	2	2800	5645
Base Block 28" Smooth	27 x 24 x 48	9	2	2850	5745
1/2 Block	24 x 24 x 24	4	2	960	1965
Half Corner Block Left	24 x 24 x 24	4	2	1380	2805
Half Corner Block Right	24 x 24 x 24	4	2	1380	2805
Full Corner Block Left	27 ¹ / ₂ x 24 x 52	9.92	2	2730	5505
Full Corner Block Right	27 ¹ / ₂ x 24 x 52	9.92	2	2730	5505
Cap Block Straight	25 x 7 x 48	8.33	4	760	3085
Corner Cap Left	25 x 7 x 48	8.33	4	760	3085
Corner Cap Right	25 x 7 x 48	8.33	4	760	3085

Color Options Rib Rock Landscape Block


• Available in Gray as a Standard Color, or custom staining may be done onsite.










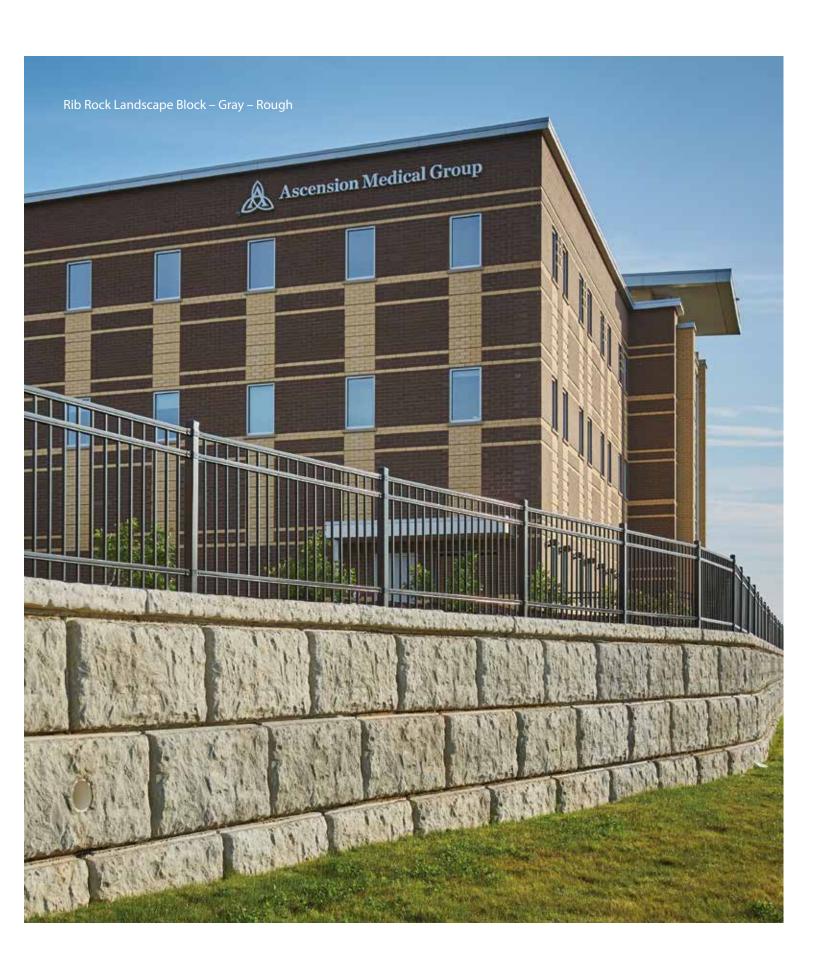




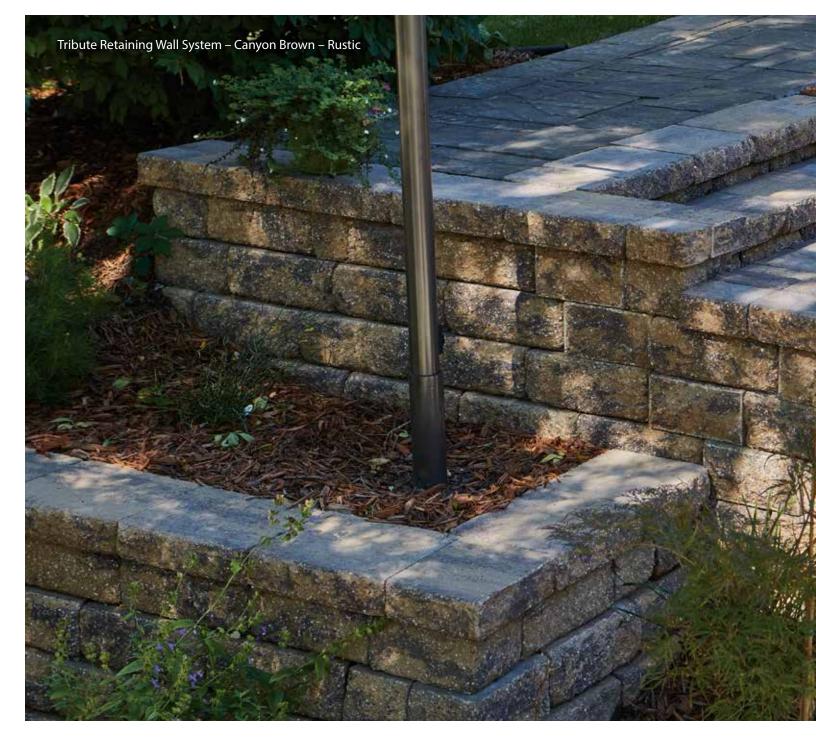

Tribute® Retaining Wall System

The Tribute Retaining Wall System is engineered for ease of use and maximum versatility.



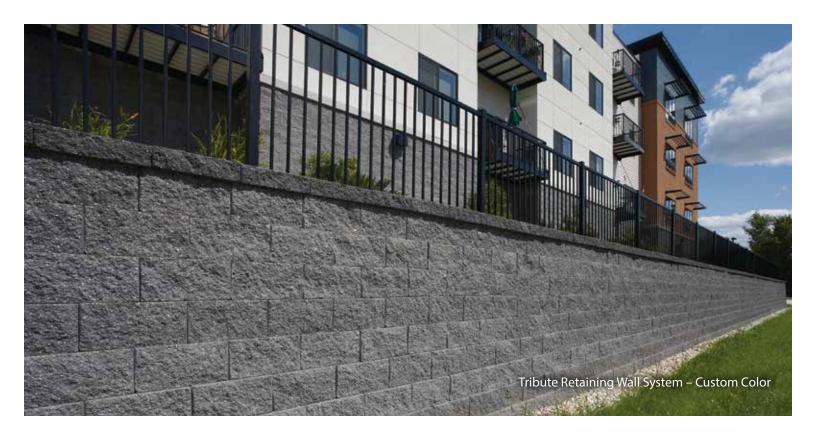

The **Tribute® Retaining Wall System** features solid block with multiple pin grooves on the top surface that allow for a combination of retaining and freestanding wall options, including vertical, stepped out or set back applications. Units can be efficiently split in half in the field to construct pillars or other wall accents, a perfect finishing touch to any project. With its countless design capabilities, Tribute Retaining Wall units are the premier choice for simple to ambitious landscape applications, including freestanding seat walls, steps, terraces and slope protection.

Note: Retaining Wall Caps are available (Information is located on page 153).

Sizes Tribute Retaining Wall System

Splitface	Rustic	D x H x L (Nominal Size) Inches • Millimeters	SF/ Unit	Units/ Pallet	Lbs/ Unit	Lbs/ Pallet
		12 x 6 x 16 • 305 x 152 x 406	.67	36	73	2675
		10 x 6 x 16 • 254 x 152 x 406	.67	36	63	2313
		12 x 6 x 8 • 305 x 152 x 203	.33	72	37	2675

[•] Calculate the number of Tribute full units needed: SF x 1.5

Color Options Tribute Retaining Wall System

Manufactured at our Appleton, WI location

Blended Colors




Manufactured at our Roberts, WI location

Manufactured at our Noberts, wirlocation



Wall Configurations Tribute Retaining Wall System



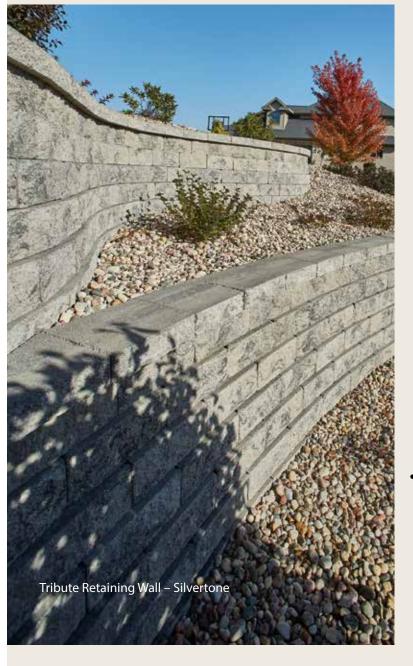


Tribute retaining walls with pins:

Each Tribute unit has a unique three-position pin placement system. Two pins per unit secure Tribute block in place.


 Tribute Two-sided Vertical Face Seat Wall Installation

It is recommended that all seat walls have the first course buried for embedment. Starting on the second and succeeding courses, position all Tribute units with the pinholes over the middle-receiving channel. This will lock the units in a vertical position. Seat walls should not exceed a height of 36".




Tribute Two-sided Recessed Face Seat Wall Installation

Starting with the second course, randomly place Tribute units over one of the receiving channels. Continue randomly positioning succeeding rows of units in the receiving channels on the remaining courses. This will give your Tribute retaining wall system a three dimensional look.



Tribute Set Back Retaining Wall Installation

Position pinholes of each successive Tribute unit over the rear-receiving channel on the lower unit. This placement will give your Tribute wall an approximate 7° set back.



Seat Walls and Columns Design Tribute Retaining Wall System

Finished Ends and Corners on Tribute Two-sided Seat Wall Installations

To finish your free standing seat wall on each end, split 2" off the back of each unit at the indicated grooves for a two-sided split appearance on the front and back faces. Then split the unit in half (front to back) at the indicated center notch to achieve two half blocks with three split sides. At your desired seat wall starting point, place one half block with a split surface facing out (Figure 2). Next install full units side-by-side for the length of the seat wall. End the course by placing another half block with a split surface facing out.

Second course: Split another two sided Tribute unit in half as before. On one half block, measure and mark the width of one face at 2-7/8". On the other split face, measure and mark its width at 4-7/8". Draw a line between each marked face and saw the unit along the appropriate angle to create a specially cut two-sided 1/4 return unit. Place one sawed 1/4 piece, split surface out, on the end of the first course to start the second course. Make sure the cut angle of this second course unit is opposite of the angle in the first course for proper bond. Use retaining wall adhesive to hold all end pieces securely in place. Continue laying standard units side-by-side, and install the other 1/4 return unit at the end of the seat wall following the same instructions.

Continue building successive courses by repeating instructions above, alternating each 1/4 return end unit and using adhesive for proper stability. When the seat wall is finished to the proper height, adhere caps for a finished effect.






Figure 2 Tribute Two-sided Seat Wall




Courses 1,3,5...




Courses 2,4,6...


Constructing Columns and Pillars with Tribute units:

Split Tribute units in half (as shown). Place four half units per course in alternating running bond pattern. Apply concrete adhesive between each course as you construct the pillar. The hollow area inside a pillar can accommodate electrical conduit for a light or a wood 4" x 4" post to support a trellis, light or garden gate.








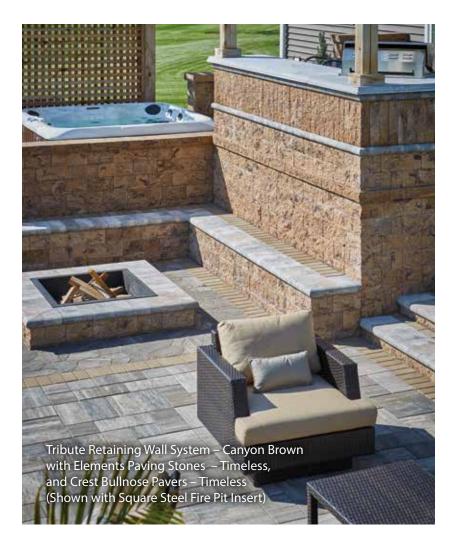



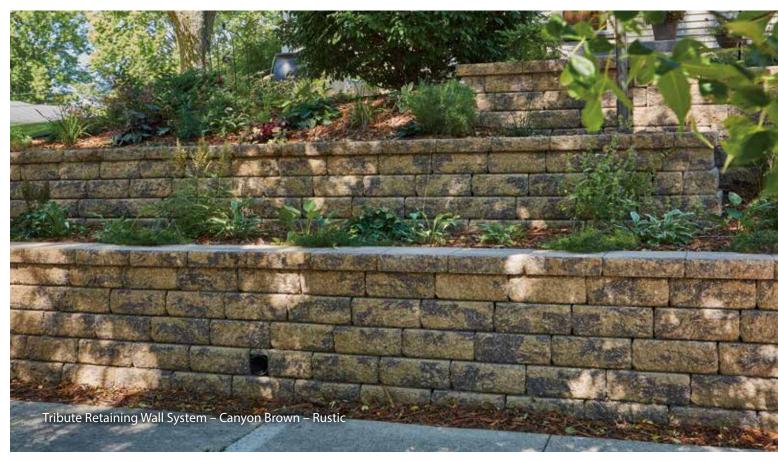








County Block® Retaining Wall System

The County Block Retaining Wall System blends seamlessly in classic and contemporary landscape settings.

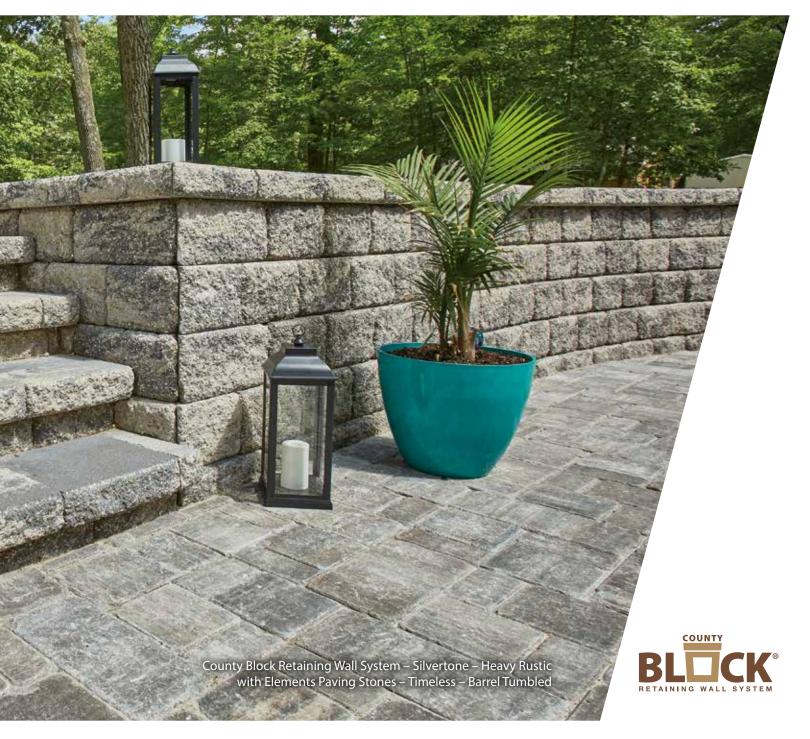



Designed with versatility in mind, **County Block® Retaining Wall System** is an impeccable solution for planting beds, steps or multi-level terraces. Installation is simple with its pin system. When filled with aggregate, the cored units provide one of the strongest and longest lasting connections available without the hassle or costs of mortar, special equipment or hard-to-find tools.

Crafted in a split face or rustic finish, County Block units harmonize with County Materials' line of landscaping products. Manufactured with high-strength and low absorption concrete and natural elements, the County Block Retaining Wall System is designed to withstand weather extremes while offering years of maintenance-free beauty.

Note: Retaining Wall Caps are available (Information is located on page 153).

Sizes County Block Retaining Wall System

Splitface	Rustic	D x H x L (Nominal Size) Inches • Millimeters	SF/ Unit	Units/ Pallet	Lbs/ Unit	Lbs/ Pallet
		12 x 7% x 18 • 305 x 194 x 457 Jumbo	.95	50	68	3445
		12 x 7% x 12½ • 305 x 194 x 318 Standard	.66	64	46	2965
		7% x 7% x 17½ • 194 x 194 x 445 Corner	.93	60	53	3225

- Calculate the number of:
- County Block Standard units needed: SF x 1.5
- County Block Jumbo units needed: SF x 1.05
- Calculate the equal number of both sizes blended into a County Block wall: SF divided by 1.61

Color Options County Block Retaining Wall System

Manufactured at our Appleton, WI location **Blended Colors Solid Colors** Standard Canyon Brown **Hickory Blend** Silvertone Swiss Mocha **Brown** Buff Manufactured at our Marathon, WI location **Blended Colors Solid Colors** Gray Standard **Hickory Blend** Silvertone Canyon Brown Brown Gray Manufactured at our Roberts, WI location **Blended Colors Solid Colors** Standard **Buff Canyon Brown Hickory Blend** Silvertone **Swiss Mocha** Brown **Blended Rustic Solid Rustic Blended Heavy** Solid Heavy Rustic Colors Rustic Colors Colors Colors Rustic/Heavy Rustic Gray

Silvertone

Heavy Rustic

Brown


Heavy Rustic

Brown

Rustic

Silvertone

Rustic

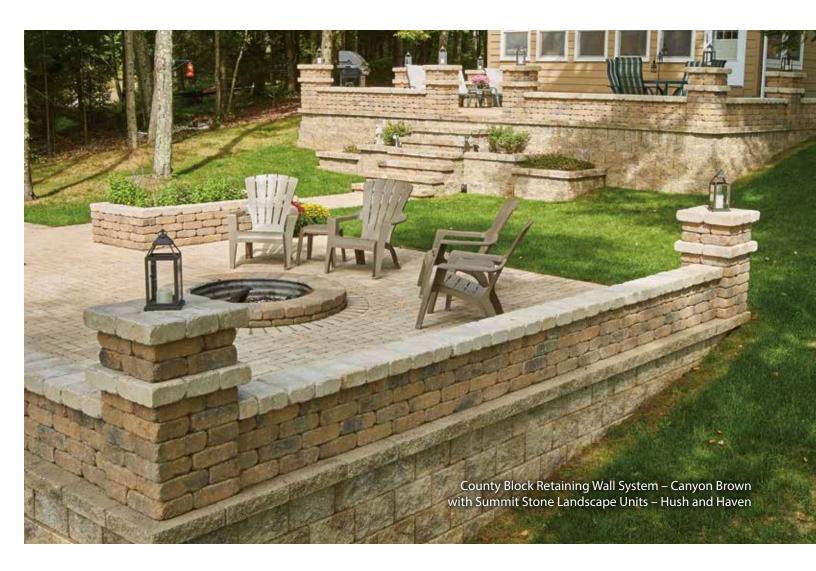










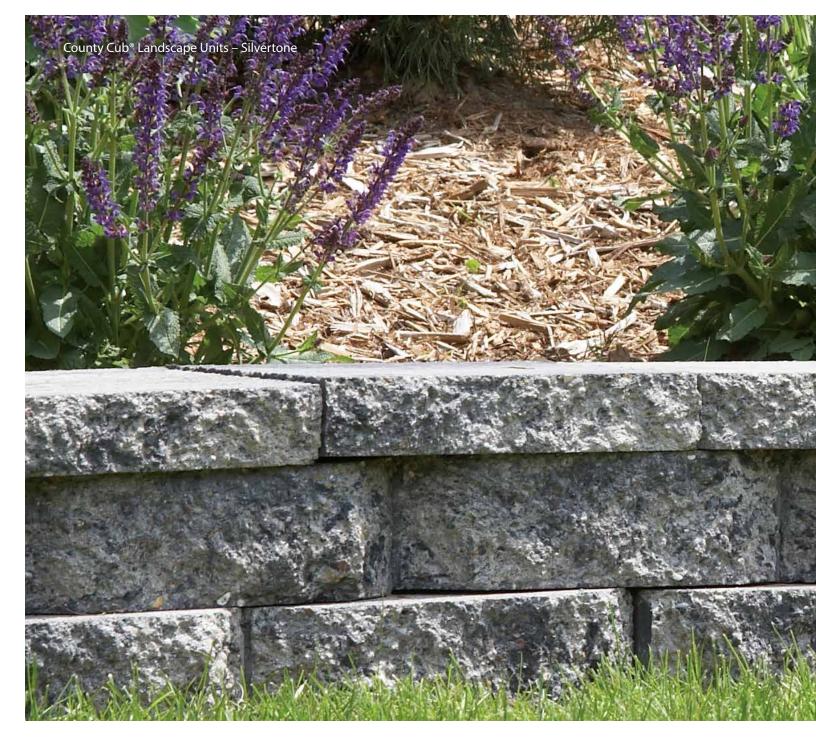

County Cub[®] Landscape Units

Ideal for low walls as well as subtle transitions and landscape accents, County Cub Landscape Units offer a natural stone appearance.





County Cub® Landscape Units are available in a range of earthy colors to compliment the rich hues of County Materials' paving stones. With their smaller scale and compact design, County Cubs can be quickly and easily installed to create a distinctive look in any lawn or garden setting.

Sizes County Cub Landscape Units




[•] Calculate the number of County Cub units needed: SF x 3.3

Color Options County Cub Landscape Units






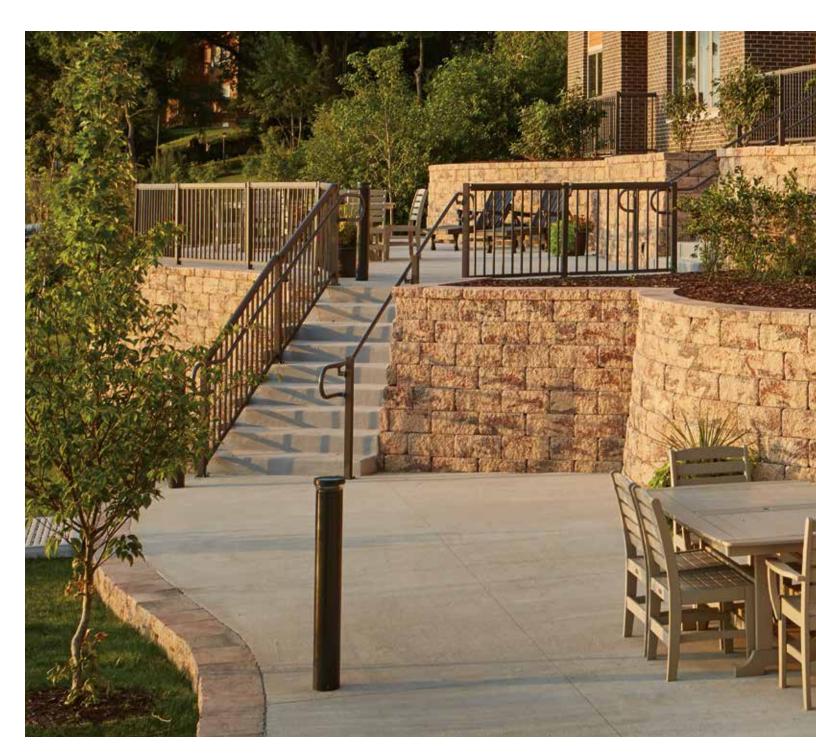

Integrity[™] Retaining Wall System

Integrity Retaining Wall System's unit size and scale make it perfect for larger, impressive wall projects.

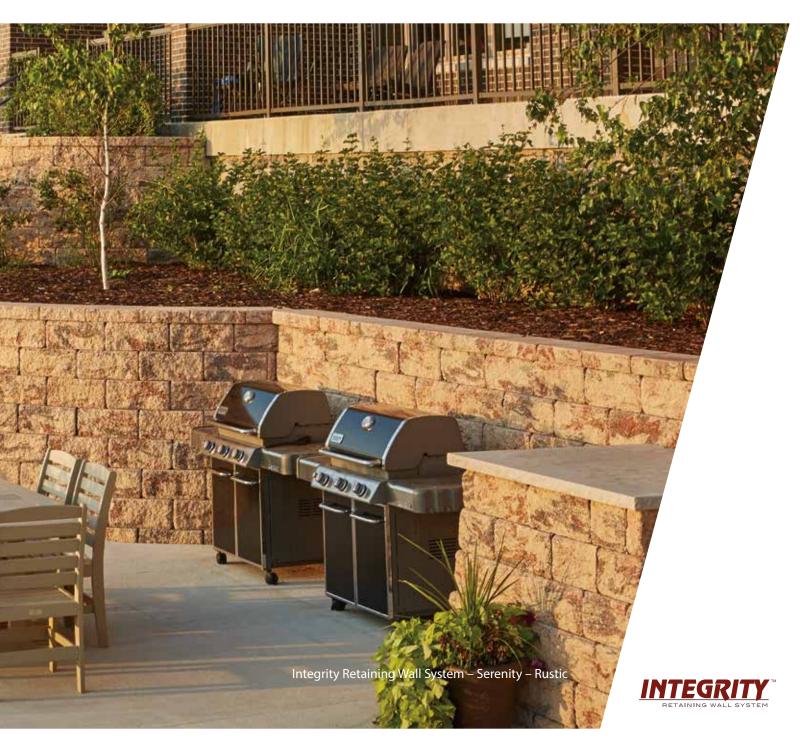



The **Integrity™ Retaining Wall System** is a practical solution for even challenging applications, including multi-level terraces and slope protection. Manufactured with a rear lip design and high-density concrete, the Integrity Retaining Wall System ensures efficient installation, increased stability and lasting durability. Units are available in natural-looking Splitface or weathered Rustic options.

Note: Retaining Wall Caps are available (Information is located on page 153).

Sizes Integrity Retaining Wall System

Splitface	Rustic	D X H X L (Nominal Size) Inches • Millimeters	SF/ Unit	Units/ Pallet	Lbs/ Unit	Lbs/ Pallet
		12 x 8 x 18 • 305 x 203 x 457 Standard	1	24	80	1965
		12 x 6 x 18 • 305 x 152 x 457 Junior	.75	32	63	2060
		3% x 8 x 12 • 92 x 203 x 305 Standard Corner	.67	60	27	1665
		3% x 6 x 12 • 92 x 152 x 305 Junior Corner	.5	60	20	1260

Color Options Integrity Retaining Wall System





• Also available in Heavy Rustic.








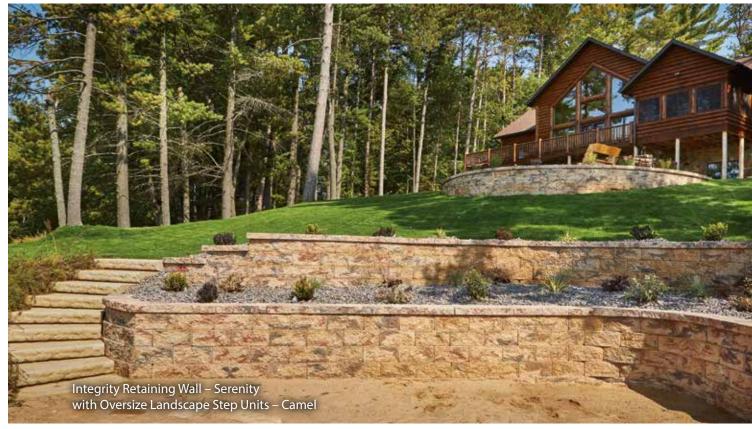

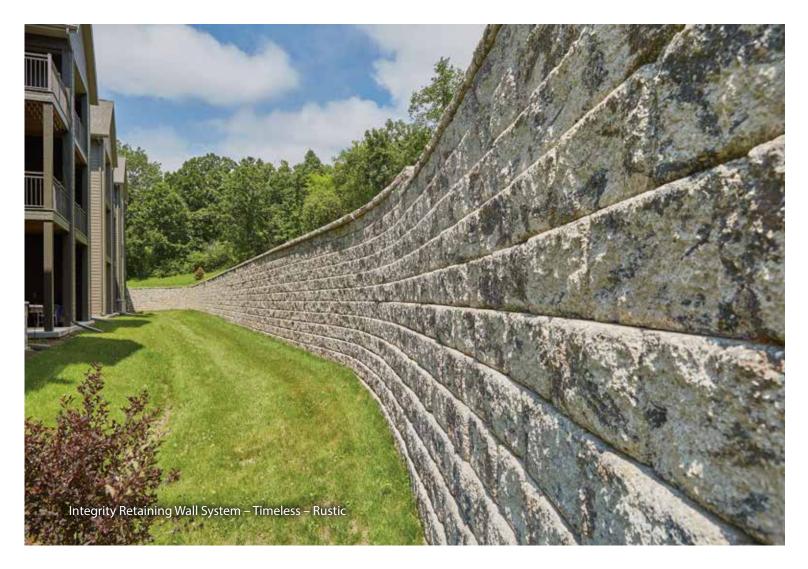




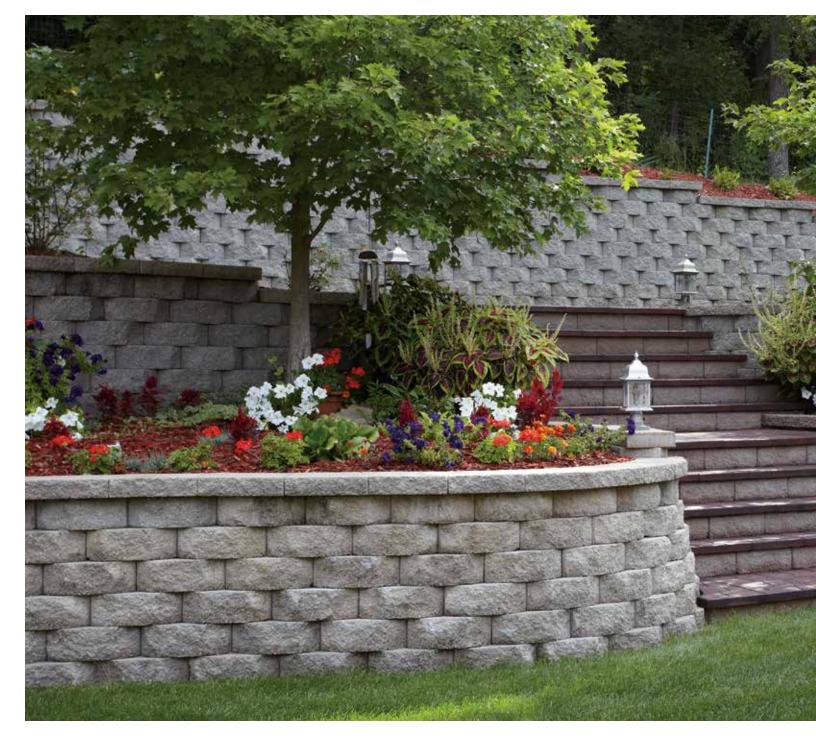

Winston® Retaining Wall System

Available in a straight and tri-split face design, the Winston Retaining Wall System is the right choice for one-of-a-kind landscaping results.

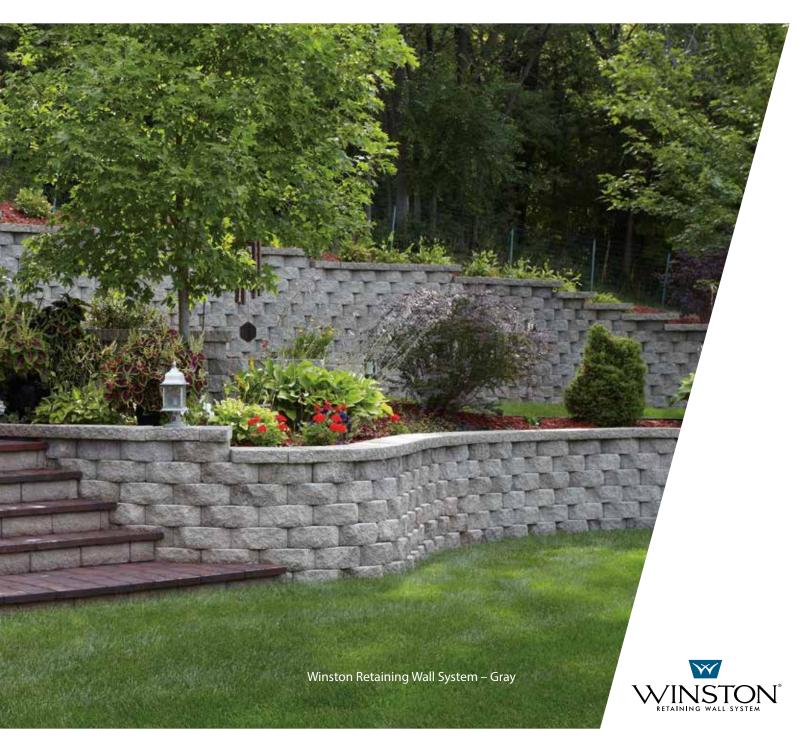



Winston® Retaining Wall System's full cores and built-in drainage provide strength and lasting performance. With their built-in setback design, Winston units install quickly and offer the correct slope for a stable wall. Form curved walls, steps, terraces and many other creative applications with this appealing wall system.

Note: Retaining Wall Caps are available (Information is located on page 153).

Sizes Winston Retaining Wall System


D x H x L (Nominal Size) Inches • Millimeters	SF/ Unit	Units/ Pallet	Lbs/ Unit	Lbs/ Pallet
12 x 6 x 17½ • 305 x 152 x 445 Straight	.73	54	64	3501
12 x 6 x 8¾ • 305 x 152 x 222 Straight Corner	.38	108	33	3609
12 x 6 x 16 • 305 x 152 x 406 Tri-Split	.67	54	60	3285
12 x 6 x 8 • 305 x 152 x 203 Tri-Split Corner	.33	108	32	3501


Note: Only available in select markets. Contact your County Materials' representative for details.

Color Options Winston Retaining Wall System





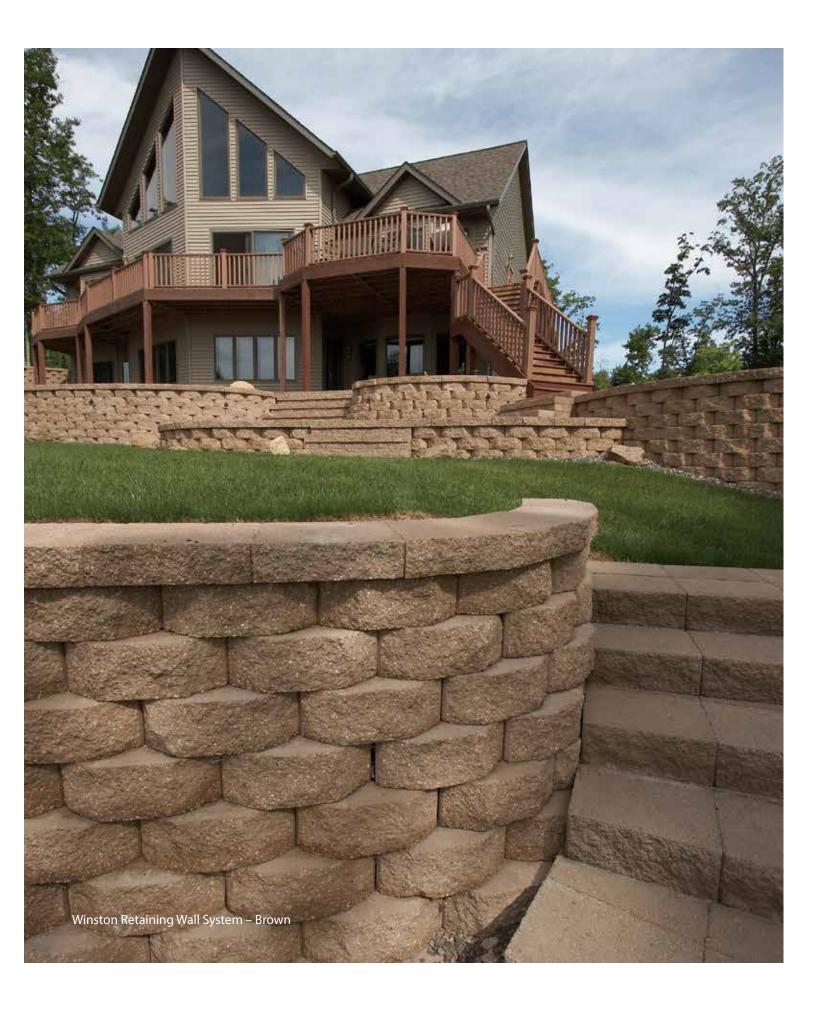

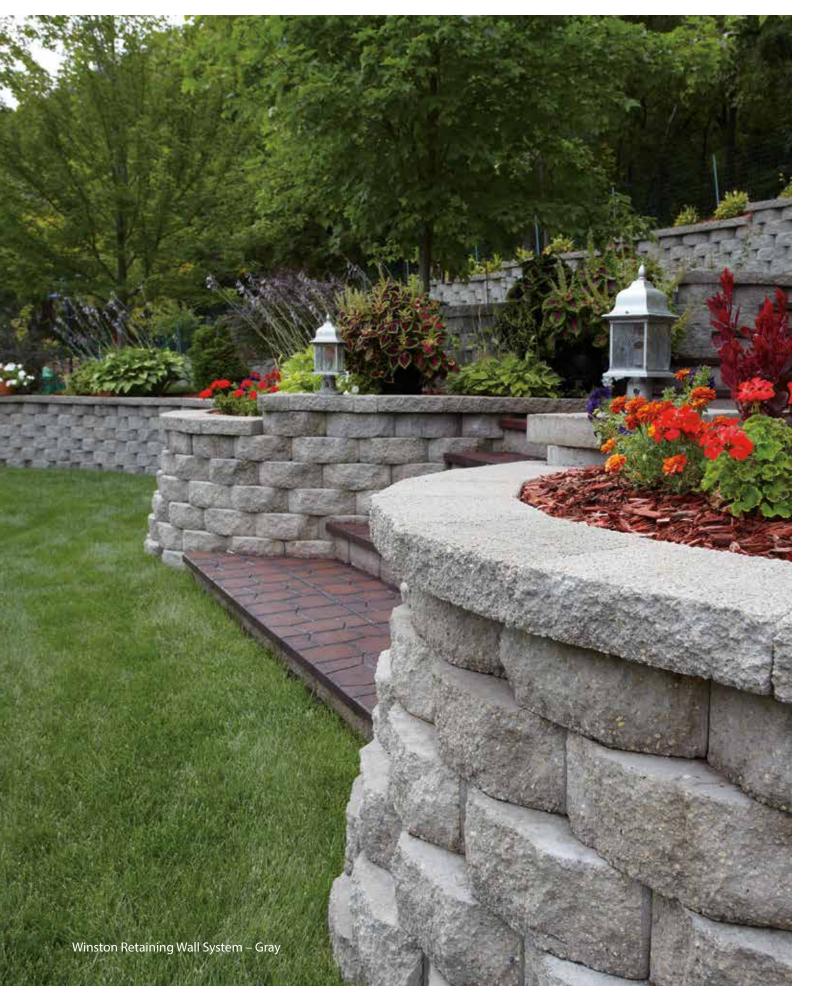



Terrace Stone® Retaining Wall System

Bring depth and distinct beauty to landscape projects with the Terrace Stone Retaining Wall System.





The **Terrace Stone® Retaining Wall System** is manufactured with a tri-split face that resembles natural cut stone, Terrace Stone brings shadows out in the open. An interlocking design allows for efficient installation and a structurally sound wall.

Note: Retaining Wall Caps are available (Information is located on page 153).

Sizes Terrace Stone Retaining Wall System

D X H X L (Nominal Size) Inches • Millimeters	SF/ Unit	Units/ Pallet	Lbs/ Unit	Lbs/ Pallet
12 x 8 x 16 • 305 x 203 x 406 Standard	.89	36	75	2745
12 x 8 x 8 • 305 x 203 x 203 Corner	.44	72	40	2925

Note: Only available in select markets. Contact your County Materials' representative for details.

Color Options Terrace Stone Retaining Wall System

Blended Colors

Solid Colors


Canyon Brown


Silvertone


Solid Colors

Frown

Gray

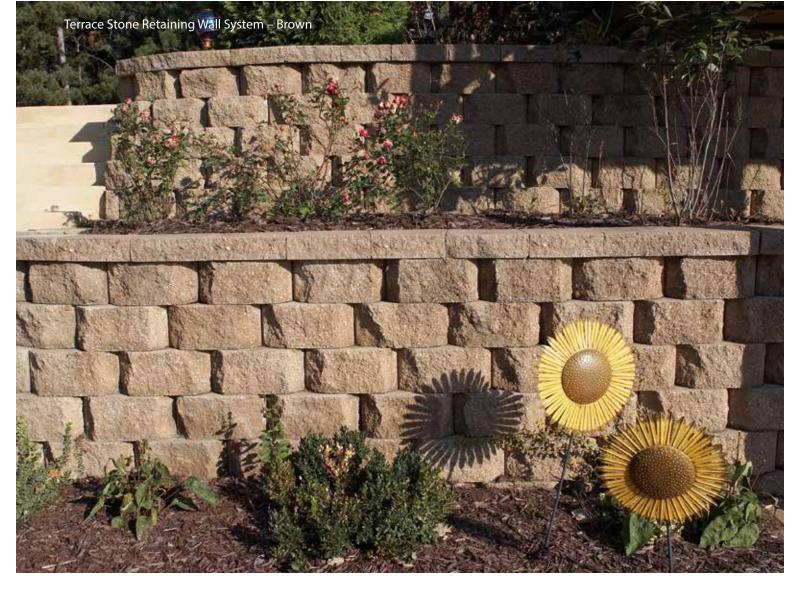

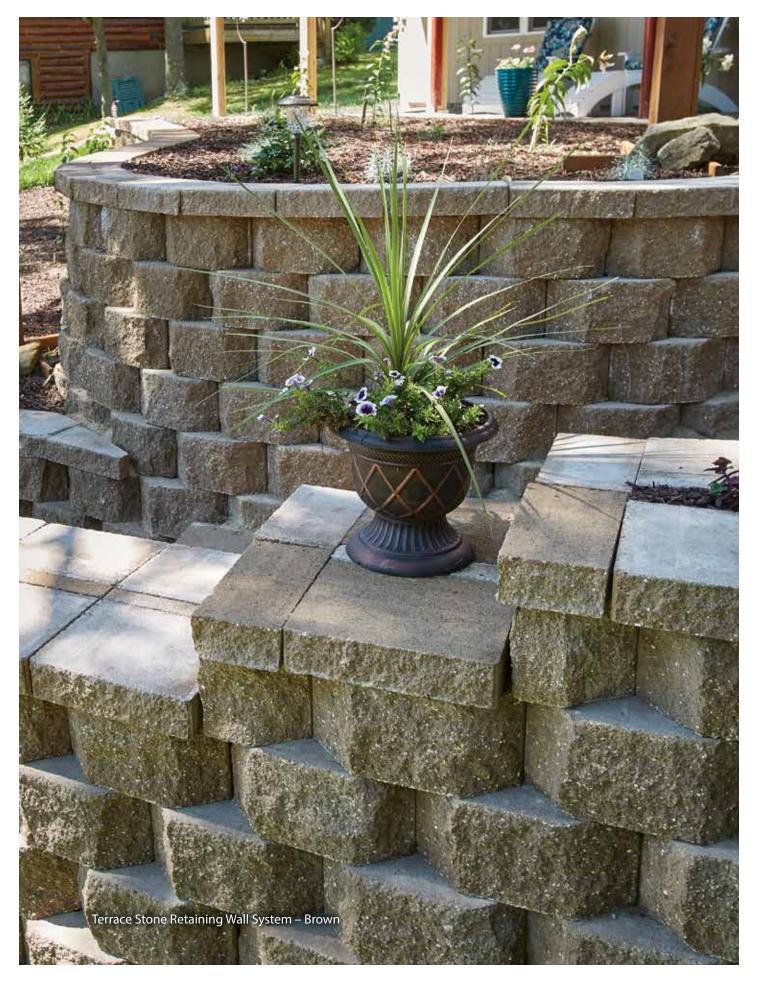

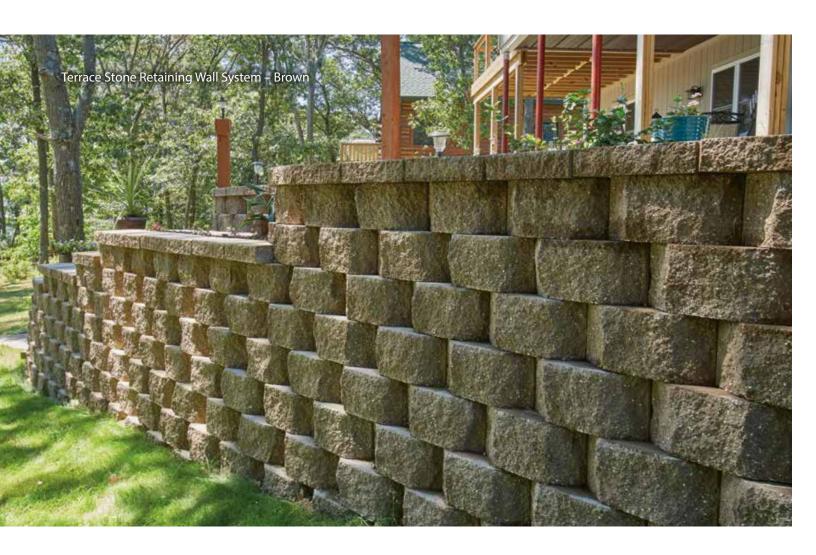






Navaro® Retaining Wall System

Structural strength and distinctive character are combined in the Navaro Retaining Wall System.



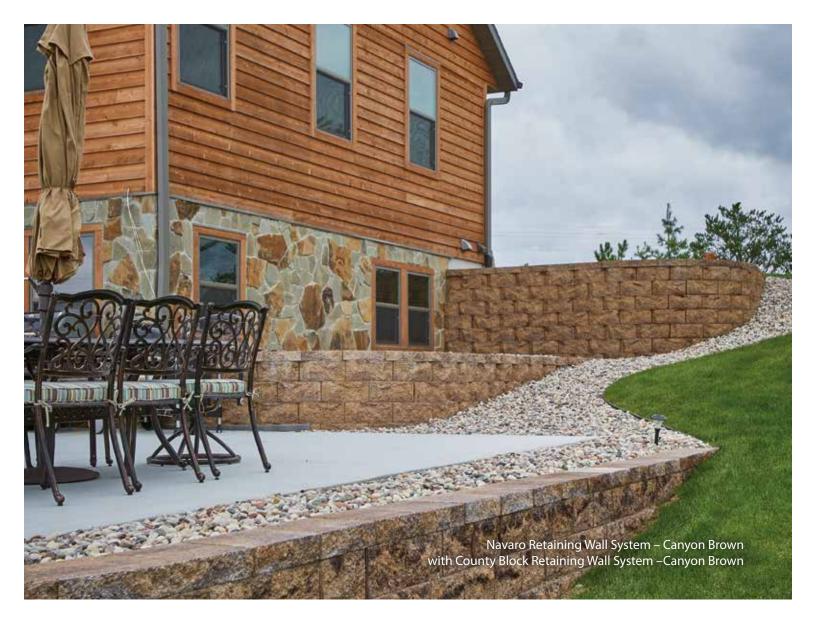

The **Navaro® Retaining Wall System** rounded split face affords a hand-cut stone appearance. High-strength polyresin pins firmly lock each unit into place and ensure accurate alignment. The Navaro Retaining Wall System is an ideal solution for raised patios, steps, planting beds, erosion control and terraces. With geosythentic reinforcement and engineering, taller Navaro Retaining Walls can be constructed.

Note: Retaining Wall Caps are available (Information is located on page 153).

Sizes Navaro Retaining Wall System



D X H X L (Nominal Size) Inches • Millimeters

12 x 75% x 173% • 305 x 194 x 441


Standard

SF/	Units/	Lbs/	Lbs/
Unit	Pallet	Unit	Pallet
.92	50	70	


[•] Calculate the number of Navaro units needed: SF x 1.08


Color Options Navaro Retaining Wall System



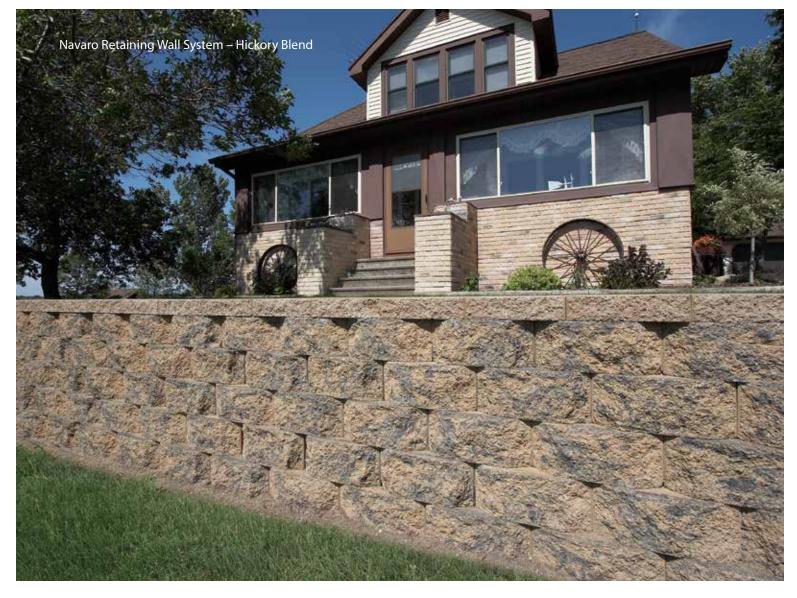



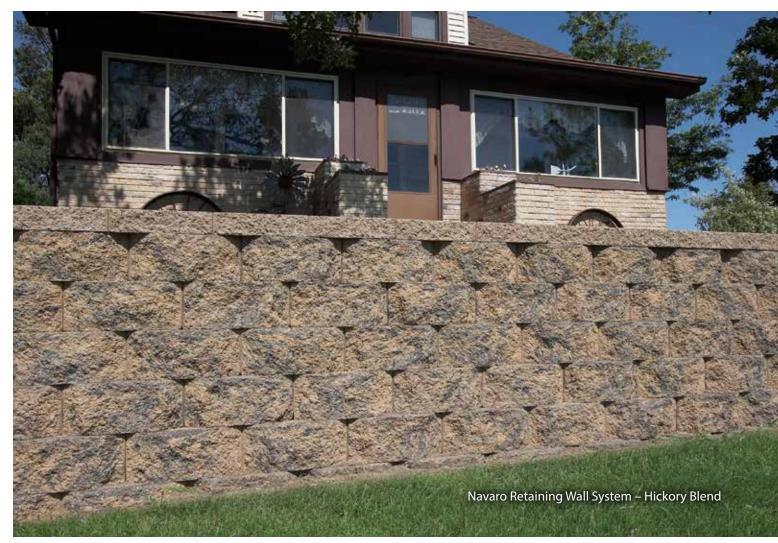

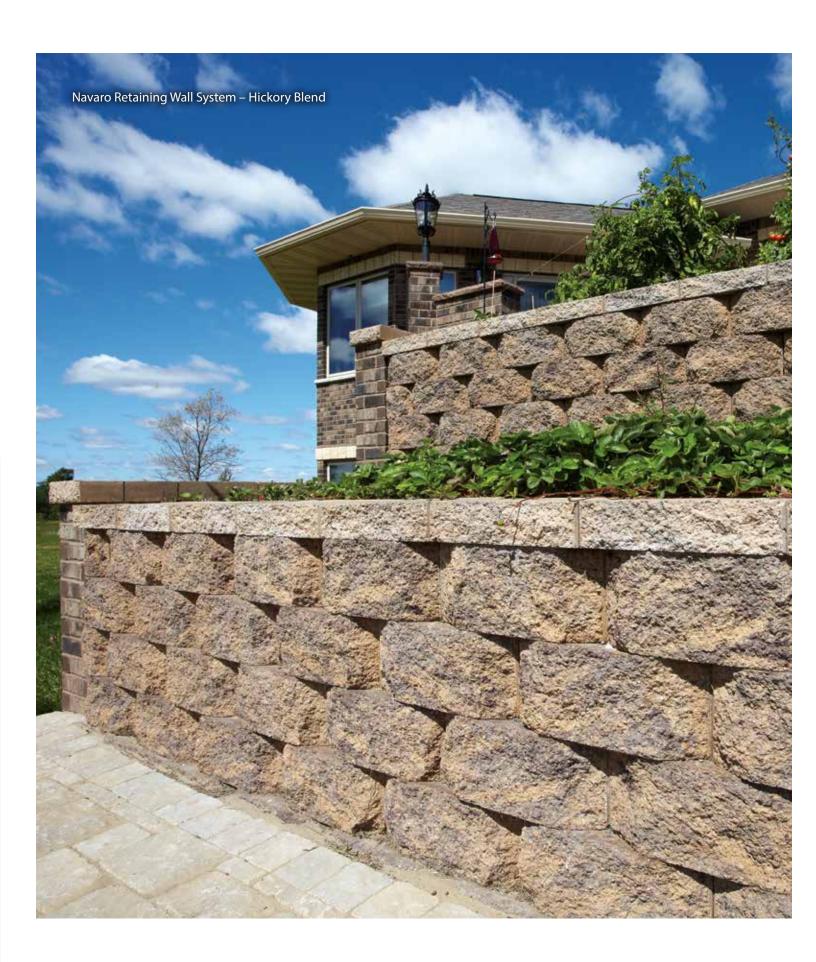



Landscape Step Units

Landscape Step Units feature a natural-looking stone texture on their front face and decorative beveled front edge that compliments County Materials' pavers and retaining wall systems.





Landscape Step Units smooth stepping surface provides solid and safe footing. Their size speeds up installation time for steps and reduces the amount of retaining wall block needed. Landscape Step Units can also be cut onsite to fit project needs.

Sizes Landscape Step Units




D x H x L (Nominal Size) Inches


14 x 6 x 24

Units/	Lbs/	Lbs/
Pallet	Unit	Pallet
10	164	1680

Color Options Landscape Step Units

Solid Colors

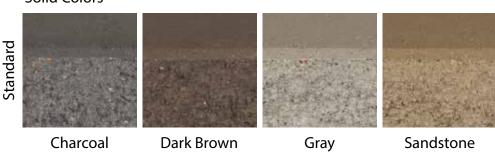

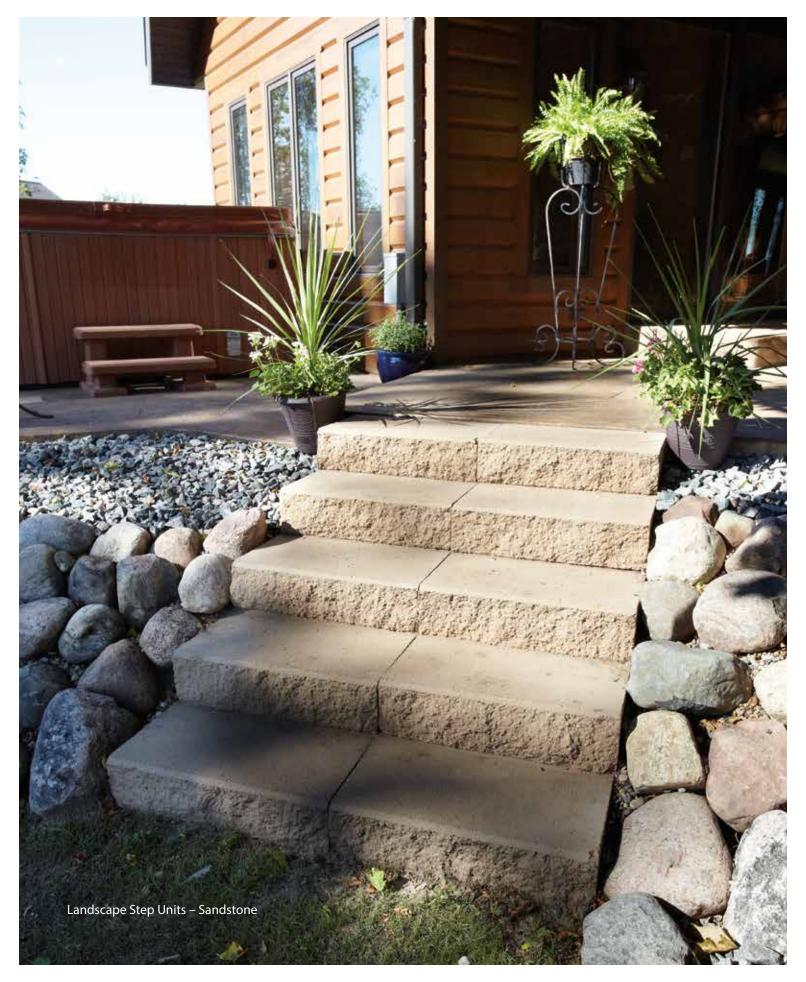



Oversize Landscape Step Units


Oversize Landscape Step Units are a functional option for a variety of step applications, including traditional or free-flowing staircases, landings, water features, walls or accents.





The optimal finishing touch to any landscaping masterpiece: **Oversize Landscape Step Units.** Manufactured with uniform heights and a naturally textured surface, their consistent rise enhances pedestrian comfort and safety. Their larger scale also covers more square footage than alternative step options, speeding installation and reducing labor costs. With their natural rock outcropping appearance, Oversized Landscape Step Units offer an organic appeal to landscape projects.

Sizes Oversize Landscape Step Units



D x H x L (Nominal Size) Inches


25 x 61/4 x 48

Units/	Lbs/	Lbs/
Pallet	Unit	Pallet
4	760	3085

Color Options Oversize Landscape Step Units

Solid Colors










Gray

Portobello



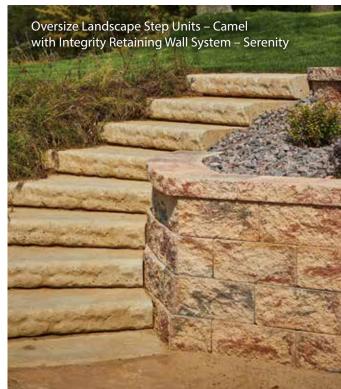

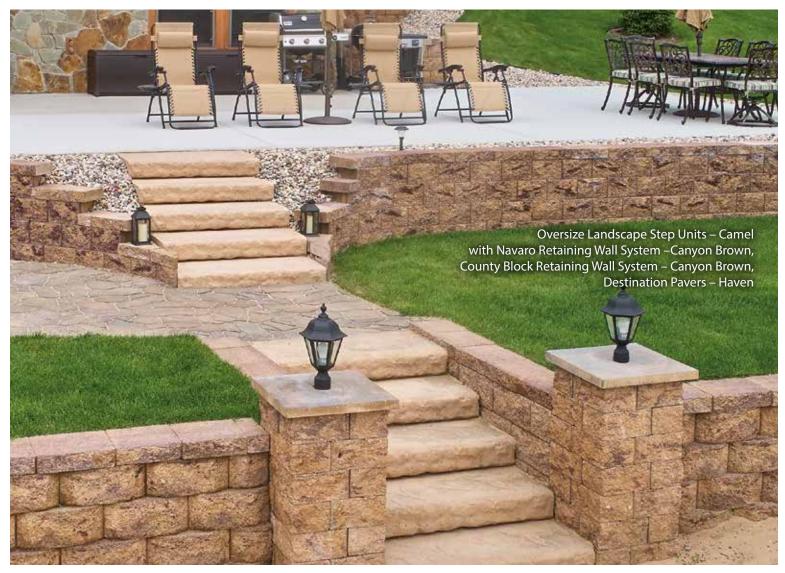

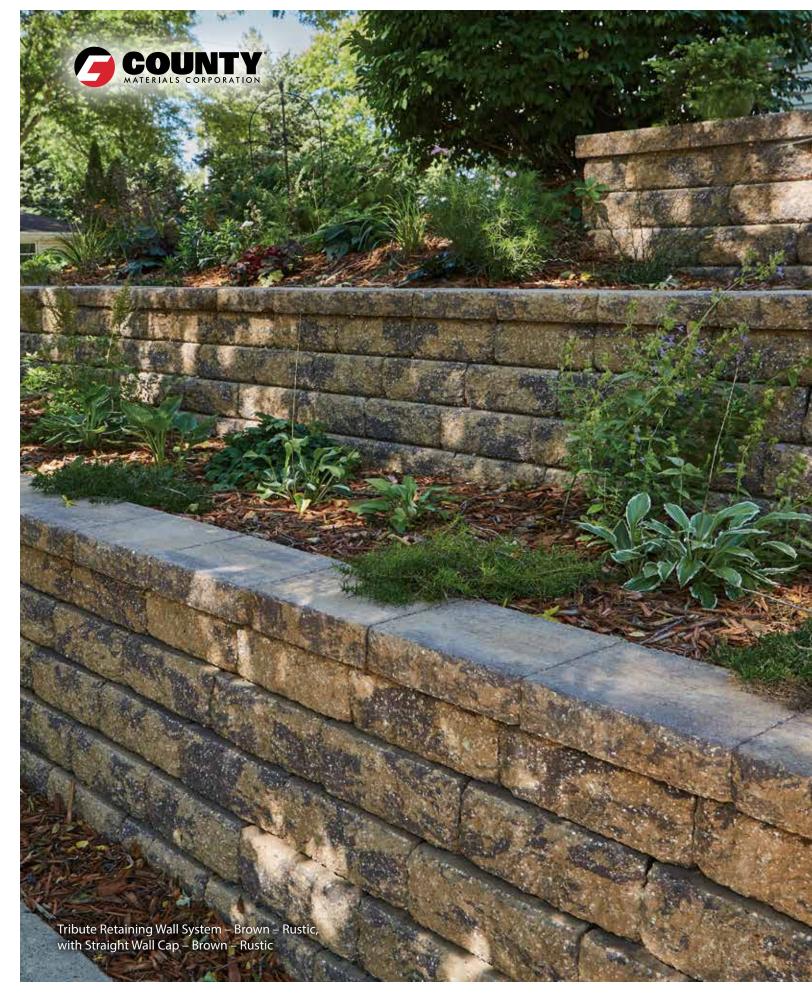

Related Retaining Wall Items

Wall Caps





Splitface	Rustic	D x H x L (Nominal Size)	SF/	Units/	Lbs/	Lbs/
		Inches • Millimeters	Unit	Pallet	Unit	Pallet
		12 x 3% x 15½ • 305 x 92 x 394 Straight Wall Cap	-	70	54	3805
	123	4 x 35% x 77% -93% • 324 x 92 x 200-238 Tapered Wall Cap	-	90	30	2605

Notes:

- Split on one side
- Also available in Heavy Rustic texture
- Color options for wall caps will vary depending on the retaining wall units they are ordered with. Contact your County Materials' representative for wall cap colors.

Adhesive


Product	Case Qty.
SRW Adhesive 10.5 oz.	12
SRW Adhesive 29 oz.	12

Landscape Fabric

Product
Mirascape 3' x 300' (per sq yd)
SRW 3'x 50' (per roll)
SRW 3'x 300'(per roll)
SRW 4'x 300' (per roll)
SRW 6'x 300'(per roll)
SRW 12'x 300' (per roll)


Geogrid

Product				
SRW 3-6'x 50'(per roll)				
SRW 3-6'x 150'(per roll)				
SRW 3- 12'x 150' (per roll)				
SRW 5-6'x 150' (per roll)				

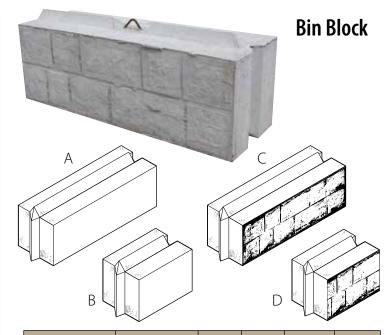

Product	Size D x H x L (inches)	SF/ Unit	Units/ Pallet	Lbs./ Unit	Lbs./ Pallet
Full Bin Block- Smooth-A	24 x 24 x 72	12	1	3600	3645
Half Bin Block- Smooth-B	24 x 24 x 36	6	1	1800	1845
Full Bin Block- Cutstone-C	24 x 24 x 72	12	1	3600	3645
Half Bin Block- Cutstone-D	24 x 24 x 36	6	1	1800	1845



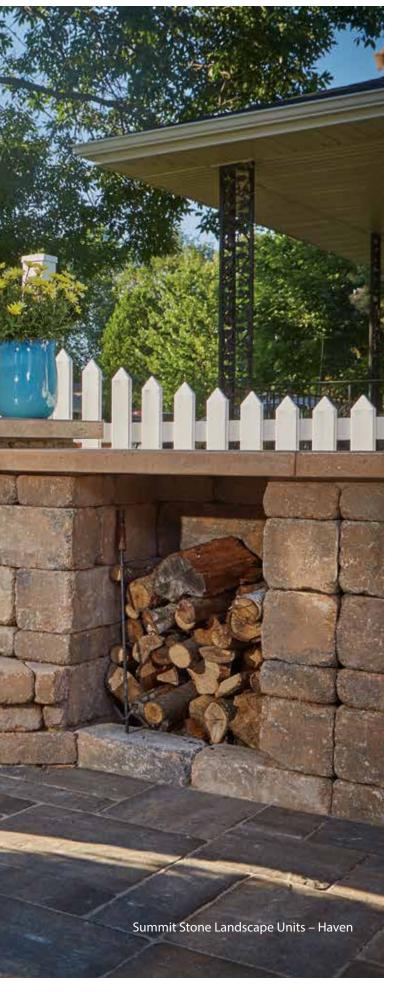


Outdoor Living Products

- Summit Stone® Landscape Units
- Reflection Stone® Masonry Units
- Align International Natural Stone Veneer

Related Outdoor Living Items:

- Isokern Fireplace & Chimney Components
- Fire Pit Inserts

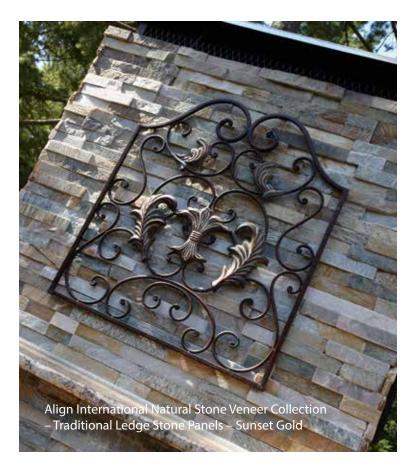


The color photos shown in this catalog were prepared with careful attention to accuracy. However, colors shown may vary from actual hues and should only be used as a guide. Refer to actual product samples for final color selection. Because concrete units are manufactured with high quality, naturally-mined aggregates and materials, variations in color or shading should be expected in products that are manufactured at different times and in units having different shapes. This color or shading variation is acceptable in the industry.



Summit Stone® Landscape Units

Summit Stone Landscape Units offer incredible design flexibility for creating almost any outdoor landscape features.

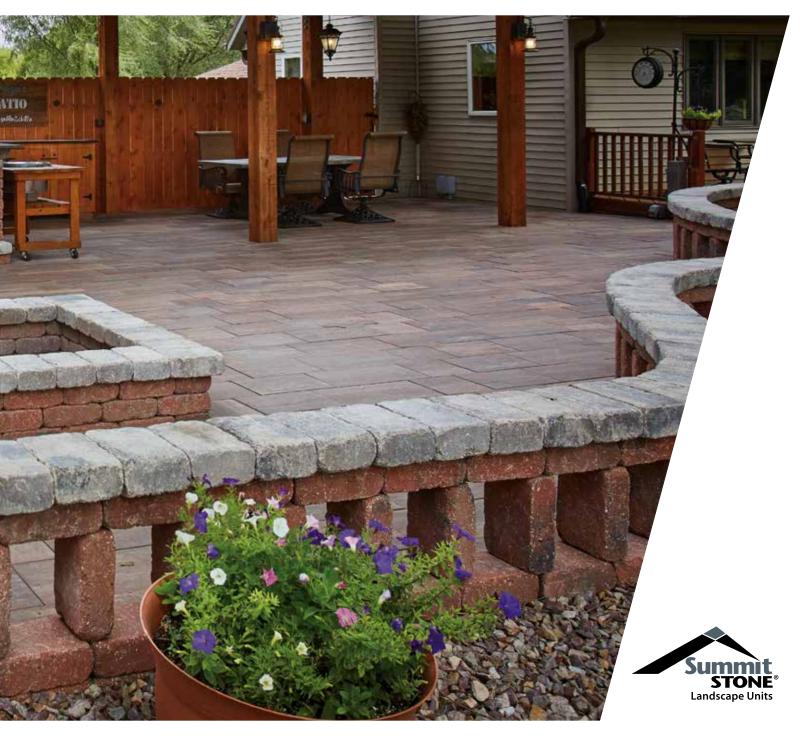



Summit Stone® Landscape Units'


dimensional shape and multiple unit sizes make them ideal for constructing custom outdoor fireplaces and kitchens, built in grills, seat walls, pillars and more. Summit Stone's weathered finish is the crowning touch that compliments County Materials' line of landscaping products.

- Calculate the number of Summit Stone needed:
- for a 10-7/8" thick wall: SF x 5.84
- for a 7-1/4" thick wall: SF x 3.65


Sizes Summit Stone Landscape Units

	D x H x L (Nominal Size) Inches • Millimeters	SF/ Unit	Units/ SF	SF/ Layer	Layers/ Pallet	SF/ Pallet	Units/ Layer	Units/ Pallet	Lbs/ Unit	Lbs/ Pallet
A 10 10 10 10 10 10 10 10 10 10 10 10 10	7¼ x 35% x 7¼ • 184 x 92 x 184	.18	5.55	5.40	8	43.20	30	240	14	3410
В	7½ x 35/8 x 107/8 • 184 x 92 x 276	.27	3.70	5.40	8	43.20	20	160	21	3410
10 10 10 10 10 10 10 10 10 10 10 10 10 1	7¼ x 35% x 14½ • 184 x 92 x 368	.37	2.70	5.55	8	44.40	15	120	28	3410
D to a	7¼ x 7¼ x 7¼ • 184 x 184 x 184	.37	2.70	11.10	4	44.40	30	120	28	3410
E	7¼ x 7¼ x 107/8 • 184 x 184 x 276	.55	1.82	11.00	4	44.40	20	80	42	3410
F	7¼ x 7¼ x 14½ • 184 x 184 x 368	.73	1.37	10.95	4	43.80	15	60	56	3410
G	7¼ x 35% x 10% • 184 x 92 x 276	.27	3.70	6.48	7	45.36	24	168	17.9	3097

Layer Patterns Summit Stone Landscape Units

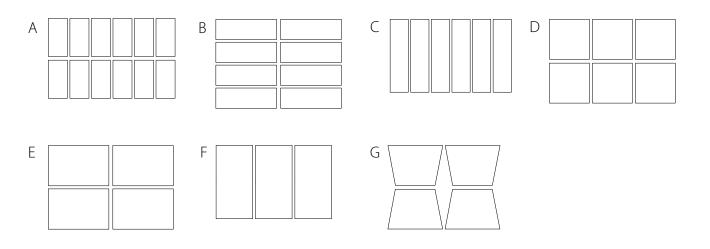

Color Options Summit Stone Landscape Units







Fireplaces Summit Stone Landscape Units

Summit Stone Standard Fireplace



Product	Size D x H x L (inches)			
Summit Fireplace Standard	54 ³ / ₄ x 79 ³ / ₄ x 84 ¹ / ₄			

Standard Fireplace components include:

(5) - 6" concrete block

(5) - 3" soaps

(14) - Summit Stone $(7^{1}/_{4}'' \times 3^{5}/_{8}'' \times 10^{7}/_{8}'')$ units special cut $(^{1}/_{3} \text{ and } ^{2}/_{3})$

(1) - 10 lbs. pail of Heat Stop II refractory clay

(75) - fire brick 21/2" thick

(1) - 47" x 31/2" x 31/2" steel lintel

(1 left and 1 right) - Summit Stone $(7^{1}/_{4}" \times 3^{5}/_{8}" \times 10^{7}/_{8}")$ special cut lintel pad unit

- In addition to the standard fireplace components listed above, 320 Summit Stone ($7^{1}/_{4}$ " x $3^{5}/_{8}$ " x $10^{7}/_{8}$ ") are needed to complete project.
- Concrete adhesive is sold separately. Approx. 10-12 tubes of adhesive will be required, depending on the quantity applied to each Summit Stone.

Approx. 8000 lbs. - 3 total pallets

Summit Stone Double Woodbox Fireplace



Product	Size D x H x L (inches)
Summit Fireplace Double Woodbox	54 x 79³/ ₄ x 141³/ ₈

Double Woodbox Fireplace components include:

- (5) 6" concrete block
- (16) 4" concrete block
- (5) 3" soaps
- (18) Summit Stone $(7^{1}/_{4}" \times 3^{5}/_{8}" \times 10^{7}/_{8}")$ units special cut $(1/_{3} \text{ and } 2/_{3})$
- (1) 10 lbs. pail of Heat Stop II refractory clay
- (75) fire brick $2^{1/2}$ " thick
- $(1) 47'' \times 3^{1/2}'' \times 3^{1/2}''$ steel lintel
- $(2) 42'' \times 3^{1/2}'' \times 3^{1/2}''$ steel lintels
- (1 left and 1 right) Summit Stone ($7^{1}/4^{n} \times 3^{5}/8^{n} \times 10^{7}/8^{n}$) special cut lintel pad unit
- (2) Summit Stone $(7^1/4^n \times 3^5/8^n \times 10^7/8^n)$ units special cut common grooved lintel pad
- In addition to the double woodbox fireplace components listed above, 500 Summit Stone (71/4" x 35/8" x 107/8") are needed to complete project.
- Concrete adhesive is sold separately. Approx. 10-12 tubes of adhesive will be required, depending on the quantity applied to each Summit Stone.

Approx. 12,000 lbs. - 5 total pallets

Disclaimer: This is a basic outdoor fireplace kit design. Outdoor fireplaces should always be constructed by a knowledgeable professional. Location, chimney height, flue size and prevailing winds can affect the performance of a an outdoor fireplace. County Materials cannot guarantee the performance or structural integrity of this fireplace. Use only industry accepted materials, cements and adhesives when constructing an outdoor fireplace. Always observe building codes and local bylaws.

Summit Stone Corner Fireplace



Product	Size D x H x L (inches)
Summit Fireplace Corner	82 x 79 ³ / ₄ x 104

Corner Fireplace components include:

- (20) 8" 1/4 concrete block
- (5) 6" concrete block
- (20) 4" concrete block
- (5) 3" soaps
- (54) Summit Stone $(7^{1}/_{4}'' \times 3^{5}/_{8}'' \times 10^{7}/_{8}'')$ units special cut $(1/_{3} \text{ and } 2/_{3})$
- (1) 10 lbs. pail of Heat Stop II refractory clay
- (75) fire brick $2^{1/2}$ " thick
- $(1) 47" \times 3^{1/2}" \times 3^{1/2}"$ steel lintel
- (1 left and 1 right) Summit Stone ($7^{1}/_{4}$ " x $3^{5}/_{8}$ " x $10^{7}/_{8}$ ") special cut lintel pad unit
- (2) Summit Stone $(7^{1}/4^{n} \times 3^{5}/8^{n} \times 10^{7}/8^{n})$ units special cut common grooved lintel pad
- In addition to the corner fireplace components listed above, 420 Summit Stone $(7^{1}/4^{n} \times 3^{5}/8^{n} \times 10^{7}/8^{n})$ are needed to complete project.
- Concrete adhesive is sold separately. Approx. 10-12 tubes of adhesive will be required, depending on the quantity applied to each Summit Stone.

Approx. 10,320 lbs. - 4 total pallets

Fire Pits and Serpentine Wall Designs Summit Stone Landscape Units

Summit Stone Circular Fire Pit Design



Summit Stone G Tapered Unit

The Summit Stone G Tapered Unit can be used to design circular or square Fire Pits and Serpentine Walls. The G Tapered Unit is available in 4 colors (Haven, Hush, Solace and Timeless) and sold by the unit.

36" Diameter Fire Pit Design Estimate

- (17) "G" units per layer
- 54" outside and 39" inside diameters

42" Diameter Fire Pit Design Estimate

- (17) "G" units and 2 "A" units per layer
- 59" outside and 44" inside diameters

48" Diameter Fire Pit Design Estimate

- (16) "G" units and (6) "A" units per layer
- 66" outside and 51" inside diameters

Larger Diameter Fire Pits

Larger diameter firepit designs can be accommodated if desired by adding additional "G" and "A" units per layer.

NEW for 2018!

Summit Stone Square Fire Pit Design



36" Square Fire Pit Design Estimate

- 3 layers high (30) "A" units, (12) "B" units and (12) "C" units.
- 50.75" outside and 36.25" inside dimensions
- Optional Steel Fire Pit Inserts Circular or Square (sold separately)
- Optional Firebrick splits (sold separately)
- Refer to Fire Pit Inserts on page 179

Summit Stone 3' High Serpentine Wall Design



Pillar Construction Summit Stone Landscape Units




Decorative Pillars

Summit Stone® is designed to let you build decorative pillars as individual accents or in combination with small decorative walls. No cutting or fitting is required.

To make a pillar with Summit Stone, place units in alternating layers as shown in the illustration below. Make sure you build on level and well compacted ground and recommended base pad. (Ask a Summit Stone dealer for quidelines.)

Apply concrete adhesive between each course as you construct the pillar. Place adhesive on the touching ends and undersides of each cap unit.

The hollow area inside of each pillar can accommodate electrical conduit for a light or a wood 4" x 4" to support a trellis, a lamp post or a garden gate.




NOTE: Outside measurements of cap layer will be approximately 22"x 22". Post and wall heights should not exceed 36". For decorative walls, columns and steps, 1 to 2 layers of Summit Stone units should be buried below grade for proper embedment.



Pillars with Electrical Conduit

- Sonotube must be placed 4' below grade.
- 24" x 24" x 4" concrete base is joined to the sonotube column with rebar.
- Conduit is placed 12" 18" below grade (min.).
- Place units in alternating layers as shown below.
- Build on level and well-compacted ground and recommended base pad.

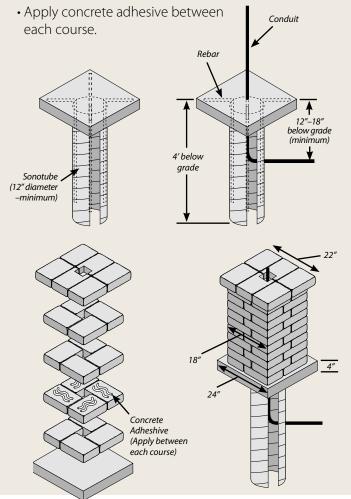


Seat Walls, Alcoves and Tables Summit Stone Landscape Units




Seat Wall Patterns

Create Seat Walls that define the boundaries of your outdoor living patio spaces.

Seat Walls: Formula for calculating Linear Feet





7 block per lineal foot.

Example: A 10-foot wall requires 70 block.


Special Features: Surrounds/Alcoves for Grills, Refrigerators, etc.

Enhance Your Outdoor Living Space


Outdoor kitchen appliances can be nestled into coves constructed of Summit Stone Tumbled Landscape Units, giving your outdoor living space an attractive, completed appearance.




Alcove Layout #1



Alcove Layout #2



Alcove Layout #3



Tables and Counters

Add functionality to your outdoor living space with a Summit Stone constructed table, storage space, bar, etc.



Summit Stone Landscape Units – Solace and Timeless with Grand Milestone Pavers – Serenity














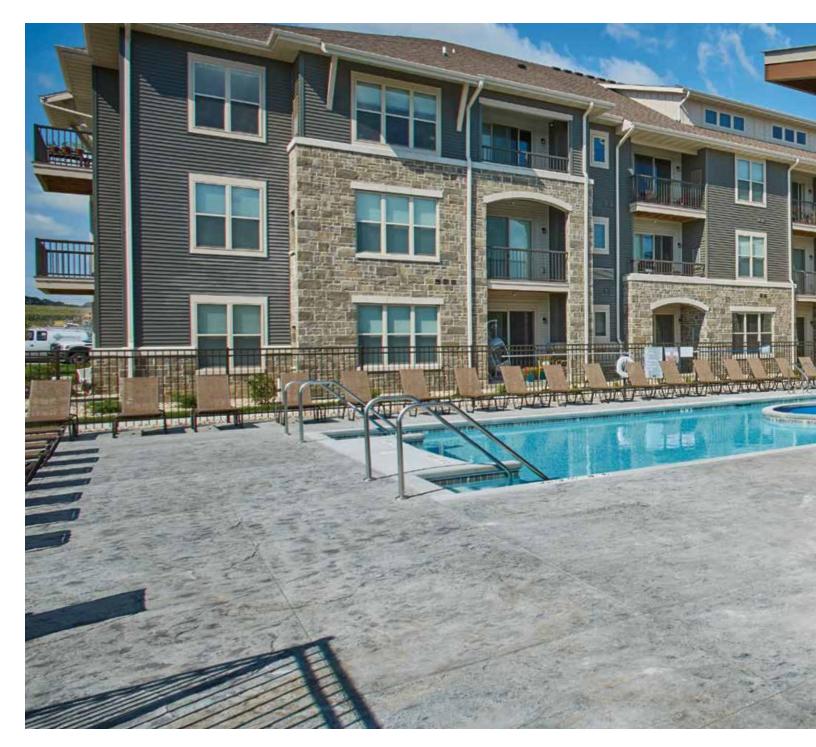

Reflection Stone® Masonry Units


Reflection Stone Masonry Units combine the advantages of a high strength concrete veneer with the timeless character of natural hand-hewn stone.





Reflection Stone® Masonry Units make an impression by mirroring the craftsmanship of centuries old stonework. County Materials' Reflection Stone line is available in three size modules: Reflection Stone, Reflection Stone GRAND and Reflection Brick. Each size can be installed as a stand-alone series or combined for custom applications. The Reflection Stone series is also available in full and thin veneer units, making them ideally suited for interior and exterior applications.

Sizes Reflection Stone Masonry Units • Full Veneer Units

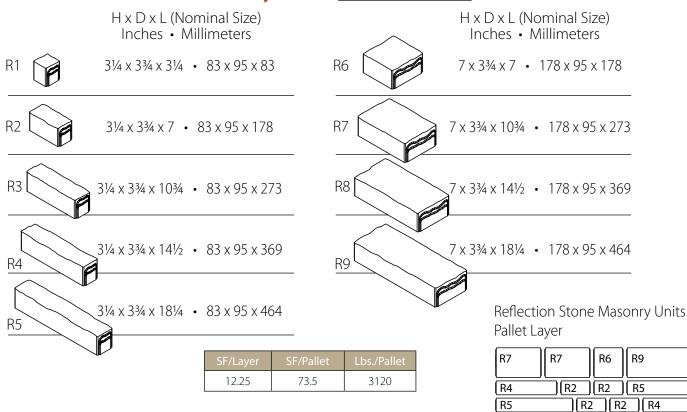

R9

R5

R4

R8

R2 R8

R1 R4

R3

][R3

R6


R7


) (R3

R3

R6


Sizes Reflection Stone Masonry Units • Thin Veneers – Field Applied

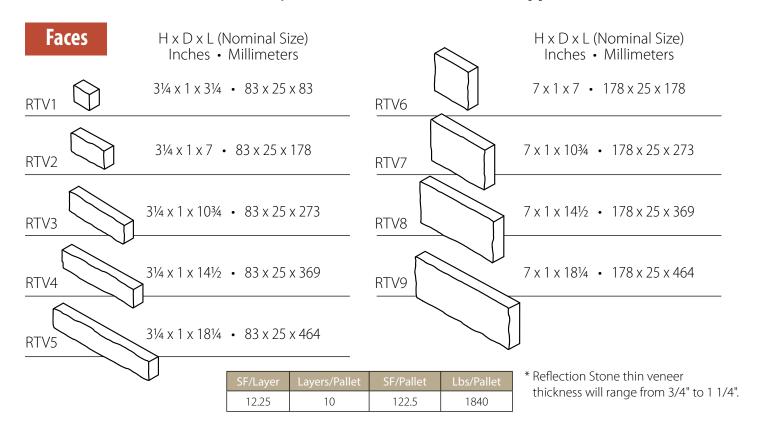

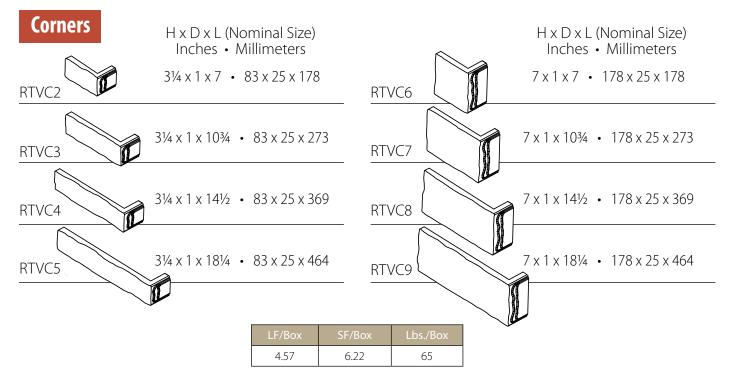


- Reflection Stone thin veneer thickness will range from 3/4" to 1 1/4".
- All Return Ends are 3 3/4" in depth.


Sizes Reflection Stone GRAND Masonry Units • Full Veneer Units

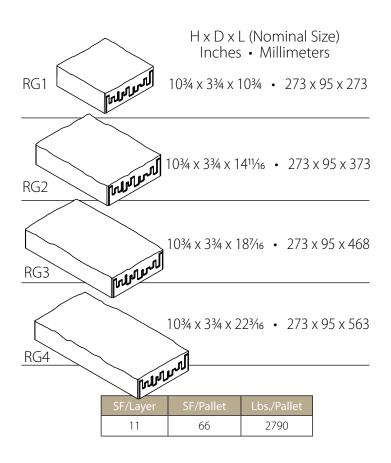

Reflection Stone Grand Masonry Units Pallet Layer




Sizes Reflection Brick Masonry Units • <u>Full Veneer Units</u>

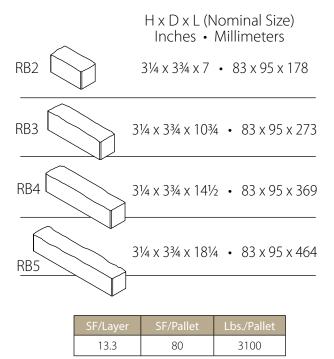


Reflection Brick Masonry Units Pallet Layer

RB2	RB5				RB3	
RB3	RB3			RB4		
RB5			RB5			
RB2	RB3		RB3			RB2
RB4		RB3			RB3	
RB3	RB4				RB3	
RB5			RB5			
RB2	RB3		RB3			RB2
RB3	RB3			RB4		
RB3	RB4				RB3	
RB5	-		RB5			
RB3	RB4				RB3	
RB2	RB3		RB3			RB2
RB4		RB3			RB3	


Sizes Reflection Stone GRAND Masonry Units • Thin Veneers – Field Applied

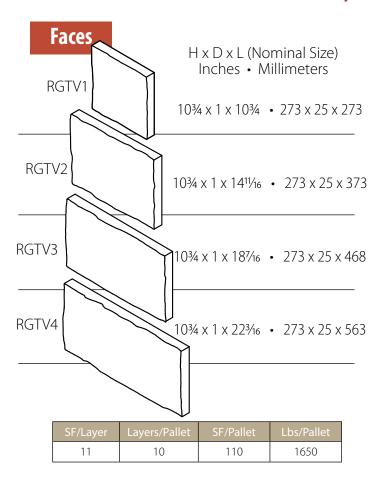


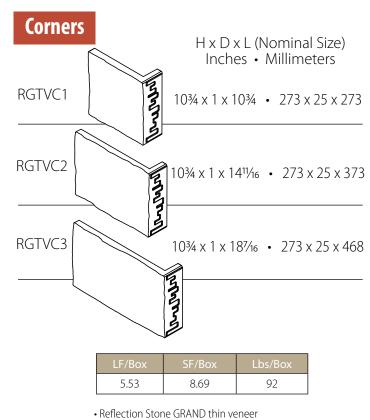

- Reflection Stone GRAND thin veneer thickness will range from 3/4" to 1 1/4".
- All Return Ends are 3 3/4" in depth.

Sizes Reflection Brick Masonry Units • Thin Veneers — Field Applied

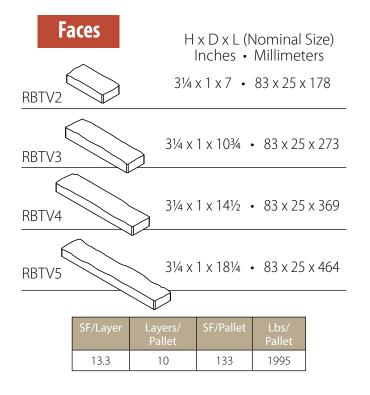


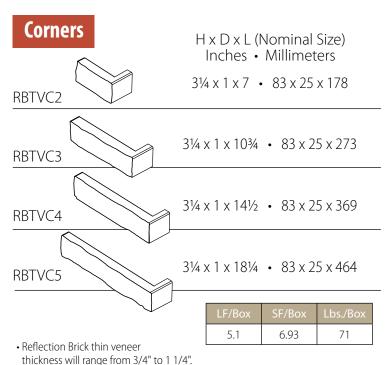


• All Return Ends are 3 3/4" in depth.


Color Options Reflection Stone & Reflection Stone GRAND Masonry Units

Blended Colors

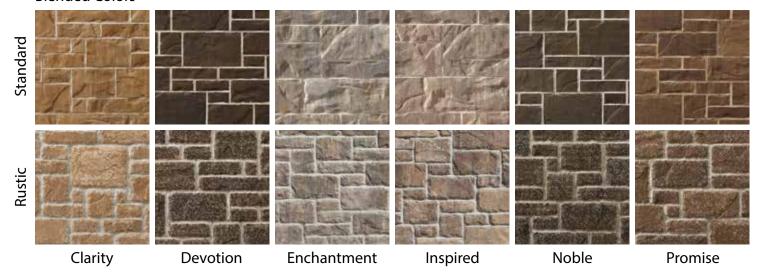

Blended Colors




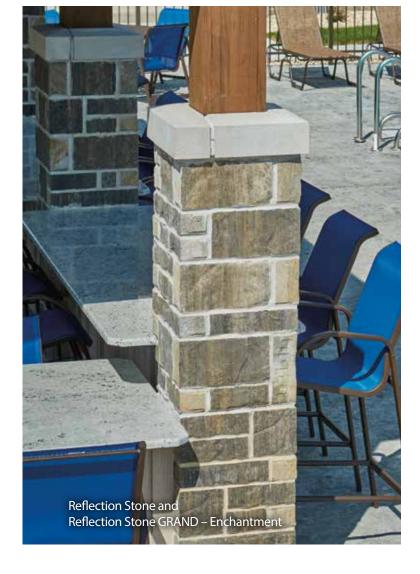

Color Options Reflection Brick Masonry Units

Blended Colors



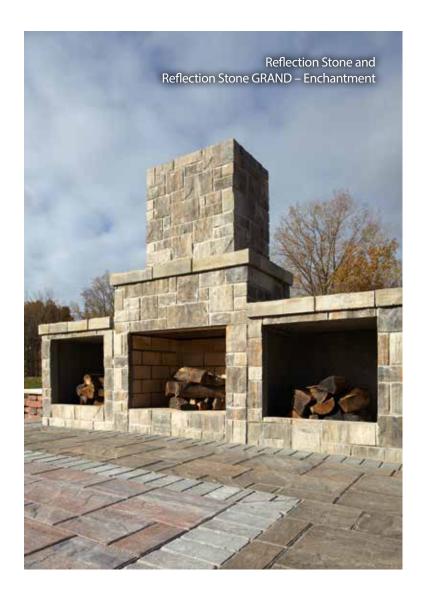

Blended Colors





Align International

Natural Stone Veneer Collection

Whether Align International products are used indoors or out, for new construction or major remodels and renovations, contractors and architects recognize and appreciate the line's quality materials and ease of installation.



Align International products are unlike many other natural thin stones that typically require sizing, cutting and fitting individual pieces in a project. Align International components allow for a faster and more economical construction process with minimal cutting. Thin veneer panels are easy to handle and fit together seamlessly to replicate the look of custom handcrafted stonework.

Color Options Align International – Natural Stone Veneer Collection

Traditional Ledge Stone Panels











Autumn Leaf

Charcoal Delight

Creamy White

Crystal White

Sunset Gold

Natural Ledge Stone Panels













Alice Gray

Autumn Leaf

Charcoal Delight

Creamy Beige

Light Maroon

Sunset Gold

Accent Ledge Stone Panels













Autumn Leaf

Fantastic Gold

Sunset Gold

Birchwood

Sandwood Brown

White Cloud

Polished Ledge Stone Panels








Black Dragon

Golden Flowers

Roman Beige



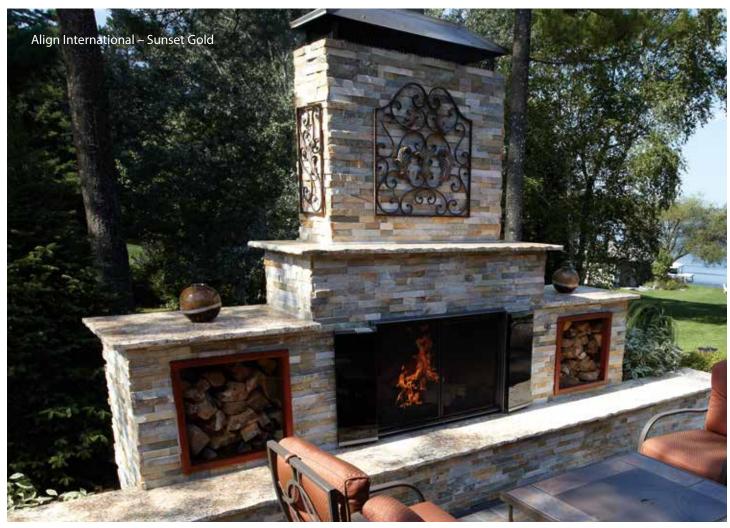



Isokern Fireplace, Oven and Chimney Products

After 70 years of unparalleled performance in the construction industry, Earthcore's Isokern line has become the most trusted modular system in the world. Isokern Fireplace & Chimney components are lightweight, while retaining UL 127 and UL 103HT (respectively) listings. Consequently, Isokern Fireplace & Chimney Systems are less expensive to install than traditional masonry fireplaces. And, unlike typical metal box fireplaces or concrete systems, they are built to last forever.

Isokern Outdoor Fireplace Shell



(Nominal Size)

Product	Size D x H x L (inches)	Units/ Pallet	Lbs./ Unit	Lbs./ Pallet
Standard 36" Firebox	25 ¼ x 63 ¼ x 43	1	1205	1250
Standard 42" Firebox	25 ¼ x 63 ¼ x 49	1	1325	1370
Standard 46" Firebox	25 1/4 x 63 1/4 x 53	1	1450	1495



(Nominal Size)

Product	Size D x H x L (inches)	Units/ Pallet	Lbs./ Unit	Lbs./ Pallet
Magnum 36" Firebox	25 1/4 x 69 ³ /4 x 43	1	1300	1345
Magnum 42" Firebox	25 ¼ x 69¾ x 49	1	1420	1465
Magnum 46" Firebox	25 ½ x 69¾ x 53	1	1600	1645

Additional Products Offered:

Damper in 36", 42" and 48", Starter Flue, Inner Liner, Outer Casing, Offset Block, Black Rain Cap

Iso'ven Table Top Kit



EM40 Mono Chimney



DM54 Chimney System





Inner

Outer







DM Chimney Accessories



Brick Ledge

Offset Block

Related Outdoor Living Items

Fire Pit Products

For additional information on Fire Pit construction, refer to Summit Stone Fire Pit Designs (on page 161).

Corrugated Fire Pit Insert



Steel Fire Pit Inserts





Manhole Block Fire Pit

(No photo available)

- Manhole Block 24" diameter ring requires 8 pieces, 8" high (sold per piece)
- Manhole Block 48" diameter ring requires 12 pieces, 8" high (sold per piece)

Fire Pit Product Sizes

Product	Size
Corrugated Fire Pit Insert	36" Diameter
Steel Fire Pit Insert	36" Diameter
Steel Fire Pit Insert	42" Diameter
Steel Fire Pit Insert	48" Diameter
Square Steel Fire Pit Insert	36" Square
Manhole Block Fire Pit	24" Diameter
Manhole Block Fire Pit 48" Diameter	





Landscape Stone

- Natural Stone
- Palletized Fieldstone
- Bulk Cobblestone
- Outcropping Boulders
- Palletized Outcropping Boulders
- Fond du Lac Outcropping Stone
- Natural Stone Drywall
- Natural Stone Steppers
- Bulk Bag Aggregates
- River Run® & Hidden Trails™
 Bagged Landscape Products



The color photos shown in this catalog were prepared with careful attention to accuracy. However, colors shown may vary from actual hues and should only be used as a guide. Refer to actual product samples for final color selection. Because concrete units are manufactured with high quality, naturally-mined aggregates and materials, variations in color or shading should be expected in products that are manufactured at different times and in units having different shapes. This color or shading variation is acceptable in the industry.

Natural Stone

- Bulk Cobblestone/Fieldstone



Product	Size (inches)
Bulk Cobblestone	3 - 6
Bulk Cobblestone	4 - 8
Bulk Cobblestone	8 - 12
Bulk Cobblestone	12 - 18
Bulk Cobblestone	18 - 24
Bulk Cobblestone	24 - 36
Bulk Cobblestone	36 & Up

Note: Product is sold by the ton

• Products also available in 2000 lb. and 3000 lb. Bags

Natural Stone – Outcropping Boulders



Product	Lbs./Unit
Outcropping Fieldstone	1-2.5 tons
Outcropping Limestone	1-2.5 tons
Outcropping Basin Blue	1-2.5 tons
Outcropping Copper Springs	1-2.5 tons

Natural Stone

- Palletized Outcropping Boulders



Product	Size (inches)	Lbs./Pallet
Palletized Outcropping Fieldstone	Varies	Varies
Palletized Outcropping Limestone	Varies	Varies
Palletized Outcropping Basin Blue	Varies	Varies
Palletized Outcropping Copper Springs	Varies	Varies

Fond du Lac Outcropping Stone



Note: Product is sold by the ton

Natural Stone Drywall



Note: Product is sold by the ton

Natural Stone Steppers



Note: Product is sold by the ton

Bulk Bag Aggregates



Aggregates
Basin Blue 11/2"
Copper Springs 11/4"
Multi Purpose Gravel
Pea Stone 3/8"
River Rock 3/4"
River Rock 11/2"

Sands
Mason Sand
Paver Base
Paver Leveling Sand

• Products Available in 2000 lb. and 3000 lb. Bags

Hidden Trails™ Bagged Landscape Products





Category	Product	Volume (cf)	Units/Pallet
Aggregate	American Heritage 1½"	1/2	63
Sand & Soil	Top Soil	3/4	70
Sand & Soil	Potting Soil	3/4	70
Sand & Soil	Cow Manure Mix	1	75
Sand & Soil	Play Sand	1/2	63

River Run® Bagged Landscape Products





Category	Product	Volume (cf)	Units/ Pallet
Sand & Soil	Peat	3/4	70
Sand & Soil	White Play Sand	1/2	63
Sand & Soil	Mason Sand	1/2	63
Sand & Soil	Trac Sand	60 lbs.	54
Sand & Soil	Paver Base	1/2	63
Sand & Soil	Leveling Sand	1/2	63

Category	Product	Volume (cf)	Units/ Pallet
Aggregate	American Heritage 3/4"	1/2	63
Aggregate	Basin Blue 3/4"	1/2	63
Aggregate	Black Earth 11/2"	1/2	63
Aggregate	Copper Springs 11/4"	1/2	63
Aggregate	Glacier Bay 11/2"	1/2	63
Aggregate	Red Lava Rock	1	70
Aggregate	Meramac 5/8"	1/2	63
Aggregate	Pea Stone 3/8"	1/2	63
Aggregate	White Marble Stone	.4	77
Aggregate	River Cobble 2-3"	1/2	63
Aggregate	Western Sunset	1/2	84
Aggregate	Multi Purpose Gravel	1/2	63
Aggregate	Mountain Blend	1/2	63
Aggregate	Blue River	1/2	63



County Materials' Landscape & Masonry Locations:

Antigo

908 Hickory St. Antigo, WI 54409 715-623-3775

Appleton

3019 W Prospect Ave. Appleton, WI 54914 920-734-7733

Eau Claire

1111 Menomonie St. Eau Claire, WI 54702 715-834-7701

Green Bay

2448 Century Rd. Green Bay, WI 54303 920-497-2416

Hazelhurst

6857 US Hwy 51 Hazelhurst, WI 54531 715-356-1174

Holmen

611 Empire St. Holmen, WI 54636 608-526-9020

Madison

6399 Nesbitt Rd. Madison, WI 53719 608-845-8636

Marathon

205 North St. Marathon, WI 54448 715-848-1365

Oak Creek

7200 S 10th St. Oak Creek, WI 53154 414-764-8700

Rice Lake

3200 S Main St. Rice Lake, WI 54868 715-234-8145

Roberts

1203 70th Ave. Roberts, WI 54023 715-749-4121

Stevens Point

2000 Patch St. Stevens Point, WI 54481 715-341-0991

Tomahawk

407 S Tomahawk Ave. Tomahawk, WI 54487 715-453-5463

Waukesha

W229N2450 Homewood Ct. Waukesha, WI 53186 262-896-0755

Wausau

406 Winton St. Wausau, WI 54403 715-842-2288


Weston

9303 Schofield Ave. Weston, WI 54476 715-359-7731

Wisconsin Rapids

2310 N 40th St. Wisconsin Rapids, WI 54494 715-423-7339

Contact Customer Service at (800) 242-7733 or visit our website at www.countymaterials.com for additional information about County Materials' Dealer Locations.

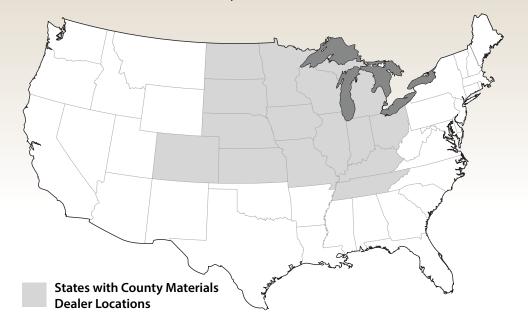

We value your business. Please contact your County Materials' representative for specific information on products and their availability in your area.



The color photos shown in this catalog were prepared with careful attention to accuracy. However, colors shown may vary from actual hues and should only be used as a guide. Refer to actual product samples for final color selection. Because concrete units are manufactured with high quality, naturally-mined aggregates and materials, variations in color or shading should be expected in products that are manufactured at different times and in units having different shapes. This color or shading variation is acceptable in the industry.

